



Finish Cutting Breaker of Cermet Grade for Steels

**NX2525
MP3025**

FP Breaker

Item
Expansion

**Better choice for finish cutting of steels
offers good chip control in wide cutting
conditions.**

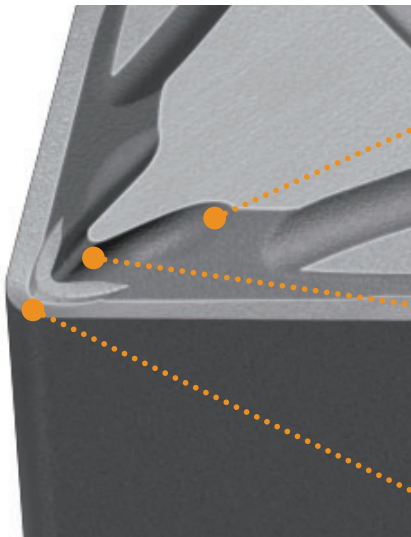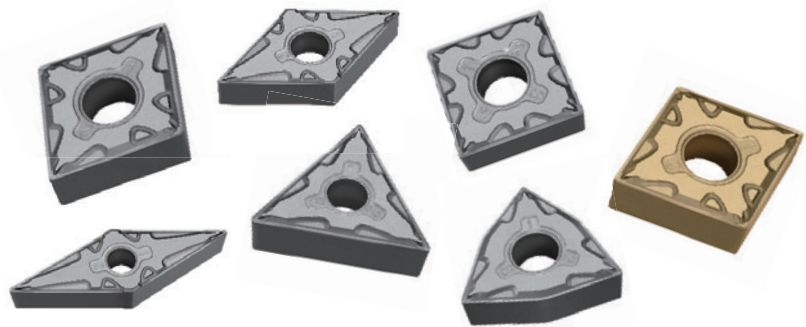



Stable Chip Control in Wide Range

1st and 2nd convex and recess geometry provide stable chip control. 1st convex provides excellent chip control in low feed rates.

Available to Both General and Low Carbon Steel Cutting


2nd convex is effective for chip control of soft materials.

A Good Surface Finish Through the 20° Positive High Rake Angle

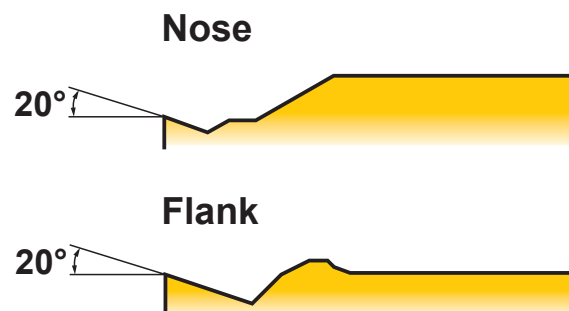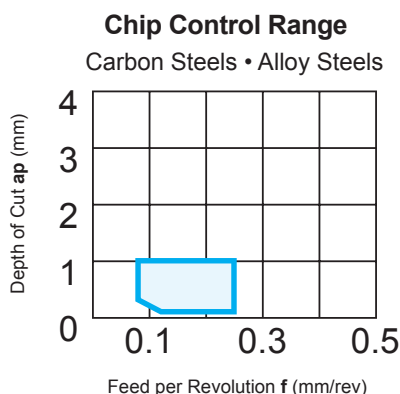

Negative Inserts (With Hole)

M Class

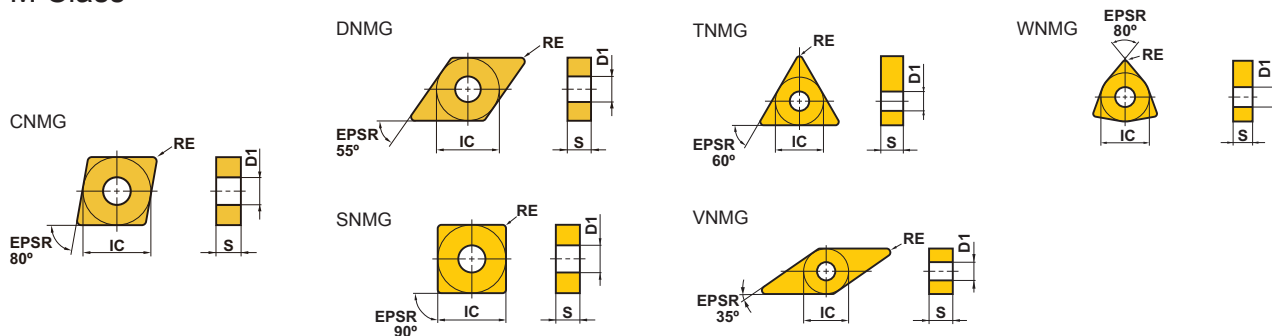

									(mm)								
Order Number	Cutting Area	MP3025	NX2525		IC	S	RE	D1	Order Number	Cutting Area	MP3025	NX2525		IC	S	RE	D1
CNMG120402-FP	F	●	●		12.7	4.76	0.2	5.16	TNMG160402-FP	F	●	●		9.525	4.76	0.2	3.81
CNMG120404-FP	F	●	●		12.7	4.76	0.4	5.16	TNMG160404-FP	F	●	●		9.525	4.76	0.4	3.81
CNMG120408-FP	F	●	●		12.7	4.76	0.8	5.16	TNMG160408-FP	F	●	●		9.525	4.76	0.8	3.81
NEW CNMG120412-FP	F	●	●		12.7	4.76	1.2	5.16	NEW TNMG160412-FP	F	●	●		9.525	4.76	1.2	3.81
DNMG150402-FP	F	●	●		12.7	4.76	0.2	5.16	VNMG160402-FP	F	●	●		9.525	4.76	0.2	3.81
DNMG150404-FP	F	●	●		12.7	4.76	0.4	5.16	VNMG160404-FP	F	●	●		9.525	4.76	0.4	3.81
DNMG150408-FP	F	●	●		12.7	4.76	0.8	5.16	VNMG160408-FP	F	●	●		9.525	4.76	0.8	3.81
NEW DNMG150412-FP	F	●	●		12.7	4.76	1.2	5.16	NEW VNMG160412-FP	F	●	●		9.525	4.76	1.2	3.81
DNMG150602-FP	F	●	●		12.7	6.35	0.2	5.16	WNMG080402-FP	F	●	●		12.7	4.76	0.2	5.16
DNMG150604-FP	F	●	●		12.7	6.35	0.4	5.16	WNMG080404-FP	F	●	●		12.7	4.76	0.4	5.16
DNMG150608-FP	F	●	●		12.7	6.35	0.8	5.16	WNMG080408-FP	F	●	●		12.7	4.76	0.8	5.16
NEW DNMG150612-FP	F	●	●		12.7	6.35	1.2	5.16	NEW WNMG080412-FP	F	●	●		12.7	4.76	1.2	5.16
SNMG120404-FP	F	●	●		12.7	4.76	0.4	5.16									
SNMG120408-FP	F	●	●		12.7	4.76	0.8	5.16									
NEW SNMG120412-FP	F	●	●		12.7	4.76	1.2	5.16									

● : Inventory maintained in Japan. (10 inserts in one case)

Recommended Cutting Conditions

									(mm)	
Work Material	Properties	Cutting Range	Cutting Conditions	Grade	Chip Breaker	vc (m/min)	f (mm/rev)	ap		
P	Carbon Steels • Alloy Steels	Finish Cutting	Stable Cutting	NX2525	FP	210—300	0.08—0.25	0.10—1.00		
			General Cutting	MP3025	FP	215—330	0.08—0.25	0.10—1.00		

For Your Safety
●Don't handle inserts and chips without gloves. ●Please machine within the recommended application range and exchange expired tools with new ones in advance of breakage. ●Please use safety covers and wear safety glasses. ●When using compounded cutting oils, please take fire precautions. ●When attaching inserts or spare parts, please use only the correct wrench or driver. ●When using rotating tools, please make a trial run to check run-out, vibration and abnormal sounds etc.

MITSUBISHI MATERIALS CORPORATION

MMC HARDMETAL INDIA PVT LTD **Head Office**

Prasad Enclave, #118/119, 1st Floor, 2nd Stage BBMP Ward #11,
(New #38), Industrial Suburb, Yeshwanthpura, Bengaluru-560 022
Karnataka, India, Tel : +91 80 2204 3600
E-mail : mb-mmci@mmc.co.jp

REGIONAL OFFICES

Pune Office

Plot No, A-27 & A-28, H-Block,
Pimpri Waghere, Pimpri Industrial Area MIDC,
Pune – 411018, Maharashtra, India
Tel :: +91 020-27456959

Gurgaon Office

#407, 4th Floor, JMD Galleria, Sohna Road,
Opposite Malibu Town, Sector-48,
Gurgaon-122 001 Haryana, India.
Tel : +91 124 4089163

Chennai Office

MM Complex, 2Nd Floor, Part 30/10 Hopman 2nd
Street, 100 Feet Main Road, Alandur,
Chennai – 600 016 Tamilnadu, India.
Tel: +91 44 4550 7006

Ahmedabad Office

210, Sigma Arcade, 2nd Floor, Visat Circle,
Ahmedabad-Mehsana Road, Chandkheda,
Ahmedabad – 382 424, Gujarat, India.
Tel : +91 79 2329 9300

<http://www.mitsubishicarbide.com/en/>
(Tools specifications subject to change without notice.)