

Threading







MMT Series









Inserts
Expansion

For high precision machining of a wide range of threading applications



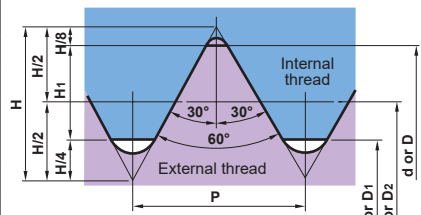
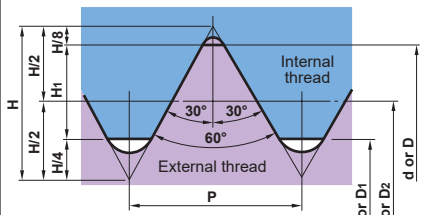
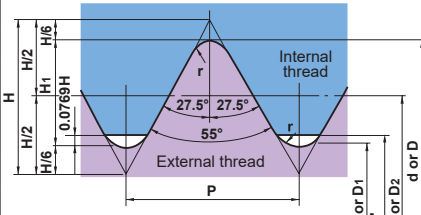
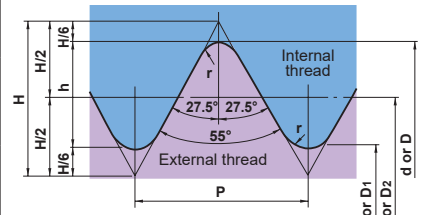
THREAD PITCH CROSS REFERENCE

Application		General machining				Pipe fittings and couplings for gas and water	
Type		Partial Profile 60°	Partial Profile 55°	ISO Metric	American UN	Parallel Pipe Thread Whitworth for BSW, BSP	American NPT
							
Symbol		M UNC UNF	W	M	UNC UNF	G(PF) Rp(PS) W	NPT
Holder	Pitch	mm (thread/inch)	thread/inch	mm	thread/inch	thread/inch	thread/inch
MMT Holder 	Full form	—	—	0.5—5.0	32—5	28—5	27, 18, 14 11.5, 8
	Partial form	0.5—5.0 (48—5)	48—5	0.5—5.0	48—5	—	—
⚠ P.13							
MMT Boring Bars 	Full form	—	—	0.5—5.0	32—5	28—5	27, 18, 14 11.5, 8
	Partial form	0.5—5.0 (48—5)	48—5	0.5—5.0	48—5	—	—
⚠ P.18							


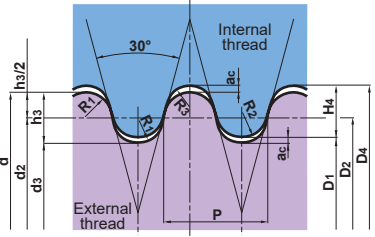
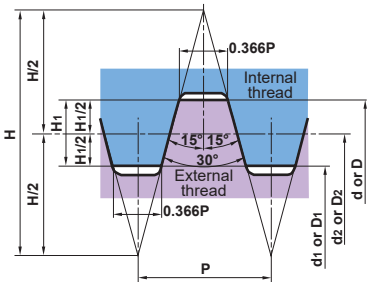


	Steam, gas and water line pipes		Pipe couplings for food and fire fighting industries	Motion transmissions		Aircraft and aerospace	Oil and gas	
	Taper Pipe Thread BSPT	American NPTF	Round DIN 405	ISO Trapezoidal 30°	American ACME	UNJ	API Buttress Casing	API Round Casing&Tubing
								
	R(PT) Rc(PT) Rp	NPTF	Rd	Tr (TM)	ACME (Tw)	UNJ	BCSG	CSG LCSG
	thread/inch	thread/inch	thread/inch	mm	thread/inch	thread/inch	thread/inch	thread/inch
	28, 19 14, 11	27, 18, 14 11.5, 8	10, 8 6, 4	1.5, 2 3, 4, 5	12, 10 8, 6, 5	32—8	5	10, 8
	—	—	—	—	—	—	—	—
	19, 14, 11	14, 11.5, 8	10, 8 6, 4	1.5, 2 3, 4, 5	12, 10 8, 6, 5	—	5	10, 8
	—	—	—	—	—	*	—	—

* When machining an internal UNJ thread, drill an internal hole with the appropriate diameter. Then machine with 60° American UN. In this case, a full form type insert cannot be used.

STANDARD THREAD AND CORRESPONDING INSERT / HOLDER

Thread Name	Standard Thread Type	Type	Ext./Int.	Insert Number	Wiper/General	Tool Holder	Page
ISO Metric	 $H=0.866025P$ $d_2=d-0.649519P$ $H_1=0.541266P$ $d_1=d-1.082532P$ $D=d$ $D_2=d_2$ $D_1=d_1$	M	Ext.	MMT $\odot\odot$ ER $\odot\odot$ ISO	Wiper	MMTER $\odot\odot\odot\odot\odot$ -C	P.13
				MMT $\odot\odot$ ER $\odot\odot$ ISO-S	Wiper		
				MMT $\odot\odot$ ER $\odot\odot$ 60	General		
				MMT $\odot\odot$ ER $\odot\odot$ 60-S	General		
			Int.	MMT $\odot\odot$ IR $\odot\odot$ ISO	Wiper	MMTIR $\odot\odot$ A $\odot\odot\odot$ -SP $\odot$ MMTIR $\odot\odot$ A $\odot$ 16-C	P.18
				MMT $\odot\odot$ IR $\odot\odot$ ISO-S	Wiper		
				MMT $\odot\odot$ IR $\odot\odot$ 60	General		
				MMT $\odot\odot$ IR $\odot\odot$ 60-S	General		
American UN	 $H=0.866025P$ $d_2=d-0.649519P$ $H_1=0.541266P$ $d_1=d-1.082532P$ $D=d$ $D_2=d_2$ $D_1=d_1$ $P=25.4/\text{thread}$	UNC UNF	Ext.	MMT $\odot\odot$ ER $\odot\odot$ UN	Wiper	MMTER $\odot\odot\odot\odot\odot$ -C	P.13
				MMT $\odot\odot$ ER $\odot\odot$ UN-S	Wiper		
				MMT $\odot\odot$ ER $\odot\odot$ 60	General		
				MMT $\odot\odot$ ER $\odot\odot$ 60-S	General		
			Int.	MMT $\odot\odot$ IR $\odot\odot$ UN	Wiper	MMTIR $\odot\odot$ A $\odot\odot\odot$ -SP $\odot$ MMTIR $\odot\odot$ A $\odot$ 16-C	P.18
				MMT $\odot\odot$ IR $\odot\odot$ UN-S	Wiper		
				MMT $\odot\odot$ IR $\odot\odot$ 60	General		
				MMT $\odot\odot$ IR $\odot\odot$ 60-S	General		
Whitworth for BSW, BSP	 $H=0.9605P$ $d_2=d-H_1$ $d_1=d-2H_1$ $r=0.1373P$ $H_1=0.6403P$ $D_1'=d_1+2\times0.0769H$ $D=d$ $D_2=d_2$ $D_1=d_1$ $P=25.4/\text{thread}$	W	Ext.	MMT $\odot\odot$ ER $\odot\odot$ W	Wiper	MMTER $\odot\odot\odot\odot\odot$ -C	P.13
				MMT $\odot\odot$ ER $\odot\odot$ W-S	Wiper		
				MMT $\odot\odot$ ER $\odot\odot$ 55	General		
				MMT $\odot\odot$ ER $\odot\odot$ 55-S	General		
			Int.	MMT $\odot\odot$ IR $\odot\odot$ W	Wiper	MMTIR $\odot\odot$ A $\odot\odot\odot$ -SP $\odot$ MMTIR $\odot\odot$ A $\odot$ 16-C	P.18
				MMT $\odot\odot$ IR $\odot\odot$ W-S	Wiper		
				MMT $\odot\odot$ IR $\odot\odot$ 55	General		
				MMT $\odot\odot$ IR $\odot\odot$ 55-S	General		
Parallel Pipe Thread	 $H=0.960491P$ $d_2=d-h$ $d_1=d-2h$ $r=0.137329P$ $h=0.640327P$ $D=d$ $D_2=d_2$ $D_1=d_1$ $P=25.4/\text{thread}$	PF G Rp	Ext.	MMT $\odot\odot$ ER $\odot\odot$ W	Wiper	MMTER $\odot\odot\odot\odot\odot$ -C	P.13
				MMT $\odot\odot$ ER $\odot\odot$ W-S	Wiper		
			Int.	MMT $\odot\odot$ IR $\odot\odot$ W	Wiper	MMTIR $\odot\odot$ A $\odot\odot\odot$ -SP $\odot$ MMTIR $\odot\odot$ A $\odot$ 16-C	P.18
				MMT $\odot\odot$ IR $\odot\odot$ W-S	Wiper		

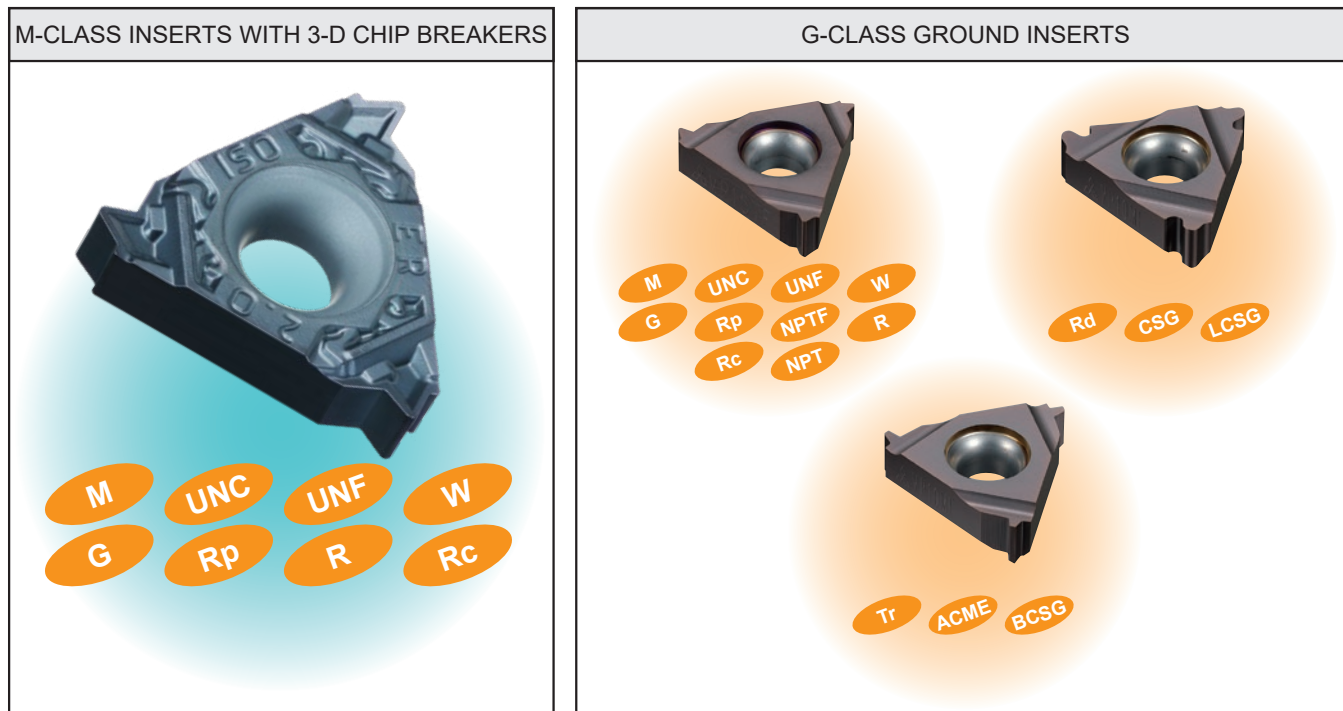
Wiper : Insert order number is determined by selected pitch.
 General : An insert is applicable to several pitch types.

Thread Name	Standard Thread Type	Type	Ext./Int.	Insert Number	Wiper/General	Tool Holder	Page
BSPT	 Thread centre axis $H=0.960237P$ $h=0.640327P$ $r=0.137278P$ $P=25.4/\text{thread}$	BSPT	Ext.	MMT $\odot\odot\odot$ ER $\odot\odot\odot$ BSPT	Wiper	MMTER $\odot\odot\odot\odot\odot\odot$ -C	P.13
			Ext.	MMT $\odot\odot\odot$ ER $\odot\odot\odot$ BSPT-S	Wiper		
			Int.	MMT $\odot\odot\odot$ IR $\odot\odot\odot$ BSPT	Wiper	MMTIR $\odot\odot\odot$ A $\odot\odot\odot$ -SP $\odot$ MMTIR $\odot\odot\odot$ A $\odot$ 16-C	P.18
			Int.	MMT $\odot\odot\odot$ IR $\odot\odot\odot$ BSPT-S	Wiper		
Round DIN 405	 $a_c=0.05P$ $h_3=H_4=0.5P$ $R_1=0.238507P$ $R_2=0.255967P$ $R_3=0.221047P$ $P=25.4/\text{thread}$	Rd	Ext.	MMT $\odot\odot\odot$ ER $\odot\odot\odot$ RD	Wiper	MMTER $\odot\odot\odot\odot\odot\odot$ -C	P.13
			Int.	MMT $\odot\odot\odot$ IR $\odot\odot\odot$ RD	Wiper	MMTIR $\odot\odot\odot$ A $\odot\odot\odot$ -SP $\odot$ MMTIR $\odot\odot\odot$ A $\odot$ 16-C	P.18
ISO Trapezoidal 30°	 $H=1.866P$ $d_2=d-0.5P$ $d_1=d-P$ $H_1=0.5P$ $D=d$ $D_2=d_2$ $D_1=d_1$	Tr	Ext.	MMT $\odot\odot\odot$ ER $\odot\odot\odot$ TR	Wiper	MMTER $\odot\odot\odot\odot\odot\odot$ -C	P.13
			Int.	MMT $\odot\odot\odot$ IR $\odot\odot\odot$ TR	Wiper	MMTIR $\odot\odot\odot$ A $\odot\odot\odot$ -SP $\odot$ MMTIR $\odot\odot\odot$ A $\odot$ 16-C	P.18
American ACME		ACME	Ext.	MMT $\odot\odot\odot$ ER $\odot\odot\odot$ ACME	Wiper	MMTER $\odot\odot\odot\odot\odot\odot$ -C	P.13
			Int.	MMT $\odot\odot\odot$ IR $\odot\odot\odot$ TACME	Wiper	MMTIR $\odot\odot\odot$ A $\odot\odot\odot$ -SP $\odot$ MMTIR $\odot\odot\odot$ A $\odot$ 16-C	P.18
American NPT	 $H=0.866025P$ $h=0.800000p$	NPT	Ext.	MMT $\odot\odot\odot$ ER $\odot\odot\odot$ NPT	Wiper	MMTER $\odot\odot\odot\odot\odot\odot$ -C	P.13
			Int.	MMT $\odot\odot\odot$ IR $\odot\odot\odot$ NPT	Wiper	MMTIR $\odot\odot\odot$ A $\odot\odot\odot$ -SP $\odot$ MMTIR $\odot\odot\odot$ A $\odot$ 16-C	P.18

Wiper : Insert order number is determined by selected pitch.
General : An insert is applicable to several pitch types.

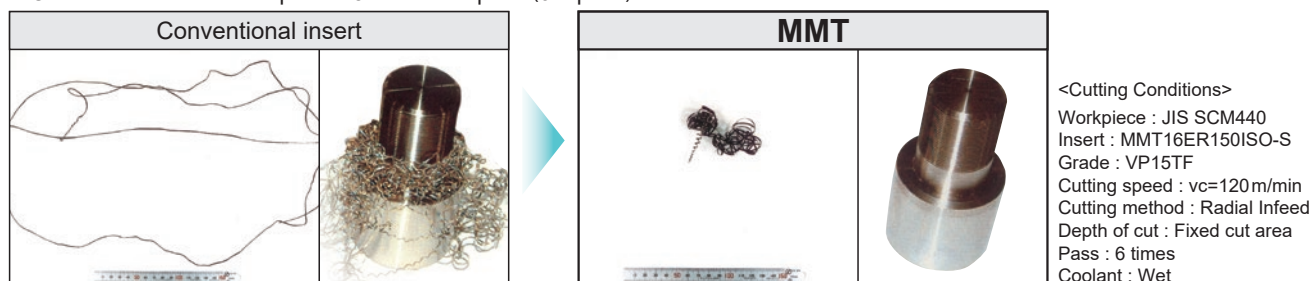
MMT SERIES FEATURES

■ A WIDE VARIETY OF PRODUCTS

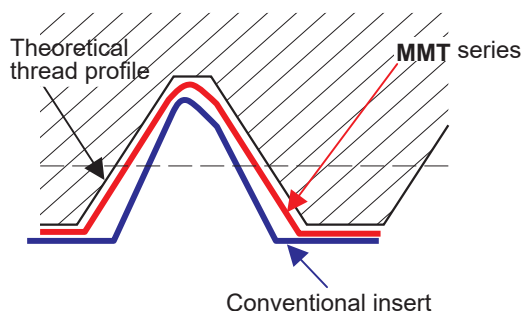


■ IDEAL CHIP CONTROL EVEN IN THE LATTER HALF OF PASSES WHEN CONTINUOUS CHIPS ARE USUALLY PRODUCED. (M-CLASS INSERTS WITH 3-D CHIP BREAKERS)

ISO metric external thread pitch 1.5mm Final pass (6th pass)



■ A HIGHER LEVEL OF PRECISION THAN CONVENTIONAL INSERTS (G-CLASS GROUND INSERTS)



High precision threading can be achieved by using MMT inserts that feature a ground rake face and peripheral cutting edge.


Thread Type	Threading Tolerance
ISO Metric	6g / 6H
American UN	2A / 2B
Whitworth for BSW, BSP	Medium Class A
BSPT	Standard BSPT
Round DIN 405	7h / 7H
ISO Trapezoidal 30°	7e / 7H
American ACME	3G
UNJ	3A
API Buttress Casing	Standard API
API Rounded Casing & Tubing	Standard API RD
American NPT	Standard NPT
American NPTF	Class2

NEW


AG type is added to the accurate M-class type 3D chipbreaker


For general purpose 60° and 55° inner/outer diameter threading, the AG type has been added to the precision M-class 3D chip breaker range, which is applicable to 48-8 threads and a pitch of 0.5-3.0mm to meet a wide range of needs.

The M-class precision 3D chipbreaker improves chip control and contributes to tool cost reduction.



CHOOSING M-CLASS INSERTS WITH 3-D CHIP BREAKERS OR G-CLASS INSERTS

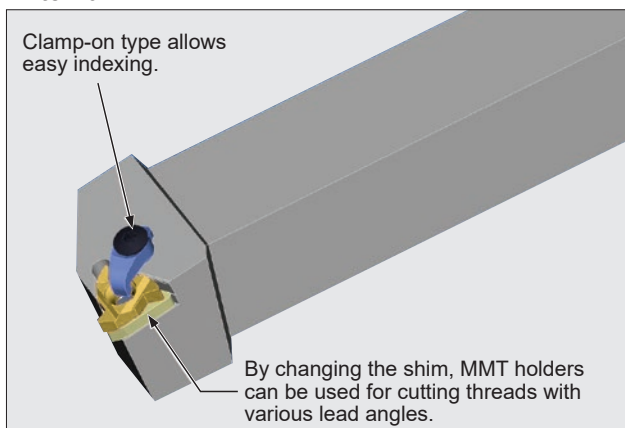
Insert	Chip control	Precision of thread
M-class inserts with 3-D chip breakers 		

Insert	Chip control	Precision of thread
G-class inserts 		

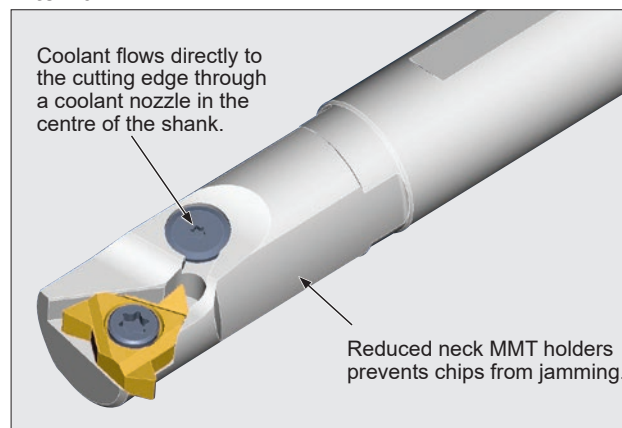
- For ideal chip control and a high cost performance ratio, M-class inserts with 3-D chip breakers are recommended.
- G-class inserts are recommended where higher precision is required.

HOLDER (Use of special surface treatment)

External

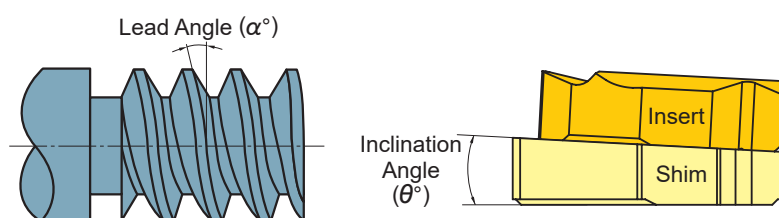


Internal



* Order number of coolant guide screw: TFS03006
(Except MMTIR1316/MMTIR1516)

SUITABLE FOR THREADS WITH A LARGE LEAD ANGLE



By changing only the shim, MMT holders can be used for turning left hand threads and threads with various lead angles.

Lead Angle (α°)	Inclination Angle (θ°)
-1.5°	-3°
-0.5°	-2°
0.5°	-1°
1.5°	0°
2.5°	1°
3.5°	2°
4.5°	3°


 Standard shim delivered with the holder.

PVD coated carbide grade for stable threading

MP9025 Tough grade with an emphasis on cutting edge stability.

Demonstrates excellent fracture resistance when machining at low cutting speeds, internal machining, and even on small corner R sizes.

With excellent adhesion resistance, it is effective in machining heat resistant alloys and precipitation hardening stainless steel.

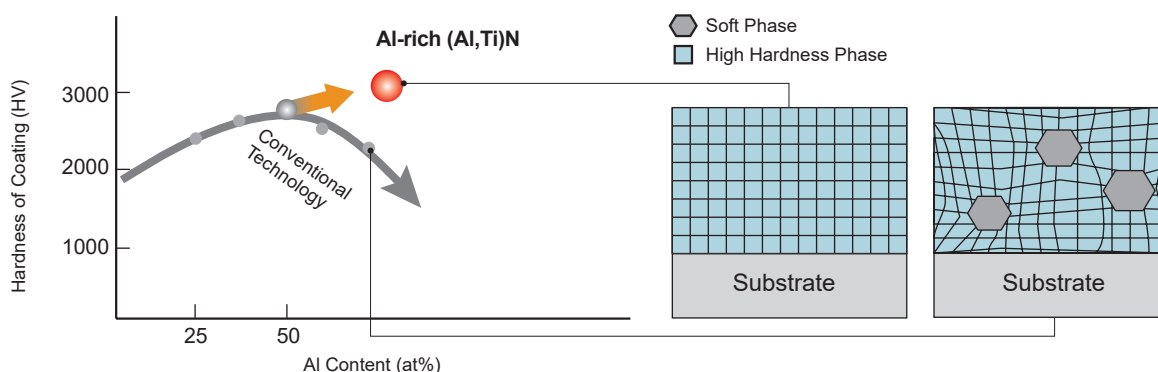


Al-rich (Al,Ti)N Single Layer Coating Technology

Special Cemented Carbide Substrate

Al-rich and Conventional Coating Comparison

The Al-rich (Al,Ti)N single layer coating provides stabilization of the high hardness phase and succeeds in dramatically improving wear, crater and welding resistance.



VP10MF

High wear and plastic deformation resistance for threading when maintaining an accurate thread form. Suitable for continuous high precision machining with extensive tool life. Effective in combination with G-class inserts for high precision threading.

VP15TF





High fracture resistance during low rigidity applications such as bar feed machining. Able to withstand harsh conditions for long periods where conventional inserts would be liable to breakage. Effective combination of high cost performance M-class inserts with 3-D chip breakers.

VP20RT

Suitable for stainless steel boring and unstable machining where inserts are vulnerable to fracturing. Effective combination of high cost performance M-class inserts with 3-D chip breakers.

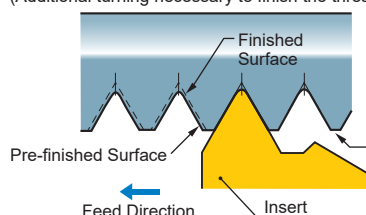
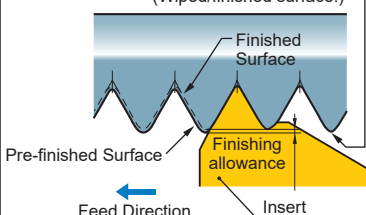
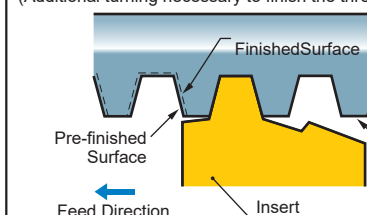
THREADING METHODS

THREADING METHODS





	Right Hand Thread	Left Hand Thread
EXTERNAL	 Holder Reversed	 Holder Reversed
INTERNAL		

- Usually, threads are cut with the feed towards the chuck.
- When machining left hand threads, note that clamping rigidity is lowered due the application of back turning.
- When machining left hand threads, the lead angle is negative. Ensure an appropriate lead angle by changing the shim.

INSERT TYPES

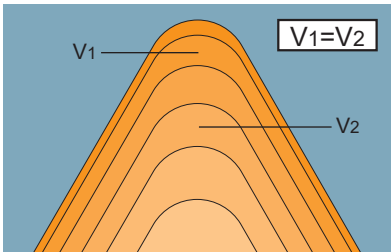
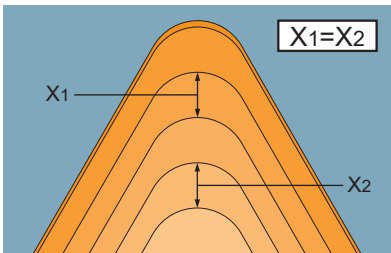
Partial form	Full form	Semi-full form (Trapezoidal threads only)
● The same insert can be used for a range of pitches. ● Shorter tool life because the corner radius of the insert is smaller than that of the full form insert. ● Finishing with another operation is necessary.	● No deburring needed after threading. ● Requires different threading inserts.	● No deburring needed after threading. ● Requires different threading inserts. ● Finishing with another operation is necessary.
Crest Radius (Additional turning necessary to finish the thread crest.)  Pre-finished Surface Finished Surface Feed Direction Insert	Crest Radius (Wiped/finished surface.)  Pre-finished Surface Finished Surface Feed Direction Insert	Crest Radius (Additional turning necessary to finish the thread crest.)  Pre-finished Surface Finished Surface Feed Direction Insert

INFEEED METHODS

	Radial Infeed	Flank Infeed	Modified Flank Infeed	Incremental Infeed
Features	 Radial Infeed	 Flank Infeed	 Modified Flank Infeed	 Incremental Infeed
Advantages	● Easiest to use. (Standard programme for threading) ● Wide application. (Cutting conditions easy to change.) ● Uniform wear of the right and left sides of the cutting edge.	● Relatively easy to use. (Semi-standard programme for threading.) ● Reduced cutting force. ● Suitable for large pitch threads or materials that peel easily. ● Good chip discharge.	● Preventing flank wear on the right side of the cutting edge. ● Reduced cutting force. ● Suitable for large pitch threads or materials that peel easily. ● Good chip discharge.	● Uniform flank wear of the right and left sides of the cutting edge. ● Reduced cutting force. ● Suitable for large pitch threads or materials that peel easily.
Disadvantages	● Difficult chip control. ● Subject to vibration in the later in stages of cutting. ● Ineffective for large pitch threading. ● Heavy load on the corner radius.	● Large flank wear on the right side of the cutting edge. ● Relatively difficult to change cutting depth. (Re-programming necessary)	● Complex machining programming. ● Difficult to change cutting depth. (Re-programming necessary)	● Complex machining programming. ● Difficult to change cutting depth. (Re-programming necessary) ● Difficult chip control.

THREADING METHODS

THREADING DEPTH

Features	
Advantages	Disadvantages
 Fixed cut area ● Easy to use. (Standard programme for threading.) ● Superior resistance to vibration. (Constant cutting force.)	● Long chips generated during the final pass. ● Complex calculation of cutting depth when changing the number of passes.
 Fixed cutting depth ● Reduced load on corner radius during the first half of the passes. ● Easy chip control. (Optional setting of chip thickness) ● Easy to calculate cutting depth when changing the number of passes. ● Good chip control.	● Subject to vibration in the later stages of cutting. (Increased cutting force) ● In some cases, changing the NC programme is necessary.

Note 1) It is recommended to set the depth of cut of the final pass to 0.05mm–0.025mm.
Large cutting depths can cause vibration, leading to a poor surface finish.

■ FORMULAE

● Formulae to calculate infeed for each pass in a reduced series.

$\Delta ap_n = \frac{ap}{\sqrt{n_{ap}-1}} \times \sqrt{b}$ Δap_n : Depth of cut n : Actual pass ap : Total depth of cut n_{ap} : Number of passes b : 1st pass 0.3 2nd pass 2–1 = 1 3rd pass 3–1 = 2 . . nth pass n–1	(Example) External threading (ISO Metric) Pitch : 1.0mm ap : 0.6mm nap : 5 passes 1st Pass $\Delta ap_1 = \frac{0.60}{\sqrt{5-1}} \times \sqrt{0.3} = 0.16 \rightarrow \mathbf{0.16} (\Delta ap_1)$ 2nd Pass $\Delta ap_2 = \frac{0.60}{\sqrt{5-1}} \times \sqrt{2-1} = 0.3 \rightarrow \mathbf{0.14} (\Delta ap_2 - \Delta ap_1)$ 3rd Pass $\Delta ap_3 = \frac{0.60}{\sqrt{5-1}} \times \sqrt{3-1} = 0.42 \rightarrow \mathbf{0.12} (\Delta ap_3 - \Delta ap_2)$ 4th Pass $\Delta ap_4 = \frac{0.60}{\sqrt{5-1}} \times \sqrt{4-1} = 0.52 \rightarrow \mathbf{0.1} (\Delta ap_4 - \Delta ap_3)$ 5th Pass $\Delta ap_5 = \frac{0.60}{\sqrt{5-1}} \times \sqrt{5-1} = 0.6 \rightarrow \mathbf{0.08} (\Delta ap_5 - \Delta ap_4)$
--	---

■ NC PROGRAMME FOR MODIFIED FLANK INFEEED

● Example) M12×1.0 5 passes modified 5°

External Threading	Internal Threading
G00 Z = 5.0 X = 14.0 G92 U–4.34 Z–13.0 F1.0 G00 W–0.07 G92 U–4.64 Z–13.0 F1.0 G00 W–0.06 G92 U–4.88 Z–13.0 F1.0 G00 W–0.05 G92 U–5.08 Z–13.0 F1.0 G00 W–0.03 G92 U–5.20 Z–13.0 F1.0 G00	G00 Z = 5.0 X = 10.0 G92 U4.34 Z–13.0 F1.0 G00 W–0.07 G92 U4.64 Z–13.0 F1.0 G00 W–0.05 G92 U4.84 Z–13.0 F1.0 G00 W–0.04 G92 U5.02 Z–13.0 F1.0 G00 W–0.03 G92 U5.14 Z–13.0 F1.0 G00

SELECTING CUTTING CONDITIONS

		Priority					
		Tool Life	Cutting Force	Surface Finish	Precision of Thread	Chip Discharge	Efficiency (Reduced Passes)
Threading Methods	Radial	○		○	○		○
	Flank	(△ : Modified)	○	(△ : Modified)		○	
Cutting Depth	Fixed Cutting Depth					○	
	Fixed Cut Area	○	○	○	○		○

Note 1) Tool life and surface finish accuracy can be increased by changing the threading method from flank infeed to modified flank infeed.
Chip control can be improved by increasing the cutting depth in the later half of passes.

CUTTING DEPTH AND THE NUMBER OF PASSES

● Selection of the appropriate cutting depth and the right number of passes is vital for threading.

- For most threading, use a "threading cycle programme," which has originally been installed on machines, and specify "total cutting depth" and "cutting depth in the first or final pass."
- Cutting depth and the number of passes are easy to change for the radial infeed method, thus making it easy to determine the appropriate cutting conditions.

How to effectively use MMT series.

- Insert grades with high wear and plastic deformation resistance, specially produced for threading tools, ensure highly efficient cutting by enabling high-speed machining and a reduced number of passes.



Machining Cost Reduction

ADVICE ON IMPROVED THREADING

● Increasing tool life

- To prevent damage to the corner radius -
Recommended method - Modified flank infeed
- To have uniform flank wear on both sides of a cutting edge -
Recommended method - Radial infeed
- To prevent crater wear -
Recommended method - Flank infeed

● Preventing chip problems

- Change to flank or modified infeed.
- During radial infeed cutting, use an inverted holder and change the coolant supply to a downward direction.
- When using the radial infeed method, set the minimum cutting depth at around 0.2mm to make the chips thicker.

● To achieve highly efficient machining

- Increase cutting speed. (Dependant on the maximum revolution and rigidity of the machine.)
- Reduce the number of passes. (Reduce by 30-40%.)
- A reduced number of passes can improve chip discharge because of the thicker chips generated.

● Preventing vibration

- Change to flank or modified infeed.
- When using radial infeed, reduce cutting depth in the later half of passes and lower the cutting speed.

● Increased surface finish accuracy

- A final wiping pass should be performed at the same depth of cut as the last regular pass.
- When using the flank infeed method, change to radial infeed only during the final pass.

THREADING METHODS

Pipe Threads and Tool Selection

Parallel Pipe Thread G(PF)

min	Thread	Number of Threads	Standard Internal Diameter
—	G 1/16	28	6.561
1min	G 1/8		8.556
2min	G 1/4	19	11.445
3min	G 3/8		14.950
4min	G 1/2	14	18.631
5min	G 5/8		20.587
6min	G 3/4		24.117
7min	G 7/8		27.877
8min	G 1	11	30.291
9min	G 1 1/8		34.939
10min	G 1 1/4		38.952

Note 1) Same as PF.

Taper Pipe Thread R, Rc(PT)

min	Thread	Number of Threads	Standard Internal Diameter
—	R 1/16	28	6.561
1min	R 1/8		8.556
2min	R 1/4	19	11.445
3min	R 3/8		14.950
4min	R 1/2	14	18.631
5min	—	—	—
6min	R 3/4	14	24.117
7min	—	—	—
8min	R 1	11	30.291
9min	—	—	—
10min	R 1 1/4	11	38.952

Note 1) Same as Rc, PT.

- Please note that as part of industry practice, pipe screws are sometimes referred to as "minutes" in inch conversion units.
- One "minute" equals 1/8 inch (1 inch= 25.4mm)
- 1 1/4 inches are sometimes referred to as "inch 2 minutes" (1/4= 2/8= 2 minutes).
- The pitch is pre-determined for each nominal diameter. Note the minimum machining diameter especially when internal threading.

MMT SERIES ORDER NUMBER

HOLDERS

EXTERNAL

MMT	E	R	12	12	H	16	-	C
Designation	Application	Hand of Tool	Tool Size (mm) (Height and Width)		Tool Length (mm)	Insert Size (mm)	Method of Holding	
	E External	R Right	12	12	H 100	16 9.525	C Clamp-on	
			16	16	K 125	22 12.7		
			20	20	M 150			
			25	25	P 170			
			32	32				

INTERNAL

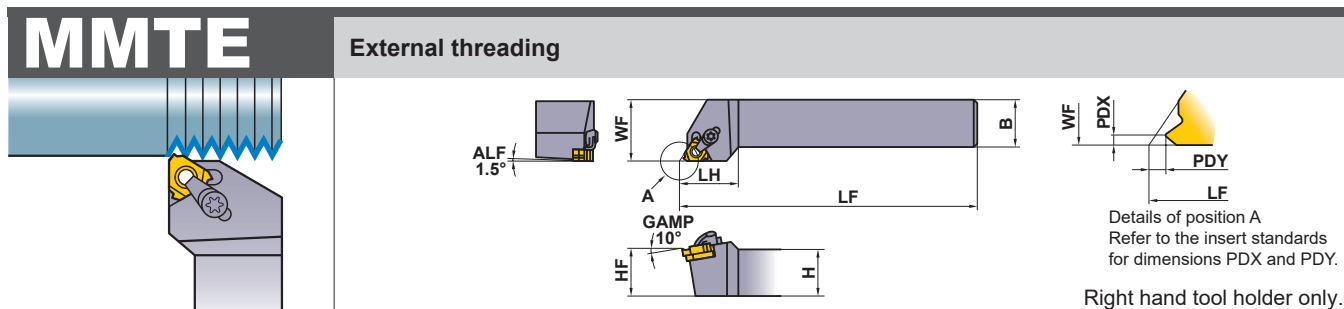
MMT	I	R	13	16	A	K	11	-	S	P15
Designation	Application	Min.Cutting Diameter (mm)	Tool Length (mm)		Insert Size (mm)	Method of Holding		Lead Angle		
	I Internal	Shank Diameter (mm)	K 125	R 200	11 6.35	S Screw-on		P15	1.5°	
		Shank Material	M 150	S 250	16 9.525	C Clamp-on		P25	2.5°	
	Hand of Tool	A Steel Shank with Coolant Hole	Q 180	T 300	22 12.7			P35	3.5°	
	R Right									

INSERTS

M-CLASS									
MMT	16	E	R	100	ISO	- S			
Designation	Diameter of Inscribed Circle (mm)	Application	Hand of Tool	Pitch		Threading Type			
	11 6.35	E External	R Right	100 1.0mm	A 0.5—1.5mm or 48—16 thread/inch	S M-class inserts with 3-D chip breakers			
	16 9.525	I Internal		125 1.25mm	G 1.75—3.0mm or 14—8 thread/inch	60 Partial Profile 60°			
				150 1.5mm	AG 0.5—3.0mm or 48—8 thread/inch	55 Partial Profile 55°			
				175 1.75mm		ISO ISO Metric			
				200 2.0mm		W Whitworth for BSW, BSP			
				250 2.5mm		BSPT BSPT			
				300 3.0mm		UN American UN			

G-CLASS									
MMT	16	E	R	050	ISO				
Designation	Diameter of Inscribed Circle (mm)	Application	Hand of Tool	Pitch		Threading Type			
	11 6.35	E External	R Right	050 0.5mm	A 0.5—1.5mm or 48—16 thread/inch	60 Partial Profile 60°			
	16 9.525	I Internal		075 0.75mm	G 1.75—3.0mm or 14—8 thread/inch	55 Partial Profile 55°			
	22 12.7			100 1.0mm	AG 0.5—3.0mm or 48—8 thread/inch	ISO ISO Metric			
				125 1.25mm		W Whitworth for BSW, BSP			
				150 1.5mm		BSPT BSPT			
				175 1.75mm		UN American UN			
				200 2.0mm		RD Round DIN 405			
				250 2.5mm		TR ISO Trapezoidal 30°			
				300 3.0mm		ACME American ACME			
				350 3.5mm		UNJ UNJ			
				400 4.0mm		APBU API Buttress Casing			
				450 4.5mm		APRD API Round Casing&Tubing			
				500 5.0mm	N 3.5—5.0mm or 7—5 thread/inch	NPT NPT			
						NPTF NPTF			

MMTE_{HOLDER}



Order Number	Stock	Insert Number	Dimensions (mm)							 *		 *		
	R		H	B	LF	LH	HF	WF	Clamp Bridge	Clamp Screw	Stop Ring	Shim Screw	Shim	Wrench
MMTER1212H16-C	●	MMT16ER 	12	12	100	25	12	16	SETK51	SETS51	CR4	HFC03008	CTE32TP15	①TKY15F ②HKY20R
MMTER1616H16-C	●		16	16	100	25	16	20	SETK51	SETS51	CR4	HFC03008	CTE32TP15	①TKY15F ②HKY20R
MMTER2020K16-C	●		20	20	125	26	20	25	SETK51	SETS51	CR4	HFC03008	CTE32TP15	①TKY15F ②HKY20R
MMTER2525M16-C	●		25	25	150	28	25	32	SETK51	SETS51	CR4	HFC03008	CTE32TP15	①TKY15F ②HKY20R
MMTER3232P16-C	●		32	32	170	32	32	40	SETK51	SETS51	CR4	HFC03008	CTE32TP15	①TKY15F ②HKY20R
MMTER2525M22-C	●	MMT22ER 	25	25	150	32	25	32	SETK61	SETS61	CR5	HFC04010	CTE43TP15	①TKY20F ②HKY25R
MMTER3232P22-C	●		32	32	170	32	32	40	SETK61	SETS61	CR5	HFC04010	CTE43TP15	①TKY20F ②HKY25R

Note 1) Select and use a shim as shown below (sold separately), dependant on the lead angle.

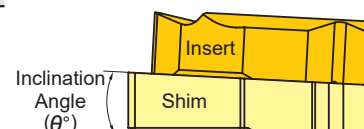
* Clamp Torque (N · m) : SETS51=3.5, SETS61=5.0, HFC03008=1.5, HFC04010=2.2

SHIM

Lead Angle (α°)	Order Number	Stock R	Inclination Angle (θ°)	Applicable Holder
-1.5°	CTE32TN15	●	-3°	MMTER 16-C
-0.5°	CTE32TN05	●	-2°	
0.5°	CTE32TP05	●	-1°	
1.5°	CTE32TP15	●	0°	
2.5°	CTE32TP25	●	1°	
3.5°	CTE32TP35	●	2°	
4.5°	CTE32TP45	●	3°	

Standard shim delivered with the holder.

Lead Angle (α°)	Order Number	Stock R	Inclination Angle (θ°)	Applicable Holder
-1.5°	CTE43TN15	●	-3°	MMTER 22-C
-0.5°	CTE43TN05	●	-2°	
0.5°	CTE43TP05	●	-1°	
1.5°	CTE43TP15	●	0°	
2.5°	CTE43TP25	●	1°	
3.5°	CTE43TP35	●	2°	
4.5°	CTE43TP45	●	3°	









RECOMMENDED CUTTING CONDITIONS

	Workpiece Material	Hardness	Grade	Cutting Speed (m/min)
P	Mild Steel	≤180HB	MP9025	80 (60-100)
			VP10MF	150 (70-230)
			VP15TF	100 (60-140)
			VP20RT	80 (60-100)
	Carbon Steel Alloy Steel	180-280HB	MP9025	80 (60-100)
			VP10MF	140 (80-200)
			VP15TF	100 (60-140)
			VP20RT	80 (60-100)
M	Stainless Steel	≤200HB	MP9025	80 (40-120)
			VP15TF	80 (40-120)
			VP20RT	
K	Gray Cast Iron	Tensile Strength ≤350MPa	VP10MF	140 (80-200)
			VP15TF	90 (60-120)

	Workpiece Material	Hardness	Grade	Cutting Speed (m/min)
S	Heat Resistant Alloy	—	MP9025	30 (20-40)
			VP10MF	45 (15-70)
			VP15TF	
			VP20RT	30 (20-40)
	Titanium Alloy	—	MP9025	45 (25-65)
			VP10MF	60 (40-80)
			VP15TF	
			VP20RT	45 (25-65)
H	Heat-Treated Alloy	45-55HRC	VP10MF	50 (30-70)
			VP15TF	40 (20-60)

MMT M-CLASS INSERTS WITH 3-D CHIP BREAKERS

INSERTS

Type	Order Number	Coated			Pitch		Dimensions (mm)					Total Cutting Depth (mm)	Geometry
		NEW MP9025	VP15TF	VP20RT			IC	S	PDY	PDX	RE		
		mm	thread/inch										
Partial Profile 60°	MMT16ERAG60-S	●	●	●	0.5—3.0	48—8	9.525	3.44	1.2	1.7	0.08	—	Partial form 
	MMT16ERA60-S	●	●	●	0.5—1.5	48—16	9.525	3.44	0.8	0.9	0.06	—	
	MMT16ERG60-S	●	●	●	1.75—3.0	14—8	9.525	3.44	1.2	1.7	0.23	—	
Partial Profile 55°	MMT16ERAG55-S	●	●	●		48—8	9.525	3.44	1.2	1.7	0.07	—	Partial form 
	MMT16ERA55-S	●	●	●		48—16	9.525	3.44	0.8	0.9	0.07	—	
	MMT16ERG55-S	●	●	●		14—8	9.525	3.44	1.2	1.7	0.23	—	
ISO Metric	MMT16ER100ISO-S	●	●	●	1.0		9.525	3.44	0.7	0.7	0.13	0.61	Full form 
	MMT16ER125ISO-S	●	●	●	1.25		9.525	3.44	0.8	0.9	0.16	0.77	
	MMT16ER150ISO-S	●	●	●	1.5		9.525	3.44	0.8	1.0	0.20	0.92	
	MMT16ER175ISO-S	●	●	●	1.75		9.525	3.44	0.9	1.2	0.22	1.07	
	MMT16ER200ISO-S	●	●	●	2.0		9.525	3.44	1.0	1.3	0.26	1.23	
	MMT16ER250ISO-S	●	●	●	2.5		9.525	3.44	1.1	1.5	0.33	1.53	
	MMT16ER300ISO-S	●	●	●	3.0		9.525	3.44	1.2	1.6	0.40	1.84	
American UN	MMT16ER160UN-S	●	●	●		16	9.525	3.44	0.9	1.1	0.23	0.97	Full form 
	MMT16ER140UN-S	●	●	●		14	9.525	3.44	1.0	1.2	0.26	1.11	
	MMT16ER120UN-S	●	●	●		12	9.525	3.44	1.1	1.4	0.30	1.30	
Whitworth for BSW, BSP	MMT16ER190W-S	●	●	●		19	9.525	3.44	0.8	1.0	0.18	0.86	Full form 
	MMT16ER140W-S	●	●	●		14	9.525	3.44	1.0	1.2	0.25	1.16	
	MMT16ER110W-S	●	●	●		11	9.525	3.44	1.1	1.5	0.32	1.48	
BSPT	MMT16ER190BSPT-S	●	●	●		19	9.525	3.44	0.8	0.9	0.18	0.86	Full form 
	MMT16ER140BSPT-S	●	●	●		14	9.525	3.44	1.0	1.2	0.25	1.16	
	MMT16ER110BSPT-S	●	●	●		11	9.525	3.44	1.1	1.5	0.32	1.48	




● = NEW

IDENTIFICATION

MMT	16	E	R	100	ISO	-	S	M-class inserts with 3-D chip breakers
Designation	Diameter of Inscribed Circle (mm)	Application	Hand of Tool	Pitch	Threading Type			
	11 6.35	E External	R Right	100 1.0mm	60 Partial Profile 60°			
	16 9.525	I Internal		125 1.25mm	55 Partial Profile 55°			
				150 1.5mm	ISO ISO Metric			
				175 1.75mm	W Whitworth for BSW, BSP			
				200 2.0mm	BSPT BSPT			
				250 2.5mm	UN American UN			
				300 3.0mm				

MMT G-CLASS GROUND INSERTS




INSERTS

Type	Thread Tolerance	Order Number	Coated		Pitch		Dimensions (mm)					Total Cutting Depth (mm)	Geometry
			VP10MF	VP15TF			IC	S	PDY	PDX	RE		
					mm	thread/inch							
Partial Profile 60°	—	MMT16ERAG60	●		0.5—3.0	48—8	9.525	3.44	1.2	1.7	0.08	—	
		MMT16ERA60	●	●	0.5—1.5	48—16	9.525	3.44	0.8	0.9	0.05	—	
		MMT16ERG60	●	●	1.75—3.0	14—8	9.525	3.44	1.2	1.7	0.27	—	
		MMT22ERN60	●		3.5—5.0	7—5	12.7	4.64	1.7	2.5	0.53	—	
Partial Profile 55°	—	MMT16ERAG55	●			48—8	9.525	3.44	1.2	1.7	0.07	—	
		MMT16ERA55	●	●		48—16	9.525	3.44	0.8	0.9	0.05	—	
		MMT16ERG55	●	●		14—8	9.525	3.44	1.2	1.7	0.21	—	
		MMT22ERN55	●			7—5	12.7	4.64	1.7	2.5	0.44	—	
ISO Metric	6g	MMT16ER050ISO	●		0.5		9.525	3.44	0.6	0.4	0.06	0.31	
		MMT16ER075ISO	●		0.75		9.525	3.44	0.6	0.6	0.10	0.46	
		MMT16ER100ISO	●	●	1.0		9.525	3.44	0.7	0.7	0.16	0.61	
		MMT16ER125ISO	●	●	1.25		9.525	3.44	0.8	0.9	0.19	0.77	
		MMT16ER150ISO	●	●	1.5		9.525	3.44	0.8	1.0	0.23	0.92	
		MMT16ER175ISO	●	●	1.75		9.525	3.44	0.9	1.2	0.21	1.07	
		MMT16ER200ISO	●	●	2.0		9.525	3.44	1.0	1.3	0.31	1.23	
		MMT16ER250ISO	●	●	2.5		9.525	3.44	1.1	1.5	0.32	1.53	
		MMT16ER300ISO	●	●	3.0		9.525	3.44	1.2	1.6	0.46	1.84	
		MMT22ER350ISO	●		3.5		12.7	4.64	1.6	2.3	0.45	2.15	
		MMT22ER400ISO	●		4.0		12.7	4.64	1.6	2.3	0.52	2.45	
		MMT22ER450ISO	●		4.5		12.7	4.64	1.7	2.4	0.58	2.76	
		MMT22ER500ISO	●		5.0		12.7	4.64	1.7	2.5	0.63	3.07	

IDENTIFICATION

MMT	16	E	R	050	ISO
Designation	Diameter of Inscribed Circle (mm)	Application	Hand of Tool	Pitch	Threading Type
	11 6.35	E External	R Right	050 0.5mm	60 Partial Profile 60°
	16 9.525	I Internal		075 0.75mm	55 Partial Profile 55°
	22 12.7			100 1.0mm	ISO ISO Metric
				125 1.25mm	W Whitworth for BSW, BSP
				150 1.5mm	BSPT BSPT
				175 1.75mm	UN American UN
				200 2.0mm	RD Round DIN 405
				250 2.5mm	TR ISO Trapezoidal 30°
				300 3.0mm	ACME American ACME
				350 3.5mm	UNJ UNJ
				400 4.0mm	APBU API Buttress Casing
				450 4.5mm	APRD API Round Casing&Tubing
				500 5.0mm	NPT NPT
					NPTF NPTF

INSERTS

Type	Thread Tolerance	Order Number	Coated		Pitch		Dimensions (mm)					Total Cutting Depth (mm)	Geometry
			VP10MF	VP15TF			IC	S	PDY	PDX	RE		
					mm	thread/inch							
American UN	2A	MMT16ER320UN	●			32	9.525	3.44	0.6	0.6	0.09	0.49	Full form 
		MMT16ER280UN	●			28	9.525	3.44	0.6	0.7	0.10	0.56	
		MMT16ER240UN	●			24	9.525	3.44	0.7	0.8	0.16	0.65	
		MMT16ER200UN	●			20	9.525	3.44	0.8	0.9	0.19	0.78	
		MMT16ER180UN	●			18	9.525	3.44	0.8	1.0	0.21	0.87	
		MMT16ER160UN	●	●		16	9.525	3.44	0.9	1.1	0.24	0.97	
		MMT16ER140UN	●	●		14	9.525	3.44	1.0	1.2	0.22	1.11	
		MMT16ER130UN	●			13	9.525	3.44	1.0	1.3	0.24	1.20	
		MMT16ER120UN	●	●		12	9.525	3.44	1.1	1.4	0.32	1.30	
		MMT16ER110UN	●			11	9.525	3.44	1.1	1.5	0.29	1.42	
		MMT16ER100UN	●			10	9.525	3.44	1.1	1.5	0.32	1.56	
		MMT16ER090UN	●			9	9.525	3.44	1.2	1.7	0.35	1.73	
		MMT16ER080UN	●			8	9.525	3.44	1.2	1.6	0.48	1.95	
		MMT22ER070UN	●			7	12.7	4.64	1.6	2.3	0.47	2.22	
		MMT22ER060UN	●			6	12.7	4.64	1.6	2.3	0.53	2.60	
		MMT22ER050UN	●			5	12.7	4.64	1.7	2.5	0.64	3.12	
Whitworth for BSW, BSP	Medium Class A	MMT16ER280W	●			28	9.525	3.44	0.6	0.7	0.09	0.58	Full form 
		MMT16ER260W	●			26	9.525	3.44	0.7	0.8	0.10	0.63	
		MMT16ER200W	●			20	9.525	3.44	0.8	0.9	0.18	0.81	
		MMT16ER190W	●	●		19	9.525	3.44	0.8	1.0	0.19	0.86	
		MMT16ER180W	●			18	9.525	3.44	0.8	1.0	0.20	0.90	
		MMT16ER160W	●			16	9.525	3.44	0.9	1.1	0.23	1.02	
		MMT16ER140W	●	●		14	9.525	3.44	1.0	1.2	0.26	1.16	
		MMT16ER120W	●			12	9.525	3.44	1.1	1.4	0.30	1.36	
		MMT16ER110W	●	●		11	9.525	3.44	1.1	1.5	0.33	1.48	
		MMT16ER100W	●			10	9.525	3.44	1.1	1.5	0.37	1.63	
		MMT16ER090W	●			9	9.525	3.44	1.2	1.7	0.34	1.81	
		MMT16ER080W	●			8	9.525	3.44	1.2	1.5	0.39	2.03	
		MMT22ER070W	●			7	12.7	4.64	1.6	2.3	0.46	2.32	
		MMT22ER060W	●			6	12.7	4.64	1.6	2.3	0.53	2.71	
		MMT22ER050W	●			5	12.7	4.64	1.7	2.4	0.66	3.25	
		BSPT	Standard BSPT	MMT16ER280BSPT	●			28	9.525	3.44	0.6	0.6	
MMT16ER190BSPT	●			●		19	9.525	3.44	0.8	0.9	0.14	0.86	
MMT16ER140BSPT	●			●		14	9.525	3.44	1.0	1.2	0.26	1.16	
MMT16ER110BSPT	●			●		11	9.525	3.44	1.1	1.5	0.33	1.48	
Round DIN 405	7h	MMT16ER100RD	●			10	9.525	3.44	1.1	1.2	0.60	1.27	Full form 
		MMT16ER080RD	●			8	9.525	3.44	1.4	1.3	0.75	1.59	
		MMT16ER060RD	●			6	9.525	3.44	1.5	1.7	1.00	2.12	
		MMT22ER040RD	●			4	12.7	4.64	2.2	2.3	1.51	3.18	

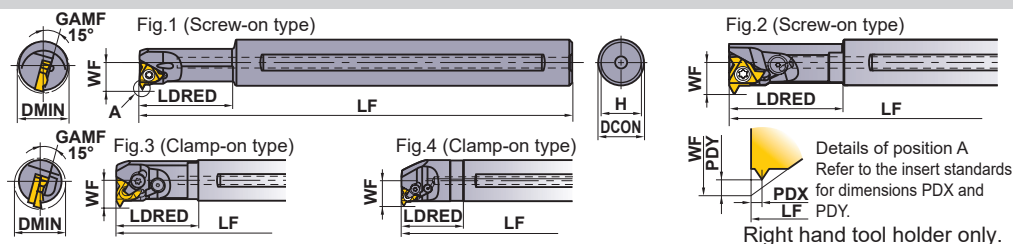
MMT G-CLASS GROUND INSERTS

Type	Thread Tolerance	Order Number	Coated	Pitch		Dimensions (mm)					Total Cutting Depth (mm)	Geometry
			VP10MF	mm	thread/inch	IC	S	PDY	PDX	RE RER/L		
ISO Trapezoidal 30°	7e	MMT16ER150TR	●	1.5		9.525	3.44	1.0	1.1	0.08	0.90	
		MMT16ER200TR	●	2.0		9.525	3.44	1.1	1.3	0.15	1.25	
		MMT16ER300TR	●	3.0		9.525	3.44	1.3	1.5	0.15	1.75	
		MMT22ER400TR	●	4.0		12.7	4.64	1.7	1.9	0.15	2.25	
		MMT22ER500TR	●	5.0		12.7	4.64	2.1	2.5	0.15	2.75	
American ACME	3G	MMT16ER120ACME	●		12	9.525	3.44	1.1	1.2	0.08	1.19	
		MMT16ER100ACME	●		10	9.525	3.44	1.3	1.4	0.08	1.52	
		MMT16ER080ACME	●		8	9.525	3.44	1.4	1.5	0.10	1.84	
		MMT22ER060ACME	●		6	12.7	4.64	1.8	2.1	0.10	2.37	
		MMT22ER050ACME	●		5	12.7	4.64	2.0	2.3	0.10	2.79	
UNJ	3A	MMT16ER320UNJ	●		32	9.525	3.44	0.6	0.7	0.13	0.46	
		MMT16ER280UNJ	●		28	9.525	3.44	0.7	0.7	0.14	0.52	
		MMT16ER240UNJ	●		24	9.525	3.44	0.7	0.8	0.17	0.61	
		MMT16ER200UNJ	●		20	9.525	3.44	0.8	0.9	0.20	0.73	
		MMT16ER180UNJ	●		18	9.525	3.44	0.8	1.0	0.22	0.81	
		MMT16ER160UNJ	●		16	9.525	3.44	0.9	1.1	0.25	0.92	
		MMT16ER140UNJ	●		14	9.525	3.44	1.0	1.2	0.29	1.05	
		MMT16ER120UNJ	●		12	9.525	3.44	1.1	1.3	0.33	1.22	
		MMT16ER100UNJ	●		10	9.525	3.44	1.2	1.5	0.40	1.47	
		MMT16ER080UNJ	●		8	9.525	3.44	1.2	1.6	0.51	1.83	
API Buttress Casing	Standard API	MMT22ER050APBU	●		5	12.7	4.64	3.1	1.9	0.74/0.18	1.55	
API Round Casing & Tubing	Standard API RD	MMT16ER100APRD	●		10	9.525	3.44	1.2	1.4	0.34	1.41	
		MMT16ER080APRD	●		8	9.525	3.44	1.3	1.5	0.41	1.81	
American NPT	Standard NPT	MMT16ER270NPT	●		27	9.525	3.44	0.7	0.8	0.04	0.66	
		MMT16ER180NPT	●		18	9.525	3.44	0.8	1.0	0.08	1.01	
		MMT16ER140NPT	●		14	9.525	3.44	0.9	1.2	0.09	1.33	
		MMT16ER115NPT	●		11.5	9.525	3.44	1.1	1.5	0.11	1.64	
		MMT16ER080NPT	●		8	9.525	3.44	1.3	1.8	0.14	2.42	
American NPTF	Class 2	MMT16ER270NPTF	●		27	9.525	3.44	0.7	0.8	0.04	0.64	
		MMT16ER180NPTF	●		18	9.525	3.44	0.8	1.0	0.04	1.00	
		MMT16ER140NPTF	●		14	9.525	3.44	0.9	1.2	0.04	1.35	
		MMT16ER115NPTF	●		11.5	9.525	3.44	1.1	1.5	0.04	1.63	
		MMT16ER080NPTF	●		8	9.525	3.44	1.3	1.8	0.04	2.38	

MMTI TYPE BORING BARS

MMTI

Internal threading



Order Number	Stock R	Insert Number	Lead Angle	Dimensions (mm)						Clamp Bridge	Clamp Screw	Stop Ring	① Shim Screw ② Embedded Shim Screw	Shim	Wrench	Fig
				DCON	LF	LDRED	WF	H	DMIN							
MMTIR1316AK11-SP15	●	MMT11IR	1.5°	16	125	25	8.7	15	13	—	TS25	—	—	—	①TKY08F	1
MMTIR1316AK11-SP25	●		2.5°	16	125	25	8.7	15	13	—	TS25	—	—	—	①TKY08F	1
MMTIR1316AK11-SP35	●		3.5°	16	125	25	8.7	15	13	—	TS25	—	—	—	①TKY08F	1
MMTIR1516AM11-SP15	●		1.5°	16	150	32	9.7	15	15	—	TS25	—	—	—	①TKY08F	1
MMTIR1516AM11-SP25	●		2.5°	16	150	32	9.7	15	15	—	TS25	—	—	—	①TKY08F	1
MMTIR1516AM11-SP35	●		3.5°	16	150	32	9.7	15	15	—	TS25	—	—	—	①TKY08F	1
MMTIR1916AM16-SP15	●	MMT16IR	1.5°	16	150	40	12.2	15	19	—	CS350860T	—	—	—	①TKY15F	2
MMTIR1916AM16-SP25	●		2.5°	16	150	40	12.2	15	19	—	CS350860T	—	—	—	①TKY15F	2
MMTIR1916AM16-SP35	●		3.5°	16	150	40	12.2	15	19	—	CS350860T	—	—	—	①TKY15F	2
MMTIR2420AQ16-C	●		1.5°	20	180	40	14.2	19	24	SETK51	SETS51	CR4	①HFC03006 ②TFS03006	CTI32TP15	①TKY15F ②HKY20R	3
MMTIR2925AS16-C	●		1.5°	25	250	60	16.7	23.4	29	SETK51	SETS51	CR4	①HFC03006 ②TFS03006	CTI32TP15	①TKY15F ②HKY20R	3
MMTIR3732AS16-C	●		1.5°	32	250	48	20.5	30.4	37	SETK51	SETS51	CR4	①HFC03006 ②TFS03006	CTI32TP15	①TKY15F ②HKY20R	4
MMTIR2420AQ22-SP15	●	MMT22IR	1.5°	20	180	50	15.5	19	24	—	TS43	—	—	—	①TKY15F	2
MMTIR2420AQ22-SP25	●		2.5°	20	180	50	15.5	19	24	—	TS43	—	—	—	①TKY15F	2
MMTIR2420AQ22-SP35	●		3.5°	20	180	50	15.5	19	24	—	TS43	—	—	—	①TKY15F	2
MMTIR3025AR22-C	●		1.5°	25	200	38	17.8	23.4	30	SETK61	SETS61	CR5	①HFC04008 ②TFS03006	CTI43TP15	①TKY20F ②HKY25R	4
MMTIR3832AS22-C	●		1.5°	32	250	48	21.8	30.4	38	SETK61	SETS61	CR5	①HFC04008 ②TFS03006	CTI43TP15	①TKY20F ②HKY25R	4
MMTIR4640AT22-C	●		1.5°	40	300	60	26.2	38	46	SETK61	SETS61	CR5	①HFC04008 ②TFS03006	CTI43TP15	①TKY20F ②HKY25R	4

Note 1) Select and use a shim as shown below (sold separately), dependant on the lead angle.

- A screw-on tool holder uses no shim. (The holder body has a lead angle.) Use a tool holder with the appropriate lead angle.
- Min. cutting diameter (DMIN) shows the internal hole diameter, not the thread diameter.

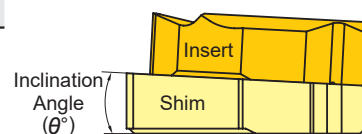
★ Clamp Torque (N · m) : TS25=1.0, CS350860T=3.5, SETS51=3.5, TS43=3.5, SETS61=5.0, HFC03006=1.5, HFC04008=2.2

SHIM

Lead Angle (α°)	Order Number	Stock R	Inclination Angle (θ°)	Applicable Holder
-1.5°	CTI32TN15	●	-3°	MMTIR ○○○○ ○○16-C
-0.5°	CTI32TN05	●	-2°	
0.5°	CTI32TP05	●	-1°	
1.5°	CTI32TP15	●	0°	
2.5°	CTI32TP25	●	1°	
3.5°	CTI32TP35	●	2°	
4.5°	CTI32TP45	●	3°	

Lead Angle (α°)	Order Number	Stock R	Inclination Angle (θ°)	Applicable Holder
-1.5°	CTI43TN15	●	-3°	MMTIR ○○○○ ○○22-C
-0.5°	CTI43TN05	●	-2°	
0.5°	CTI43TP05	●	-1°	
1.5°	CTI43TP15	●	0°	
2.5°	CTI43TP25	●	1°	
3.5°	CTI43TP35	●	2°	
4.5°	CTI43TP45	●	3°	

Standard shim delivered with the holder.



RECOMMENDED CUTTING CONDITIONS

Workpiece Material	Hardness	Grade	Cutting Speed (m/min)
P	Mild Steel	MP9025	80 (60—100)
		VP10MF	150 (70—230)
		VP15TF	100 (60—140)
		VP20RT	80 (60—100)
	Carbon Steel Alloy Steel	MP9025	80 (60—100)
		VP10MF	140 (80—200)
M	Stainless Steel	VP15TF	100 (60—140)
		VP20RT	80 (60—100)
		MP9025	80 (40—120)
		VP15TF	80 (40—120)
K	Gray Cast Iron	VP10MF	140 (80—200)
		VP15TF	90 (60—120)

Workpiece Material	Hardness	Grade	Cutting Speed (m/min)
S	Heat Resistant Alloy	MP9025	30 (20—40)
		VP10MF	45 (15—70)
		VP15TF	30 (20—40)
		VP20RT	30 (20—40)
H	Titanium Alloy	MP9025	45 (25—65)
		VP10MF	60 (40—80)
		VP15TF	45 (25—65)
		VP20RT	45 (25—65)
H	Heat-Treated Alloy	VP10MF	50 (30—70)
		VP15TF	40 (20—60)

HOW TO SELECT A SHIM ➤ P.23

MMT SERIES ORDER NUMBER ➤ P.12

MMT M-CLASS INSERTS WITH 3-D CHIP BREAKERS

INSERTS

Type	Order Number	Coated			Pitch		Dimensions (mm)					Total Cutting Depth (mm)	Geometry
		NEW MP9025	VP15TF	VP20RT			IC	S	PDY	PDX	RE		
		mm	thread/inch										
Partial Profile 60°	MMT11IRA60-S	●	●	●	0.5—1.5	48—16	6.35	3.04	0.8	0.9	0.03	—	Partial form PNA 60°
	MMT16IRAG60-S	●	●	●	0.5—3.0	48—8	9.525	3.44	1.2	1.7	0.05	—	
	MMT16IRA60-S	●	●	●	0.5—1.5	48—16	9.525	3.44	0.8	0.9	0.03	—	
	MMT16IRG60-S	●	●	●	1.75—3.0	14—8	9.525	3.44	1.2	1.7	0.11	—	
Partial Profile 55°	MMT11IRA55-S	●	●	●		48—16	6.35	3.04	0.8	0.9	0.07	—	Partial form PNA 55°
	MMT16IRAG55-S	●	●	●		48—8	9.525	3.44	1.2	1.7	0.07	—	
	MMT16IRA55-S	●	●	●		48—16	9.525	3.44	0.8	0.9	0.07	—	
	MMT16IRG55-S	●	●	●		14—8	9.525	3.44	1.2	1.7	0.21	—	
ISO Metric	MMT11IR100ISO-S	●	●	●	1.0		6.35	3.04	0.6	0.7	0.06	0.58	Full form PNA 60°
	MMT11IR125ISO-S	●	●	●	1.25		6.35	3.04	0.8	0.9	0.08	0.72	
	MMT11IR150ISO-S	●	●	●	1.5		6.35	3.04	0.8	1.0	0.10	0.87	
	MMT16IR100ISO-S	●	●	●	1.0		9.525	3.44	0.6	0.7	0.06	0.58	
	MMT16IR125ISO-S	●	●	●	1.25		9.525	3.44	0.8	0.9	0.08	0.72	
	MMT16IR150ISO-S	●	●	●	1.5		9.525	3.44	0.8	1.0	0.10	0.87	
	MMT16IR175ISO-S	●	●	●	1.75		9.525	3.44	0.9	1.2	0.11	1.01	
	MMT16IR200ISO-S	●	●	●	2.0		9.525	3.44	1.0	1.3	0.13	1.15	
	MMT16IR250ISO-S	●	●	●	2.5		9.525	3.44	1.1	1.5	0.17	1.44	
	MMT16IR300ISO-S	●	●	●	3.0		9.525	3.44	1.1	1.5	0.20	1.73	
American UN	MMT16IR160UN-S	●	●	●		16	9.525	3.44	0.9	1.1	0.11	0.92	Full form PNA 60°
	MMT16IR140UN-S	●	●	●		14	9.525	3.44	0.9	1.2	0.12	1.05	
	MMT16IR120UN-S	●	●	●		12	9.525	3.44	1.1	1.4	0.14	1.22	
Whitworth for BSW, BSP	MMT16IR190W-S	●	●	●		19	9.525	3.44	0.8	1.0	0.18	0.86	Full form PNA 55°
	MMT16IR140W-S	●	●	●		14	9.525	3.44	1.0	1.2	0.25	1.16	
	MMT16IR110W-S	●	●	●		11	9.525	3.44	1.1	1.5	0.32	1.48	
BSPT	MMT16IR190BSPT-S	●	●	●		19	9.525	3.44	0.8	0.9	0.18	0.86	Full form PNA 55°
	MMT16IR140BSPT-S	●	●	●		14	9.525	3.44	1.0	1.2	0.25	1.16	
	MMT16IR110BSPT-S	●	●	●		11	9.525	3.44	1.1	1.5	0.32	1.48	




● = NEW

IDENTIFICATION

MMT	16	I	R	100	ISO	-	S	M-class inserts with 3-D chip breakers
Designation	Diameter of Inscribed Circle (mm)	Application	Hand of Tool	Pitch	Threading Type			
	11 6.35	E External	R Right	100 1.0mm	60 Partial Profile 60°			
	16 9.525	I Internal		125 1.25mm	55 Partial Profile 55°			
				150 1.5mm	ISO ISO Metric			
				175 1.75mm	W Whitworth for BSW, BSP			
				200 2.0mm	BSPT BSPT			
				250 2.5mm	UN American UN			
				300 3.0mm				

MMT G-CLASS GROUND INSERTS

INSERTS

Type	Thread Tolerance	Order Number	Coated		Pitch		Dimensions (mm)					Total Cutting Depth (mm)	Geometry
			VP10MF	VP15TF			IC	S	PDY	PDX	RE		
					mm	thread/inch							
Partial Profile 60°	—	MMT11IRA60	●	●	0.5—1.5	48—16	6.35	3.04	0.8	0.9	0.05	—	
		MMT16IRAG60	●	●	0.5—3.0	48—8	9.525	3.44	1.2	1.7	0.05	—	
		MMT16IRA60	●	●	0.5—1.5	48—16	9.525	3.44	0.8	0.9	0.05	—	
		MMT16IRG60	●	●	1.75—3.0	14—8	9.525	3.44	1.2	1.7	0.16	—	
		MMT22IRN60	●	●	3.5—5.0	7—5	12.7	4.64	1.7	2.5	0.30	—	
Partial Profile 55°	—	MMT11IRA55	●	●		48—16	6.35	3.04	0.8	0.9	0.05	—	
		MMT16IRAG55	●	●		48—8	9.525	3.44	1.2	1.7	0.07	—	
		MMT16IRA55	●	●		48—16	9.525	3.44	0.8	0.9	0.05	—	
		MMT16IRG55	●	●		14—8	9.525	3.44	1.2	1.7	0.21	—	
		MMT22IRN55	●	●		7—5	12.7	4.64	1.7	2.5	0.44	—	
ISO Metric	6H	MMT11IR050ISO	●	●	0.5		6.35	3.04	0.6	0.4	0.03	0.29	
		MMT11IR075ISO	●	●	0.75		6.35	3.04	0.6	0.6	0.04	0.43	
		MMT11IR100ISO	●	●	1.0		6.35	3.04	0.6	0.7	0.10	0.58	
		MMT11IR125ISO	●	●	1.25		6.35	3.04	0.8	0.9	0.12	0.72	
		MMT11IR150ISO	●	●	1.5		6.35	3.04	0.8	1.0	0.14	0.87	
		MMT11IR175ISO	●	●	1.75		6.35	3.04	0.9	1.1	0.10	1.01	
		MMT11IR200ISO	●	●	2.0		6.35	3.04	0.9	1.1	0.18	1.15	
		MMT16IR050ISO	●	●	0.5		9.525	3.44	0.6	0.4	0.03	0.29	
		MMT16IR075ISO	●	●	0.75		9.525	3.44	0.6	0.6	0.04	0.43	
		MMT16IR100ISO	●	●	1.0		9.525	3.44	0.6	0.7	0.10	0.58	
		MMT16IR125ISO	●	●	1.25		9.525	3.44	0.8	0.9	0.12	0.72	
		MMT16IR150ISO	●	●	1.5		9.525	3.44	0.8	1.0	0.14	0.87	
		MMT16IR175ISO	●	●	1.75		9.525	3.44	0.9	1.2	0.10	1.01	
		MMT16IR200ISO	●	●	2.0		9.525	3.44	1.0	1.3	0.18	1.15	
		MMT16IR250ISO	●	●	2.5		9.525	3.44	1.1	1.5	0.15	1.44	
		MMT16IR300ISO	●	●	3.0		9.525	3.44	1.1	1.5	0.26	1.73	
		MMT22IR350ISO	●	●	3.5		12.7	4.64	1.6	2.3	0.22	2.02	
		MMT22IR400ISO	●	●	4.0		12.7	4.64	1.6	2.3	0.25	2.31	
		MMT22IR450ISO	●	●	4.5		12.7	4.64	1.6	2.3	0.28	2.60	
		MMT22IR500ISO	●	●	5.0		12.7	4.64	1.6	2.3	0.32	2.89	

IDENTIFICATION





The diagram illustrates the components of the MMT 16 I R 050 ISO designation:







- Designation:** MMT
- Diameter of Inscribed Circle (mm):** 16
- Application:** I
- Hand of Tool:** R (Right)
- Pitch:** 050
- Threading Type:** ISO

● : Inventory maintained in Japan.
(Contains 5 inserts per case.)

MMT G-CLASS GROUND INSERTS

INSERTS

Type	Thread Tolerance	Order Number	Coated		Pitch		Dimensions (mm)					Total Cutting Depth (mm)	Geometry
			VP10MF	VP15TF			IC	S	PDY	PDX	RE		
					mm	thread/inch							
American UN	2B	MMT11IR320UN	●			32	6.35	3.04	0.6	0.6	0.04	0.46	Full form 
		MMT11IR280UN	●			28	6.35	3.04	0.6	0.7	0.05	0.52	
		MMT11IR240UN	●			24	6.35	3.04	0.7	0.8	0.09	0.61	
		MMT11IR200UN	●			20	6.35	3.04	0.8	0.9	0.11	0.73	
		MMT11IR180UN	●			18	6.35	3.04	0.8	1.0	0.12	0.81	
		MMT11IR160UN	●			16	6.35	3.04	0.9	1.1	0.14	0.92	
		MMT11IR140UN	●			14	6.35	3.04	0.9	1.1	0.11	1.05	
		MMT16IR320UN	●			32	9.525	3.44	0.6	0.6	0.04	0.46	
		MMT16IR280UN	●			28	9.525	3.44	0.6	0.7	0.05	0.52	
		MMT16IR240UN	●			24	9.525	3.44	0.7	0.8	0.09	0.61	
		MMT16IR200UN	●			20	9.525	3.44	0.8	0.9	0.11	0.73	
		MMT16IR180UN	●			18	9.525	3.44	0.8	1.0	0.12	0.81	
		MMT16IR160UN	●	●		16	9.525	3.44	0.9	1.1	0.14	0.92	
		MMT16IR140UN	●	●		14	9.525	3.44	0.9	1.2	0.11	1.05	
		MMT16IR130UN	●			13	9.525	3.44	1.0	1.3	0.10	1.13	
		MMT16IR120UN	●	●		12	9.525	3.44	1.1	1.4	0.18	1.22	
		MMT16IR110UN	●			11	9.525	3.44	1.1	1.5	0.13	1.33	
		MMT16IR100UN	●			10	9.525	3.44	1.1	1.5	0.15	1.47	
		MMT16IR090UN	●			9	9.525	3.44	1.2	1.7	0.17	1.63	
		MMT16IR080UN	●			8	9.525	3.44	1.1	1.5	0.27	1.83	
		MMT22IR070UN	●			7	12.7	4.64	1.6	2.3	0.23	2.09	
		MMT22IR060UN	●			6	12.7	4.64	1.6	2.3	0.26	2.44	
		MMT22IR050UN	●			5	12.7	4.64	1.6	2.3	0.32	2.93	
Whitworth for BSW, BSP	Medium Class A	MMT11IR190W	●			19	6.35	3.04	0.8	1.0	0.19	0.86	Full form 
		MMT11IR140W	●			14	6.35	3.04	0.9	1.1	0.26	1.16	
		MMT16IR280W	●			28	9.525	3.44	0.6	0.7	0.09	0.58	
		MMT16IR260W	●			26	9.525	3.44	0.7	0.8	0.10	0.63	
		MMT16IR200W	●			20	9.525	3.44	0.8	0.9	0.18	0.81	
		MMT16IR190W	●	●		19	9.525	3.44	0.8	1.0	0.19	0.86	
		MMT16IR180W	●			18	9.525	3.44	0.8	1.0	0.20	0.90	
		MMT16IR160W	●			16	9.525	3.44	0.9	1.1	0.23	1.02	
		MMT16IR140W	●	●		14	9.525	3.44	1.0	1.2	0.26	1.16	
		MMT16IR120W	●			12	9.525	3.44	1.1	1.4	0.30	1.36	
		MMT16IR110W	●	●		11	9.525	3.44	1.1	1.5	0.33	1.48	
		MMT16IR100W	●			10	9.525	3.44	1.1	1.5	0.37	1.63	
		MMT16IR090W	●			9	9.525	3.44	1.2	1.7	0.34	1.81	
		MMT16IR080W	●			8	9.525	3.44	1.2	1.5	0.39	2.03	
		MMT22IR070W	●			7	12.7	4.64	1.6	2.3	0.46	2.32	
		MMT22IR060W	●			6	12.7	4.64	1.6	2.3	0.53	2.71	
		MMT22IR050W	●			5	12.7	4.64	1.7	2.4	0.66	3.25	
BSPT	Standard BSPT	MMT11IR190BSPT	●			19	6.35	3.04	0.8	0.9	0.14	0.86	Full form 
		MMT11IR140BSPT	●			14	6.35	3.04	0.9	1.0	0.26	1.16	
		MMT16IR190BSPT	●	●		19	9.525	3.44	0.8	0.9	0.14	0.86	
		MMT16IR140BSPT	●	●		14	9.525	3.44	1.0	1.2	0.26	1.16	
		MMT16IR110BSPT	●	●		11	9.525	3.44	1.1	1.5	0.33	1.48	
Round DIN 405	7H	MMT16IR100RD	●			10	9.525	3.44	1.1	1.2	0.55	1.27	Full form 
		MMT16IR080RD	●			8	9.525	3.44	1.4	1.4	0.70	1.59	
		MMT16IR060RD	●			6	9.525	3.44	1.4	1.5	0.93	2.12	
		MMT22IR040RD	●			4	12.7	4.64	2.2	2.3	1.40	3.18	

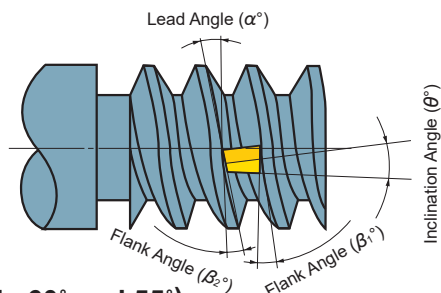
Type	Thread Tolerance	Order Number	Coated	Pitch		Dimensions (mm)					Total Cutting Depth (mm)	Geometry
			VP10MF			IC	S	PDY	PDX	RE RER/L		
				mm	thread/inch							
ISO Trapezoidal 30°	7H	MMT16IR150TR	●	1.5		9.525	3.44	1.0	1.1	0.08	0.90	Semi-full form 
		MMT16IR200TR	●	2.0		9.525	3.44	1.1	1.3	0.15	1.25	
		MMT16IR300TR	●	3.0		9.525	3.44	1.3	1.5	0.15	1.75	
		MMT22IR400TR	●	4.0		12.7	4.64	1.7	1.9	0.15	2.25	
		MMT22IR500TR	●	5.0		12.7	4.64	2.1	2.5	0.15	2.75	
American ACME	3G	MMT16IR120ACME	●		12	9.525	3.44	1.2	1.3	0.05	1.19	Semi-full form 
		MMT16IR100ACME	●		10	9.525	3.44	1.2	1.3	0.08	1.52	
		MMT16IR080ACME	●		8	9.525	3.44	1.4	1.5	0.10	1.84	
		MMT22IR060ACME	●		6	12.7	4.64	1.8	2.1	0.10	2.37	
		MMT22IR050ACME	●		5	12.7	4.64	2.0	2.3	0.10	2.79	
UNJ												
	When machining an internal UNJ thread, cut an internal hole with the appropriate diameter. Then machine with 60° American UN. In this case, a full form type insert cannot be used.											
API Buttress Casing	Standard API	MMT22IR050APBU	●		5	12.7	4.64	2.8	1.9	0.74/0.18	1.55	Full form 
API Round Casing&Tubing	Standard API RD	MMT16IR100APRD	●		10	9.525	3.44	1.2	1.4	0.34	1.41	Full form 
		MMT16IR080APRD	●		8	9.525	3.44	1.3	1.5	0.41	1.81	
American NPT	Standard NPT	MMT16IR270NPT	●		27	9.525	3.44	0.7	0.8	0.04	0.66	Full form 
		MMT16IR180NPT	●		18	9.525	3.44	0.8	1.0	0.08	1.01	
		MMT16IR140NPT	●		14	9.525	3.44	0.9	1.2	0.09	1.33	
		MMT16IR115NPT	●		11.5	9.525	3.44	1.1	1.5	0.11	1.64	
		MMT16IR080NPT	●		8	9.525	3.44	1.3	1.8	0.14	2.42	
American NPTF	Class 2	MMT16IR140NPTF	●		14	9.525	3.44	0.9	1.2	0.04	1.35	Full form 
		MMT16IR115NPTF	●		11.5	9.525	3.44	1.1	1.5	0.04	1.63	
		MMT16IR080NPTF	●		8	9.525	3.44	1.3	1.8	0.04	2.38	

CUTTING CONDITIONS OF MMT SERIES

SELECTING A SHIM FOR THE MMT SERIES

FLANK ANGLE AND LEAD ANGLE

Lead angle (α) depends on a combination of thread diameter and pitch. Select a shim so that the lead angle of the thread can coincide with the flank angles of the thread and insert (β_1, β_2). No need to change a shim for general threading with an MMT holder. When threading with a small diameter or large pitch, change the shim depending on the lead angle, referring to the table and graph below. When threading left hand threads, change to a shim with a negative inclination angle.



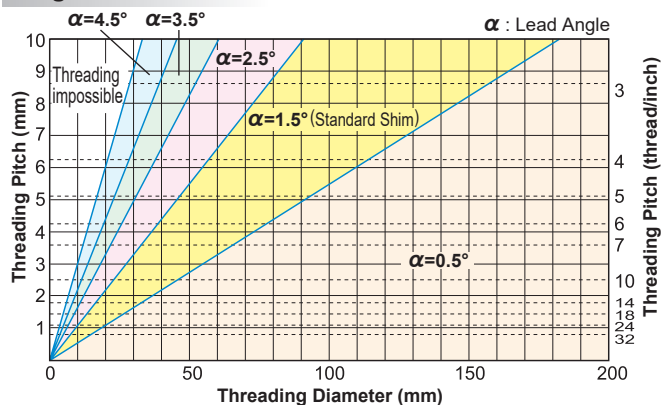
SHIM REFERENCE TABLE (THREADING DIAMETER) (Thread angle 60° and 55°)

Lead Angle Pitch (mm)	Threading impossible	Right Hand Thread (mm)					Left Hand Thread (mm) *		
		4.5°	3.5°	2.5°	1.5°	0.5°	Threading impossible	-1.5°	-0.5°
0.5	$\leq \phi 1.7$	$\phi 1.7 - \phi 2.3$	$\phi 2.3 - \phi 3.0$	$\phi 3.0 - \phi 4.6$	$\phi 4.6 - \phi 9.1$	$\geq \phi 9.1$	$\leq \phi 3.6$	$\phi 3.6 - \phi 9.1$	$\geq \phi 9.1$
0.75	$\leq \phi 2.5$	$\phi 2.5 - \phi 3.4$	$\phi 3.4 - \phi 4.6$	$\phi 4.6 - \phi 6.8$	$\phi 6.8 - \phi 13.7$	$\geq \phi 13.7$	$\leq \phi 5.5$	$\phi 5.5 - \phi 13.7$	$\geq \phi 13.7$
1	$\leq \phi 3.3$	$\phi 3.3 - \phi 4.6$	$\phi 4.6 - \phi 6.1$	$\phi 6.1 - \phi 9.1$	$\phi 9.1 - \phi 18.2$	$\geq \phi 18.2$	$\leq \phi 7.3$	$\phi 7.3 - \phi 18.2$	$\geq \phi 18.2$
1.25	$\leq \phi 4.1$	$\phi 4.1 - \phi 5.7$	$\phi 5.7 - \phi 7.6$	$\phi 7.6 - \phi 11.4$	$\phi 11.4 - \phi 22.8$	$\geq \phi 22.8$	$\leq \phi 9.1$	$\phi 9.1 - \phi 22.8$	$\geq \phi 22.8$
1.5	$\leq \phi 5.0$	$\phi 5.0 - \phi 6.8$	$\phi 6.8 - \phi 9.1$	$\phi 9.1 - \phi 13.7$	$\phi 13.7 - \phi 27.4$	$\geq \phi 27.4$	$\leq \phi 10.9$	$\phi 10.9 - \phi 27.4$	$\geq \phi 27.4$
1.75	$\leq \phi 5.8$	$\phi 5.8 - \phi 8.0$	$\phi 8.0 - \phi 10.6$	$\phi 10.6 - \phi 16.0$	$\phi 16.0 - \phi 31.9$	$\geq \phi 31.9$	$\leq \phi 12.8$	$\phi 12.8 - \phi 31.9$	$\geq \phi 31.9$
2	$\leq \phi 6.6$	$\phi 6.6 - \phi 9.1$	$\phi 9.1 - \phi 12.1$	$\phi 12.1 - \phi 18.2$	$\phi 18.2 - \phi 36.5$	$\geq \phi 36.5$	$\leq \phi 14.6$	$\phi 14.6 - \phi 36.5$	$\geq \phi 36.5$
2.5	$\leq \phi 8.3$	$\phi 8.3 - \phi 11.4$	$\phi 11.4 - \phi 15.2$	$\phi 15.2 - \phi 22.8$	$\phi 22.8 - \phi 45.6$	$\geq \phi 45.6$	$\leq \phi 18.2$	$\phi 18.2 - \phi 45.6$	$\geq \phi 45.6$
3	$\leq \phi 9.9$	$\phi 9.9 - \phi 13.7$	$\phi 13.7 - \phi 18.2$	$\phi 18.2 - \phi 27.3$	$\phi 27.3 - \phi 54.7$	$\geq \phi 54.7$	$\leq \phi 21.9$	$\phi 21.9 - \phi 54.7$	$\geq \phi 54.7$
3.5	$\leq \phi 11.6$	$\phi 11.6 - \phi 15.9$	$\phi 15.9 - \phi 21.3$	$\phi 21.3 - \phi 31.9$	$\phi 31.9 - \phi 63.8$	$\geq \phi 63.8$	$\leq \phi 25.5$	$\phi 25.5 - \phi 63.8$	$\geq \phi 63.8$
4	$\leq \phi 13.2$	$\phi 13.2 - \phi 18.2$	$\phi 18.2 - \phi 24.3$	$\phi 24.3 - \phi 36.5$	$\phi 36.5 - \phi 72.9$	$\geq \phi 72.9$	$\leq \phi 29.2$	$\phi 29.2 - \phi 72.9$	$\geq \phi 72.9$
4.5	$\leq \phi 14.9$	$\phi 14.9 - \phi 20.5$	$\phi 20.5 - \phi 27.3$	$\phi 27.3 - \phi 41.0$	$\phi 41.0 - \phi 82.1$	$\geq \phi 82.1$	$\leq \phi 32.8$	$\phi 32.8 - \phi 82.1$	$\geq \phi 82.1$
5	$\leq \phi 16.5$	$\phi 16.5 - \phi 22.8$	$\phi 22.8 - \phi 30.4$	$\phi 30.4 - \phi 45.6$	$\phi 45.6 - \phi 91.2$	$\geq \phi 91.2$	$\leq \phi 36.5$	$\phi 36.5 - \phi 91.2$	$\geq \phi 91.2$

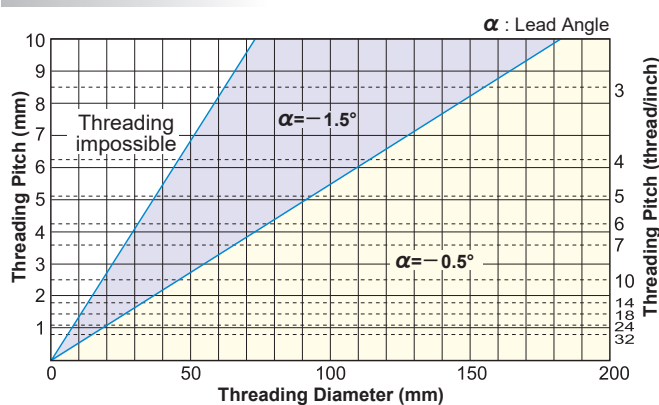
* Back turning in the case of left hand threads.

SHIM REFERENCE GRAPH (Thread angle 60° and 55°)

Right Hand Thread



Left Hand Thread



Note 1) When a thread lead angle $\leq$ the tool flank angle, change the shim to prevent side interference with the insert.
(Refer to the table on page G013 for the calculation of thread lead angle and tool flank angle.)

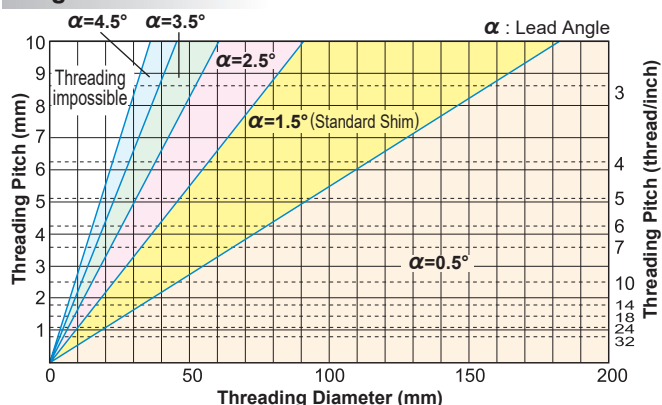
SHIM REFERENCE TABLE (THREADING DIAMETER) (Thread angle 30° and 29°)

Lead Angle Pitch (mm)	Threading impossible	Right Hand Thread (mm)					Left Hand Thread (mm) *		
		4.5°	3.5°	2.5°	1.5°	0.5°	Threading impossible	-1.5°	-0.5°
0.5	$\leq \phi 1.8$	$\phi 1.8 - \phi 2.3$	$\phi 2.3 - \phi 3.0$	$\phi 3.0 - \phi 4.6$	$\phi 4.6 - \phi 9.1$	$\geq \phi 9.1$	$\leq \phi 4.6$	$\phi 4.6 - \phi 9.1$	$\geq \phi 9.1$
0.75	$\leq \phi 2.7$	$\phi 2.7 - \phi 3.4$	$\phi 3.4 - \phi 4.6$	$\phi 4.6 - \phi 6.8$	$\phi 6.8 - \phi 13.7$	$\geq \phi 13.7$	$\leq \phi 6.8$	$\phi 6.8 - \phi 13.7$	$\geq \phi 13.7$
1	$\leq \phi 3.6$	$\phi 3.6 - \phi 4.6$	$\phi 4.6 - \phi 6.1$	$\phi 6.1 - \phi 9.1$	$\phi 9.1 - \phi 18.2$	$\geq \phi 18.2$	$\leq \phi 9.1$	$\phi 9.1 - \phi 18.2$	$\geq \phi 18.2$
1.25	$\leq \phi 4.5$	$\phi 4.5 - \phi 5.7$	$\phi 5.7 - \phi 7.6$	$\phi 7.6 - \phi 11.4$	$\phi 11.4 - \phi 22.8$	$\geq \phi 22.8$	$\leq \phi 11.4$	$\phi 11.4 - \phi 22.8$	$\geq \phi 22.8$
1.5	$\leq \phi 5.5$	$\phi 5.5 - \phi 6.8$	$\phi 6.8 - \phi 9.1$	$\phi 9.1 - \phi 13.7$	$\phi 13.7 - \phi 27.4$	$\geq \phi 27.4$	$\leq \phi 13.7$	$\phi 13.7 - \phi 27.4$	$\geq \phi 27.4$
1.75	$\leq \phi 6.4$	$\phi 6.4 - \phi 8.0$	$\phi 8.0 - \phi 10.6$	$\phi 10.6 - \phi 16.0$	$\phi 16.0 - \phi 31.9$	$\geq \phi 31.9$	$\leq \phi 16.0$	$\phi 16.0 - \phi 31.9$	$\geq \phi 31.9$
2	$\leq \phi 7.3$	$\phi 7.3 - \phi 9.1$	$\phi 9.1 - \phi 12.1$	$\phi 12.1 - \phi 18.2$	$\phi 18.2 - \phi 36.5$	$\geq \phi 36.5$	$\leq \phi 18.2$	$\phi 18.2 - \phi 36.5$	$\geq \phi 36.5$
2.5	$\leq \phi 9.1$	$\phi 9.1 - \phi 11.4$	$\phi 11.4 - \phi 15.2$	$\phi 15.2 - \phi 22.8$	$\phi 22.8 - \phi 45.6$	$\geq \phi 45.6$	$\leq \phi 22.8$	$\phi 22.8 - \phi 45.6$	$\geq \phi 45.6$
3	$\leq \phi 10.9$	$\phi 10.9 - \phi 13.7$	$\phi 13.7 - \phi 18.2$	$\phi 18.2 - \phi 27.3$	$\phi 27.3 - \phi 54.7$	$\geq \phi 54.7$	$\leq \phi 27.3$	$\phi 27.3 - \phi 54.7$	$\geq \phi 54.7$
3.5	$\leq \phi 12.7$	$\phi 12.7 - \phi 15.9$	$\phi 15.9 - \phi 21.3$	$\phi 21.3 - \phi 31.9$	$\phi 31.9 - \phi 63.8$	$\geq \phi 63.8$	$\leq \phi 31.9$	$\phi 31.9 - \phi 63.8$	$\geq \phi 63.8$
4	$\leq \phi 14.6$	$\phi 14.6 - \phi 18.2$	$\phi 18.2 - \phi 24.3$	$\phi 24.3 - \phi 36.5$	$\phi 36.5 - \phi 72.9$	$\geq \phi 72.9$	$\leq \phi 36.5$	$\phi 36.5 - \phi 72.9$	$\geq \phi 72.9$
4.5	$\leq \phi 16.4$	$\phi 16.4 - \phi 20.5$	$\phi 20.5 - \phi 27.3$	$\phi 27.3 - \phi 41.0$	$\phi 41.0 - \phi 82.1$	$\geq \phi 82.1$	$\leq \phi 41.0$	$\phi 41.0 - \phi 82.1$	$\geq \phi 82.1$
5	$\leq \phi 18.2$	$\phi 18.2 - \phi 22.8$	$\phi 22.8 - \phi 30.4$	$\phi 30.4 - \phi 45.6$	$\phi 45.6 - \phi 91.2$	$\geq \phi 91.2$	$\leq \phi 45.6$	$\phi 45.6 - \phi 91.2$	$\geq \phi 91.2$

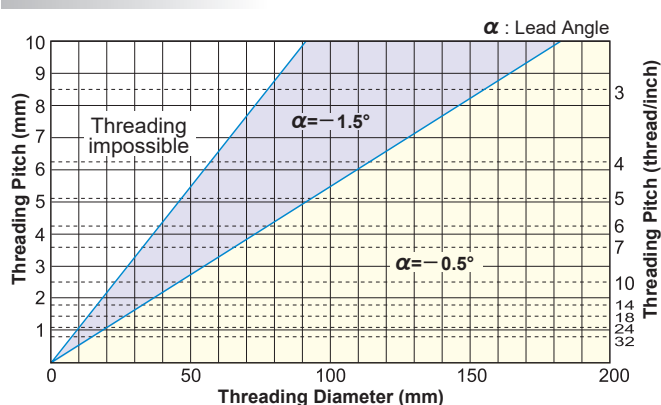
* Back turning in the case of left hand threads.

SHIM REFERENCE GRAPH (Thread angle 30° and 29°)

Right Hand Thread



Left Hand Thread



Note 1) When a thread lead angle $\leq$ the tool flank angle, change the shim to prevent side interference with the insert.
(Refer to the table below for the calculation of thread lead angle and tool flank angle.)

Selection table

Lead Angle	Opening angle 60°/55° Right Hand Thread		Opening angle 60°/55° * Left Hand Thread		Opening angle 30°/29° Right Hand Thread		Opening angle 30°/29° * Left Hand Thread	
0	P05	P05	N05	N05	P05	P05	N05	N05
0.5	P05	P05	N05	N05	P05	P05	N05	N05
1	P15	P15	N15	N15	P15	P15	N15	N15
1.5	P15	P15	N15	N15	P15	P15	N15	N15
2	P25	P25	N15	N15	P25	P25	Compatible	Compatible
2.5	P25	P25	Compatible	Compatible	P25	P25	Compatible	Compatible
3	P35	P35	Compatible	Compatible	P35	P35	Compatible	Compatible
3.5	P35	P35	Compatible	Compatible	P35	P35	Compatible	Compatible
4	P45	P45	Compatible	Compatible	P45	P45	Compatible	Compatible
4.5	P45	P45	Compatible	Compatible	P45	P45	Compatible	Compatible
5	P45	P45	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
5.5	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible

* Back turning in the case of left hand threads.

When replacing a shim, check if the difference between the thread lead angle and shim inclination angle is within:
2.5°—0.5° where thread helix angle is 60° (55°)
2°—1° where thread helix angle is 30° (29°)
* Inclination angle of a standard shim is 0°.
* The holder has a 1.5° lead angle.

CALCULATION OF THREAD LEAD ANGLE

$$\tan \alpha = \frac{l}{\pi d} = \frac{nP}{\pi d}$$

α : Lead angle
 l : Lead
 n : Number of threads
 P : Pitch
 d : Effective diameter of thread

EXAMPLE OF SELECTING A SHIM

- When the thread lead angle is 2.2°
 - In the case when the thread helix angle is 60°
(2.2° lead angle) — (2.5°—0.5°) = -0.3°—1.7° shim inclination angle is appropriate.
Threading with a standard shim (0° inclination angle) is possible. But, replacing with a shim with a 1° inclination angle is recommended, refer to Standard Shim List on pages 13 and 18.
 - In the case when the thread helix angle is 30°
(2.2° lead angle) — (2°—1°) = -0.2°—1.2° shim inclination angle is appropriate.
Replacing with a shim with a 1° inclination angle is recommended, referring to Standard Shim List on pages 13 and 18.

RELIEF ANGLE OF AN INSERT SET ON A HOLDER

Thread Helix Angle	Internal Relief Angle	External Relief Angle
60°	8.8°	5.8°
55°	7.9°	5.2°
30°	4.1°	2.7°
29°	4°	2.6°

- Relief angles (β_2 , β_1) of an insert become small when the thread helix angle of a trapezoidal, round, or other thread is small. Take care when selecting a shim.

* Please refer to the "Calculation of Thread Lead Angle" on the website from given QR Code.



<https://www.mitsubishicarbide.com/index.php?cid=2884>

THREADING

MMT STANDARD OF DEPTH OF CUT EXTERNAL (RADIAL INFEEED)

ISO Metric

Pitch (mm)	Total Cutting Depth	Number of Passes														Insert Type	
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	G-class ground inserts	M-class inserts with 3-D chip breakers
0.5	0.31	0.10	0.08	0.07	0.06											MMT16ER050ISO	—
0.75	0.46	0.16	0.14	0.10	0.06											MMT16ER075ISO	—
1.0	0.61	0.18	0.15	0.12	0.10	0.06										MMT16ER100ISO	MMT16ER100ISO-S
1.25	0.77	0.19	0.17	0.14	0.11	0.10	0.06									MMT16ER125ISO	MMT16ER125ISO-S
1.5	0.92	0.22	0.21	0.17	0.14	0.12	0.06									MMT16ER150ISO	MMT16ER150ISO-S
1.75	1.07	0.22	0.21	0.16	0.13	0.11	0.09	0.09	0.06							MMT16ER175ISO	MMT16ER175ISO-S
2.0	1.23	0.24	0.23	0.17	0.16	0.14	0.12	0.11	0.06							MMT16ER200ISO	MMT16ER200ISO-S
2.5	1.53	0.26	0.23	0.19	0.17	0.15	0.13	0.12	0.11	0.11	0.06					MMT16ER250ISO	MMT16ER250ISO-S
3.0	1.84	0.27	0.25	0.20	0.18	0.16	0.14	0.13	0.12	0.12	0.11	0.10	0.06			MMT16ER300ISO	MMT16ER300ISO-S
3.5	2.15	0.33	0.30	0.24	0.21	0.18	0.17	0.15	0.14	0.14	0.12	0.11	0.06			MMT22ER350ISO	—
4.0	2.45	0.34	0.31	0.24	0.22	0.19	0.17	0.16	0.14	0.14	0.13	0.12	0.12	0.11	0.06	MMT22ER400ISO	—
4.5	2.76	0.38	0.34	0.28	0.24	0.22	0.20	0.18	0.16	0.16	0.15	0.14	0.13	0.12	0.06	MMT22ER450ISO	—
5.0	3.07	0.42	0.38	0.32	0.27	0.24	0.22	0.20	0.18	0.18	0.17	0.16	0.15	0.12	0.06	MMT22ER500ISO	—

American UN

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes														Insert Type	
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	G-class ground inserts	M-class inserts with 3-D chip breakers
32	0.49	0.17	0.15	0.11	0.06											MMT16ER320UN	—
28	0.56	0.17	0.14	0.10	0.09	0.06										MMT16ER280UN	—
24	0.65	0.18	0.16	0.14	0.11	0.06										MMT16ER240UN	—
20	0.78	0.20	0.18	0.13	0.11	0.10	0.06									MMT16ER200UN	—
18	0.87	0.22	0.20	0.15	0.13	0.11	0.06									MMT16ER180UN	—
16	0.97	0.22	0.20	0.15	0.12	0.11	0.11	0.06								MMT16ER160UN	MMT16ER160UN-S
14	1.11	0.23	0.21	0.16	0.13	0.11	0.11	0.10	0.06							MMT16ER140UN	MMT16ER140UN-S
13	1.20	0.25	0.22	0.17	0.14	0.13	0.12	0.11	0.06							MMT16ER130UN	—
12	1.30	0.28	0.23	0.18	0.16	0.14	0.13	0.12	0.06							MMT16ER120UN	MMT16ER120UN-S
11	1.42	0.28	0.23	0.19	0.16	0.14	0.13	0.12	0.11	0.06						MMT16ER110UN	—
10	1.56	0.28	0.24	0.19	0.16	0.14	0.13	0.13	0.12	0.11	0.06					MMT16ER100UN	—
9	1.73	0.34	0.29	0.22	0.17	0.15	0.14	0.13	0.12	0.11	0.06					MMT16ER090UN	—
8	1.95	0.35	0.30	0.24	0.19	0.16	0.15	0.14	0.13	0.12	0.11	0.06				MMT16ER080UN	—
7	2.22	0.37	0.33	0.28	0.24	0.20	0.17	0.16	0.15	0.14	0.12	0.06				MMT22ER070UN	—
6	2.60	0.42	0.35	0.29	0.25	0.21	0.18	0.17	0.16	0.15	0.13	0.12	0.11	0.06		MMT22ER060UN	—
5	3.12	0.43	0.39	0.31	0.27	0.24	0.22	0.20	0.19	0.19	0.18	0.17	0.15	0.12	0.06	MMT22ER050UN	—

Whitworth for BSW, BSP

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes														Insert Type	
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	G-class ground inserts	M-class inserts with 3-D chip breakers
28	0.58	0.17	0.14	0.11	0.10	0.06										MMT16ER280W	—
26	0.63	0.18	0.15	0.13	0.11	0.06										MMT16ER260W	—
20	0.81	0.20	0.18	0.14	0.12	0.11	0.06									MMT16ER200W	—
19	0.86	0.21	0.19	0.15	0.13	0.12	0.06									MMT16ER190W	MMT16ER190W-S
18	0.90	0.25	0.19	0.15	0.13	0.12	0.06									MMT16ER180W	—
16	1.02	0.21	0.18	0.15	0.13	0.11	0.09	0.09	0.06							MMT16ER160W	—
14	1.16	0.23	0.21	0.17	0.14	0.12	0.12	0.11	0.06							MMT16ER140W	MMT16ER140W-S
12	1.36	0.27	0.25	0.20	0.16	0.15	0.14	0.13	0.06							MMT16ER120W	—
11	1.48	0.27	0.24	0.20	0.17	0.15	0.14	0.13	0.12	0.06						MMT16ER110W	MMT16ER110W-S
10	1.63	0.27	0.25	0.20	0.17	0.15	0.15	0.13	0.13	0.12	0.06					MMT16ER100W	—
9	1.81	0.28	0.26	0.21	0.18	0.16	0.15	0.14	0.13	0.12	0.12	0.06				MMT16ER090W	—
8	2.03	0.30	0.27	0.22	0.19	0.17	0.16	0.15	0.14	0.13	0.12	0.12	0.06			MMT16ER080W	—
7	2.32	0.34	0.32	0.26	0.22	0.20	0.18	0.17	0.16	0.15	0.14	0.12	0.06			MMT22ER070W	—
6	2.71	0.35	0.33	0.27	0.23	0.21	0.20	0.19	0.17	0.16	0.15	0.14	0.13	0.12	0.06	MMT22ER060W	—
5	3.25	0.42	0.40	0.35	0.29	0.26	0.24	0.22	0.20	0.19	0.18	0.17	0.15	0.12	0.06	MMT22ER050W	—

BSPT

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes														Insert Type	
		1	2	3	4	5	6	7	8	9						G-class ground inserts	M-class inserts with 3-D chip breakers
28	0.58	0.17	0.14	0.11	0.10	0.06										MMT16ER280BSPT	—
19	0.86	0.22	0.19	0.15	0.12	0.12	0.06									MMT16ER190BSPT	MMT16ER190BSPT-S
14	1.16	0.24	0.20	0.17	0.14	0.12	0.12	0.11	0.06							MMT16ER140BSPT	MMT16ER140BSPT-S
11	1.48	0.25	0.23	0.21	0.18	0.16	0.14	0.13	0.12	0.06						MMT16ER110BSPT	MMT16ER110BSPT-S

Note 1) • Set the finishing allowance on a diameter at approx. 0.1mm when using a full form insert.

- Please note the cutting depth and the number of passes when a corner radius of a partial form insert or of an internal threading insert is small to prevent damage to the insert corner.
- Please set the cutting depth sufficiently deep enough on materials such as hardened steel or austenitic stainless steel to help prevent premature wear and chipping caused by the outer layer of the material.

MMT STANDARD OF DEPTH OF CUT EXTERNAL (RADIAL INFEEED)

Round DIN 405

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes														Insert Type
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	
10	1.27	0.23	0.21	0.20	0.19	0.16	0.12	0.10	0.06							MMT16ER100RD
8	1.59	0.23	0.21	0.20	0.19	0.18	0.16	0.14	0.12	0.10	0.06					MMT16ER080RD
6	2.12	0.26	0.25	0.24	0.22	0.21	0.19	0.17	0.16	0.14	0.12	0.10	0.06			MMT16ER060RD
4	3.18	0.34	0.33	0.32	0.30	0.28	0.26	0.24	0.22	0.20	0.19	0.17	0.15	0.12	0.06	MMT22ER040RD

ISO Trapezoidal 30°

Pitch (mm)	Total Cutting Depth	Number of Passes														Insert Type
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	
1.5	0.90	0.23	0.21	0.16	0.13	0.11	0.06									MMT16ER150TR
2.0	1.25	0.29	0.26	0.21	0.17	0.14	0.12	0.06								MMT16ER200TR
3.0	1.75	0.32	0.31	0.24	0.19	0.18	0.17	0.15	0.13	0.06						MMT16ER300TR
4.0	2.25	0.33	0.32	0.24	0.22	0.21	0.17	0.16	0.15	0.14	0.13	0.12	0.06			MMT22ER400TR
5.0	2.75	0.35	0.32	0.26	0.24	0.22	0.21	0.19	0.19	0.17	0.15	0.14	0.13	0.12	0.06	MMT22ER500TR

American ACME

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes														Insert Type
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	
12	1.19	0.27	0.23	0.20	0.17	0.14	0.12	0.06								MMT16ER120ACME
10	1.52	0.29	0.25	0.21	0.18	0.16	0.14	0.12	0.11	0.06						MMT16ER100ACME
8	1.84	0.30	0.26	0.22	0.19	0.16	0.15	0.14	0.13	0.12	0.11	0.06				MMT16ER080ACME
6	2.37	0.34	0.30	0.27	0.24	0.21	0.19	0.16	0.14	0.12	0.12	0.11	0.11	0.06		MMT22ER060ACME
5	2.79	0.36	0.33	0.30	0.26	0.23	0.20	0.18	0.17	0.16	0.15	0.14	0.13	0.12	0.06	MMT22ER050ACME

UNJ

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes														Insert Type
		1	2	3	4	5	6	7	8	9	10	11				
32	0.46	0.16	0.14	0.10	0.06											MMT16ER320UNJ
28	0.52	0.16	0.12	0.09	0.06											MMT16ER280UNJ
24	0.61	0.17	0.14	0.10	0.06											MMT16ER240UNJ
20	0.73	0.19	0.16	0.13	0.10	0.09	0.06									MMT16ER200UNJ
18	0.81	0.23	0.18	0.14	0.10	0.10	0.06									MMT16ER180UNJ
16	0.92	0.26	0.21	0.14	0.12	0.10	0.09									MMT16ER160UNJ
14	1.05	0.26	0.23	0.17	0.12	0.11	0.10	0.06								MMT16ER140UNJ
12	1.22	0.28	0.27	0.20	0.17	0.13	0.11	0.06								MMT16ER120UNJ
10	1.47	0.30	0.29	0.21	0.15	0.13	0.12	0.11	0.10	0.06						MMT16ER100UNJ
8	1.83	0.31	0.30	0.23	0.18	0.15	0.14	0.13	0.12	0.11	0.10	0.06				MMT16ER080UNJ

API Buttress Casing

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes														Insert Type
		1	2	3	4	5	6	7	8	9	10	11				
5	1.55	0.25	0.23	0.17	0.15	0.13	0.12	0.12	0.11	0.11	0.10	0.06				MMT22ER050APBU

API Round Casing&Tubing

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes														Insert Type
		1	2	3	4	5	6	7	8	9	10	11	12			
10	1.41	0.25	0.23	0.16	0.14	0.12	0.12	0.12	0.11	0.10	0.06					MMT16ER100APRD
8	1.81	0.25	0.24	0.19	0.16	0.14	0.14	0.13	0.13	0.13	0.13	0.11	0.06			MMT16ER080APRD

American NPT

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes															Insert Type
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	
27	0.66	0.15	0.13	0.12	0.11	0.09	0.06										MMT16ER270NPT
18	1.01	0.20	0.16	0.14	0.13	0.12	0.11	0.09	0.06								MMT16ER180NPT
14	1.33	0.23	0.19	0.16	0.14	0.13	0.12	0.11	0.10	0.09	0.06						MMT16ER140NPT
11.5	1.64	0.24	0.19	0.17	0.15	0.15	0.13	0.13	0.12	0.11	0.10	0.09	0.06				MMT16ER115NPT
8	2.42	0.33	0.28	0.23	0.20	0.18	0.16	0.15	0.14	0.13	0.12	0.12	0.11	0.11	0.10	0.06	MMT16ER080NPT

American NPTF

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes															Insert Type
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	
27	0.64	0.16	0.14	0.11	0.09	0.08	0.06										MMT16ER270NPTF
18	1.00	0.19	0.16	0.14	0.13	0.12	0.11	0.09	0.06								MMT16ER180NPTF
14	1.35	0.23	0.21	0.16	0.14	0.13	0.12	0.11	0.10	0.09	0.06						MMT16ER140NPTF
11.5	1.63	0.24	0.23	0.19	0.15	0.13	0.11	0.11	0.10	0.10	0.10	0.10	0.06				MMT16ER115NPTF
8	2.38	0.32	0.27	0.23	0.19	0.17	0.16	0.15	0.14	0.13	0.12	0.12	0.11	0.11	0.10	0.06	MMT16ER080NPTF

Note 1) • Set the finishing allowance on a diameter at approx. 0.1mm when using a full form insert.

- Please note the cutting depth and the number of passes when a corner radius of a partial form insert or of an internal threading insert is small to prevent damage to the insert corner.
- Please set the cutting depth sufficiently deep enough on materials such as hardened steel or austenitic stainless steel to help prevent premature wear and chipping caused by the outer layer of the material.

THREADING

MMT STANDARD OF DEPTH OF CUT INTERNAL (RADIAL INFED)

ISO Metric

Pitch (mm)	Total Cutting Depth	Number of Passes														Insert Type			
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	G-class ground inserts		M-class inserts with 3-D chip breakers	
0.5	0.29	0.09	0.07	0.07	0.06											MMT11IR050ISO	MMT16IR050ISO	—	—
0.75	0.43	0.15	0.13	0.09	0.06											MMT11IR075ISO	MMT16IR075ISO	—	—
1.0	0.58	0.17	0.15	0.11	0.09	0.06										MMT11IR100ISO	MMT16IR100ISO	MMT11IR100ISO-S	MMT16IR100ISO-S
1.25	0.72	0.18	0.16	0.12	0.11	0.09	0.06									MMT11IR125ISO	MMT16IR125ISO	MMT11IR125ISO-S	MMT16IR125ISO-S
1.5	0.87	0.21	0.20	0.16	0.13	0.11	0.06									MMT11IR150ISO	MMT16IR150ISO	MMT11IR150ISO-S	MMT16IR150ISO-S
1.75	1.01	0.21	0.20	0.15	0.12	0.10	0.09	0.08	0.06							MMT11IR175ISO	MMT16IR175ISO	—	MMT16IR175ISO-S
2.0	1.15	0.24	0.22	0.18	0.14	0.12	0.10	0.09	0.06							MMT11IR200ISO	MMT16IR200ISO	—	MMT16IR200ISO-S
2.5	1.44	0.25	0.24	0.21	0.15	0.13	0.12	0.10	0.09	0.09	0.06					—	MMT16IR250ISO	—	MMT16IR250ISO-S
3.0	1.73	0.26	0.25	0.22	0.17	0.14	0.13	0.12	0.11	0.10	0.09	0.08	0.06			—	MMT16IR300ISO	—	MMT16IR300ISO-S
3.5	2.02	0.32	0.30	0.23	0.19	0.17	0.15	0.14	0.13	0.12	0.11	0.10	0.06			—	MMT22IR350ISO	—	—
4.0	2.31	0.33	0.31	0.24	0.22	0.18	0.15	0.14	0.13	0.12	0.12	0.11	0.10	0.10	0.06	—	MMT22IR400ISO	—	—
4.5	2.60	0.36	0.33	0.28	0.24	0.21	0.19	0.16	0.15	0.14	0.13	0.12	0.12	0.11	0.06	—	MMT22IR450ISO	—	—
5.0	2.89	0.41	0.38	0.32	0.27	0.24	0.21	0.18	0.16	0.15	0.14	0.13	0.12	0.12	0.06	—	MMT22IR500ISO	—	—

American UN

Pitch (thread/inch)	Total Cutting Depth	Number of Passes														Insert Type		
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	G-class ground inserts		M-class inserts with 3-D chip breakers
32	0.46	0.16	0.14	0.10	0.06											MMT11IR320UN	MMT16IR320UN	—
28	0.52	0.16	0.13	0.09	0.08	0.06										MMT11IR280UN	MMT16IR280UN	—
24	0.61	0.17	0.15	0.13	0.10	0.06										MMT11IR240UN	MMT16IR240UN	—
20	0.73	0.18	0.15	0.13	0.11	0.10	0.06									MMT11IR200UN	MMT16IR200UN	—
18	0.81	0.20	0.18	0.14	0.12	0.11	0.06									MMT11IR180UN	MMT16IR180UN	—
16	0.92	0.20	0.18	0.15	0.12	0.11	0.10	0.06								MMT11IR160UN	MMT16IR160UN	MMT16IR160UN-S
14	1.05	0.21	0.18	0.15	0.13	0.11	0.11	0.10	0.06							MMT11IR140UN	MMT16IR140UN	MMT16IR140UN-S
13	1.13	0.22	0.19	0.16	0.14	0.13	0.12	0.11	0.06							—	MMT16IR130UN	—
12	1.22	0.24	0.22	0.18	0.16	0.13	0.12	0.11	0.06							—	MMT16IR120UN	MMT16IR120UN-S
11	1.33	0.24	0.22	0.20	0.15	0.12	0.12	0.11	0.11	0.06						—	MMT16IR110UN	—
10	1.47	0.25	0.22	0.21	0.14	0.13	0.12	0.12	0.11	0.11	0.06					—	MMT16IR100UN	—
9	1.63	0.31	0.23	0.21	0.17	0.15	0.14	0.13	0.12	0.11	0.06					—	MMT16IR090UN	—
8	1.83	0.31	0.26	0.21	0.18	0.16	0.15	0.14	0.13	0.12	0.11	0.06				—	MMT16IR080UN	—
7	2.09	0.36	0.30	0.24	0.21	0.18	0.17	0.16	0.15	0.14	0.12	0.06				—	MMT22IR070UN	—
6	2.44	0.40	0.33	0.25	0.23	0.19	0.17	0.16	0.15	0.14	0.13	0.12	0.11	0.06		—	MMT22IR060UN	—
5	2.93	0.41	0.35	0.31	0.26	0.23	0.21	0.20	0.19	0.17	0.15	0.14	0.13	0.12	0.06	—	MMT22IR050UN	—

Whitworth for BSW, BSP

Pitch (thread/inch)	Total Cutting Depth	Number of Passes														Insert Type		
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	G-class ground inserts		M-class inserts with 3-D chip breakers
28	0.58	0.17	0.14	0.11	0.10	0.06										—	MMT16IR280W	—
26	0.63	0.18	0.15	0.13	0.11	0.06										—	MMT16IR260W	—
20	0.81	0.20	0.18	0.14	0.12	0.11	0.06									—	MMT16IR200W	—
19	0.86	0.21	0.19	0.15	0.13	0.12	0.06									MMT11IR190W	MMT16IR190W	MMT16IR190W-S
18	0.90	0.25	0.19	0.15	0.13	0.12	0.06									—	MMT16IR180W	—
16	1.02	0.21	0.18	0.15	0.13	0.11	0.09	0.09	0.06							—	MMT16IR160W	—
14	1.16	0.23	0.21	0.17	0.14	0.12	0.12	0.11	0.06							MMT11IR140W	MMT16IR140W	MMT16IR140W-S
12	1.36	0.27	0.25	0.20	0.16	0.15	0.14	0.13	0.06							—	MMT16IR120W	MMT16IR120W-S
11	1.48	0.27	0.24	0.20	0.17	0.15	0.14	0.13	0.12	0.06						—	MMT16IR110W	—
10	1.63	0.27	0.25	0.20	0.17	0.15	0.15	0.13	0.13	0.12	0.06					—	MMT16IR100W	—
9	1.81	0.28	0.26	0.21	0.18	0.16	0.15	0.14	0.13	0.12	0.12	0.06				—	MMT16IR090W	—
8	2.03	0.30	0.27	0.22	0.19	0.17	0.16	0.15	0.14	0.13	0.12	0.12	0.06			—	MMT16IR080W	—
7	2.32	0.34	0.32	0.26	0.22	0.20	0.18	0.17	0.16	0.15	0.14	0.12	0.06			—	MMT22IR070W	—
6	2.71	0.35	0.33	0.27	0.23	0.21	0.20	0.19	0.17	0.16	0.15	0.14	0.13	0.12	0.06	—	MMT22IR060W	—
5	3.25	0.42	0.40	0.35	0.29	0.26	0.24	0.22	0.20	0.19	0.18	0.17	0.15	0.12	0.06	—	MMT22IR050W	—

Note 1) • Set the finishing allowance on a diameter at approx. 0.1mm when using a full form insert.

- Please note the cutting depth and the number of passes when a corner radius of a partial form insert or of an internal threading insert is small to prevent damage to the insert corner.
- Please set the cutting depth sufficiently deep enough on materials such as hardened steel or austenitic stainless steel to help prevent premature wear and chipping caused by the outer layer of the material.

MMT STANDARD OF DEPTH OF CUT INTERNAL (RADIAL INFED)

■ BSPT

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes														Insert Type		
		1	2	3	4	5	6	7	8	9						G-class ground inserts		M-class inserts with 3-D chip breakers
19	0.86	0.22	0.19	0.15	0.12	0.12	0.06									MMT11IR190BSPT	MMT16IR190BSPT	MMT16IR190BSPT-S
14	1.16	0.24	0.20	0.17	0.14	0.12	0.12	0.11	0.06							MMT11IR140BSPT	MMT16IR140BSPT	MMT16IR140BSPT-S
11	1.48	0.25	0.23	0.21	0.18	0.16	0.14	0.13	0.12	0.06						—	MMT16IR110BSPT	MMT16IR110BSPT-S

■ Round DIN 405

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes														Insert Type		
		1	2	3	4	5	6	7	8	9	10	11	12	13	14			
10	1.27	0.23	0.21	0.20	0.19	0.16	0.12	0.10	0.06							MMT16IR100RD		
8	1.59	0.23	0.21	0.20	0.19	0.18	0.16	0.14	0.12	0.10	0.06					MMT16IR080RD		
6	2.12	0.26	0.25	0.24	0.22	0.21	0.19	0.17	0.16	0.14	0.12	0.10	0.06			MMT16IR060RD		
4	3.18	0.34	0.33	0.32	0.30	0.28	0.26	0.24	0.22	0.20	0.19	0.17	0.15	0.12	0.06	MMT22IR040RD		

■ ISO Trapezoidal 30°

Pitch (mm)	Total Cutting Depth	Number of Passes														Insert Type		
		1	2	3	4	5	6	7	8	9	10	11	12	13	14			
1.5	0.90	0.23	0.21	0.16	0.13	0.11	0.06									MMT16IR150TR		
2	1.25	0.29	0.26	0.21	0.17	0.14	0.12	0.06								MMT16IR200TR		
3	1.75	0.32	0.31	0.24	0.19	0.18	0.17	0.15	0.13	0.06						MMT16IR300TR		
4	2.25	0.33	0.32	0.24	0.22	0.21	0.17	0.16	0.15	0.14	0.13	0.12	0.06			MMT22IR400TR		
5	2.75	0.35	0.32	0.26	0.24	0.22	0.21	0.19	0.19	0.17	0.15	0.14	0.13	0.12	0.06	MMT22IR500TR		

■ American ACME

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes														Insert Type		
		1	2	3	4	5	6	7	8	9	10	11	12	13	14			
12	1.19	0.27	0.23	0.20	0.17	0.14	0.12	0.06								MMT16IR120ACME		
10	1.52	0.29	0.25	0.21	0.18	0.16	0.14	0.12	0.11	0.06						MMT16IR100ACME		
8	1.84	0.30	0.26	0.22	0.19	0.16	0.15	0.14	0.13	0.12	0.11	0.06				MMT16IR080ACME		
6	2.37	0.34	0.30	0.27	0.24	0.21	0.19	0.16	0.14	0.12	0.12	0.11	0.11	0.06		MMT22IR060ACME		
5	2.79	0.36	0.33	0.30	0.26	0.23	0.20	0.18	0.17	0.16	0.15	0.14	0.13	0.12	0.06	MMT22IR050ACME		

■ API Buttress Casing

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes											Insert Type					
		1	2	3	4	5	6	7	8	9	10	11						
5	1.55	0.25	0.23	0.17	0.15	0.13	0.12	0.12	0.11	0.11	0.10	0.06	MMT22IR050APBU					

■ API Round Casing&Tubing

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes												Insert Type				
		1	2	3	4	5	6	7	8	9	10	11	12					
10	1.41	0.25	0.23	0.16	0.14	0.12	0.12	0.12	0.11	0.10	0.06			MMT16IR100APRD				
8	1.81	0.25	0.24	0.19	0.16	0.14	0.14	0.13	0.13	0.13	0.13	0.11	0.06	MMT16IR080APRD				

■ American NPT

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes															Insert Type		
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15			
27	0.66	0.15	0.13	0.12	0.11	0.09	0.06										MMT16IR270NPT		
18	1.01	0.20	0.16	0.14	0.13	0.12	0.11	0.09	0.06								MMT16IR180NPT		
14	1.33	0.23	0.19	0.16	0.14	0.13	0.12	0.11	0.10	0.09	0.06						MMT16IR140NPT		
11.5	1.64	0.24	0.19	0.17	0.15	0.15	0.13	0.13	0.12	0.11	0.10	0.09	0.06				MMT16IR115NPT		
8	2.42	0.33	0.28	0.23	0.20	0.18	0.16	0.15	0.14	0.13	0.12	0.12	0.11	0.11	0.10	0.06	MMT16IR080NPT		

■ American NPTF

Pitch (thread/ inch)	Total Cutting Depth	Number of Passes															Insert Type		
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15			
14	1.35	0.23	0.21	0.16	0.14	0.13	0.12	0.11	0.10	0.09	0.06						MMT16IR140NPTF		
11.5	1.63	0.24	0.23	0.19	0.15	0.13	0.11	0.11	0.11	0.10	0.10	0.10	0.06				MMT16IR115NPTF		
8	2.38	0.32	0.27	0.23	0.19	0.17	0.16	0.15	0.14	0.13	0.12	0.12	0.11	0.11	0.10	0.06	MMT16IR080NPTF		

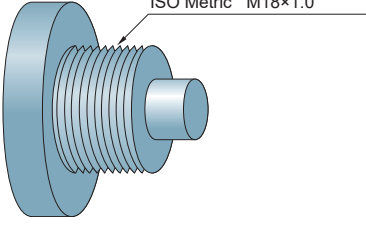
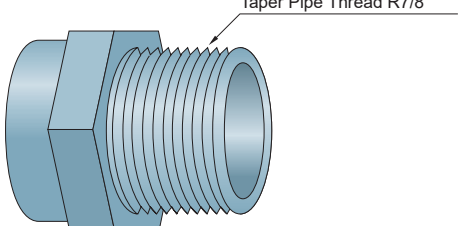
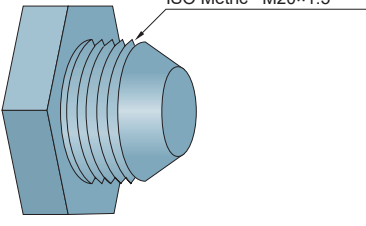
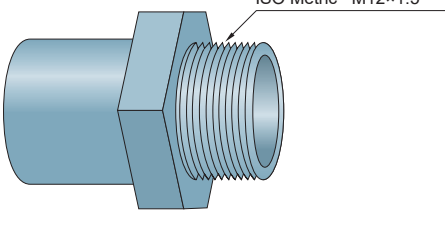
Note 1) • Set the finishing allowance on a diameter at approx. 0.1mm when using a full form insert.

- Please note the cutting depth and the number of passes when a corner radius of a partial form insert or of an internal threading insert is small to prevent damage to the insert corner.
- Please set the cutting depth sufficiently deep enough on materials such as hardened steel or austenitic stainless steel to help prevent premature wear and chipping caused by the outer layer of the material.

TROUBLE SHOOTING

Problems	Observation	Causes	Solutions
Low thread precision.	Threads do not mesh with each other.	Incorrect tool installation.	Set the insert centre height at 0mm.
			Check holder inclination (Lateral).
	Shallow thread.	Incorrect depth of cut.	Modify the depth of cut.
		Lack of insert wear or plastic deformation resistance.	Refer to "Quickly generated flank wear." and "Large plastic deformation." below.
Poor surface finish.	Surface damage.	Chips wrap around or clog the work pieces.	Change to flank infeed and control the chip discharge direction.
			Change to an M-class insert with a 3-D chip breaker.
		The side of the insert cutting edge interferes with the workpiece.	Check the lead angle and select an appropriate shim.
	Surface tears.	Built-up edge (Welding).	Increase cutting speed.
			Increase coolant pressure and volume.
		Cutting resistance too high.	Decrease depth of cut per pass.
	Surface vibrations.	Cutting speed too high.	Decrease the cutting speed.
		Insufficient work piece or tool clamping.	Re-check work piece and tool clamping. (Chuck pressure, clamping allowance)
		Incorrect tool installation.	Set the insert centre height at 0mm.
Short tool life.	Flank wear quickly generated.	Cutting speed too high.	Decrease the cutting speed.
		Too many passes causes abrasive wear.	Reduce the number of passes.
		Small depth of cut for the finishing pass.	Do not re-cut at 0mm depth of cut, larger than 0.05mm depth of cut is recommended.
	Non-uniform wear of the right and left sides of the cutting edge.	The work piece lead angle and the tool lead angle do not match.	Check the work piece lead angle and select an appropriate shim.
	Chipping and fracture.	Cutting speed too low.	Increase cutting speed.
		Cutting resistance too high.	Increase the number of passes and decrease the cutting resistance per pass.
		Unstable clamping.	Check work piece deflection.
			Shorten tool overhang.
			Recheck work piece and tool clamping. (Chuck pressure, clamping allowance)
		Chip packing.	Increase coolant pressure to blow away chips.
			Change the tool pass to control chips. (Lengthen each pass to allow the coolant to clear the chips.
			Change from standard internal cutting to back turning to prevent chip jamming.
		Non-chamfered work pieces causes high resistance at the start of each pass.	Chamfer the workpiece entry and exit faces.
	Large plastic deformation.	High cutting speed and large heat generation.	Decrease the cutting speed.
		Lack of coolant supply.	Check coolant is supply is sufficient.
			Increase coolant pressure and volume.
		Cutting resistance too high.	Increase the number of passes and decrease the cutting resistance per pass.





Application Examples

Insert (Grade)		MMT16ER100ISO (VP10MF)	MMT16ER110BSPT (VP15TF)
Cutting Conditions	Workpiece	JIS SCM35 Plug 	JIS SUS316 Bolt 
	Cutting Speed v_c (m/min)	120	100
	Pass	5	20
	Cutting Method	Radial Infeed	Radial Infeed
	Depth of Cut (mm)	Fixed Cut Area	Fixed Cut Area
Coolant		Wet Cutting	Wet Cutting
Results		piece/corner 1,000 2,000 3,000 MMT  Conventional  MMT inserts had less wear than conventional products. Tool life increased 3 fold.	piece/corner 10 20 30 40 50 MMT  Conventional  MMT inserts suitable for unstable machining without sudden fracturing. Tool life extended by 1.5 times.
Insert (Grade)		MMT16ER150ISO-S (VP15TF)	MMT16ER150ISO-S (VP15TF)
Cutting Conditions	Workpiece	JIS S45C Bolt 	JIS SCM435 Bolt 
	Cutting Speed v_c (m/min)	140	80
	Pass	6	10
	Cutting Method	Radial Infeed	Radial Infeed
	Depth of Cut (mm)	Fixed Cut Area	Fixed Cut Area
Coolant		Wet Cutting	Wet Cutting
Results		piece/corner 300 600 900 MMT  Conventional  MMT inserts had better chip control and produced smaller burrs on incomplete threads compared to conventional products. 3 times longer tool life was possible.	piece/corner 50 100 150 MMT  Conventional  Better chip control from the MMT inserts prevented chips wrapping around the workpiece. Tool life lengthened x 1.5

Cutting Performance

Inconel 718 Comparison of wear by machining length

When threading heat resistant alloys, it suppresses compound damage such as wear and plastic deformation and achieves excellent wear resistance.

Cutting Length	MP9025	Conventional A	Conventional B	Conventional C
20m				
25m				Not machinable
35m		<Cutting Conditions> Workpiece Material : Inconel 718 Insert : ISO Metric 60° Cutting Speed : $v_c = 30$ m/min Pitch : 1.5 mm Depth of Cut : Total 12 passes, total depth of cut 0.92 mm $a_p = 0.1\text{mm} \times 3$ passes, $0.08\text{mm} \times 4$ passes, $0.06\text{mm} \times 5$ passes Cutting Mode : Wet Cutting		

For Your Safety

●Don't handle inserts and chips without gloves. ●Please machine within the recommended application range and exchange expired tools with new ones in advance of breakage. ●Please use safety covers and wear safety glasses. ●When using compounded cutting oils, please take fire precautions. ●When attaching inserts or spare parts, please use only the correct wrench or driver. ●When using rotating tools, please make a trial run to check run-out, vibration and abnormal sounds etc.

MITSUBISHI MATERIALS CORPORATION

MMC Hardmetal (Thailand) Co., Ltd.

622 Emporium Tower, Floor 22/1-4, Sukhumvit Road, Klongton, Klongtoey, Bangkok 10110 Thailand Tel. +66-2661-8170 Fax. +66-2258-1790

Thailand Rayong Branch

789/283 m.1 Lifespace Building Floor. 4 Room no. B405 Nong Kham, Sriracha, Chonburi 20230 Thailand

Singapore Branch

33 Ubi Avenue3, #05-14 Vertex, Singapore 408868 Tel : +65-6634-8250 Fax : +65-6634-8257

Ho Chi Minh Representative Office

1205 12th Floor SROC, 2A-4A Ton Duc Thang, Ben Nghe, Dist. 1, Ho Chi Minh City, Vietnam Tel : +84-28-3829-7700 Fax : +84-28-3824-3344

Thailand Amata City Branch

Amata Nakorn Industrial Estate Phase 9 700/843 Moo 5, Tambon Nongkakhha, Amphur Phanthong, Chonburi, 20160 Thailand Tel : +66-3821-0728 Fax : +66-3821-0732

Indonesia Representative Office

MM2100 Industrial Town Jl. Jawa Blok GG-6 No.2 Jatiwangi, Cikarang, Bekasi Indonesia 17520 Tel : +62-21-2214-3639 Fax : +62-21-2214-3745

Hanoi Representative Office

403A, 4th Fl. of The 6-Storey Block, Thang Long Ford Building, 105 Lang Ha St., Dong Da District, Hanoi, Vietnam Tel : +84-24-3772-8362 Fax : +84-24-3772-8299

<http://www.mmc-carbide.com/>

(Tools specifications subject to change without notice.)