

Coated CBN Grade for Cast Irons

BC5110New
Products

**Excellent Wear Resistance when Turning Grey
Cast Irons at Low Cutting Speeds.
Provides Fine Surface Finishes on Low Rigidity
Workpieces.**



Coated CBN Grade for Cast Irons

BC5110


BC5110 uses a tough substrate with a highly hard coating to provide excellent chipping and wear resistance.

Excellent Chipping Resistance


Compared to conventional grades, the fine grain and high cBN content greatly improves chipping resistance and provides stability and long tool life.

Excellent Wear Resistance Coating

The hard ceramic coating layer provides excellent surface finishes as well as wear and notch resistance during continuous cutting. Additionally, chipping and peeling of the coating layer is suppressed due to the improved bonding strength to the cBN substrate.

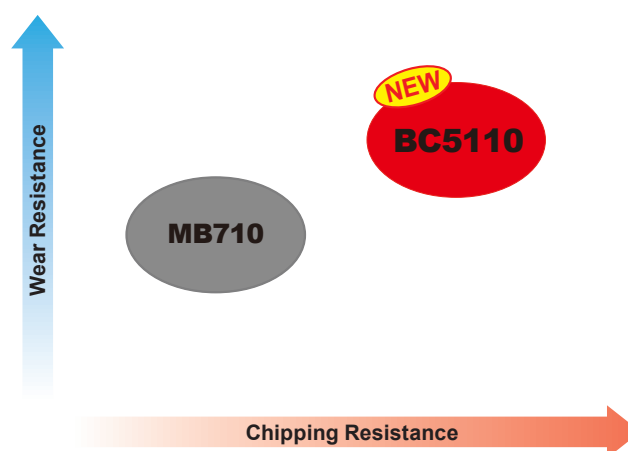

Line-up of Edge Preparation (Honing)

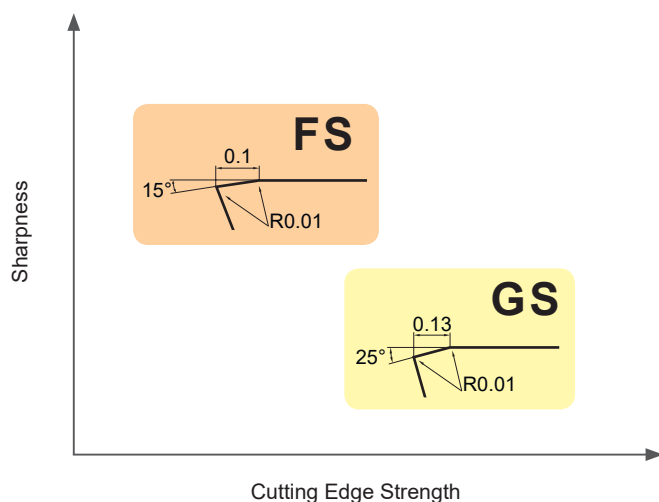

FS Honing

FS honing has a sharp edge with a small chamfer angle for good flank wear resistance. Recommended when burrs and a dull finishes tend to occur.

GS Honing


GS honing is suitable for thin or low rigidity workpiece material and for applications that are prone to chip the cutting edge.

Cutting Performance


Machining FC250 : comparing wear resistance and surface roughness.

The tough substrate and wear resistant coating of BC5110 provides good surface finishes when compared to conventional uncoated grades.

Flank Wear Comparison

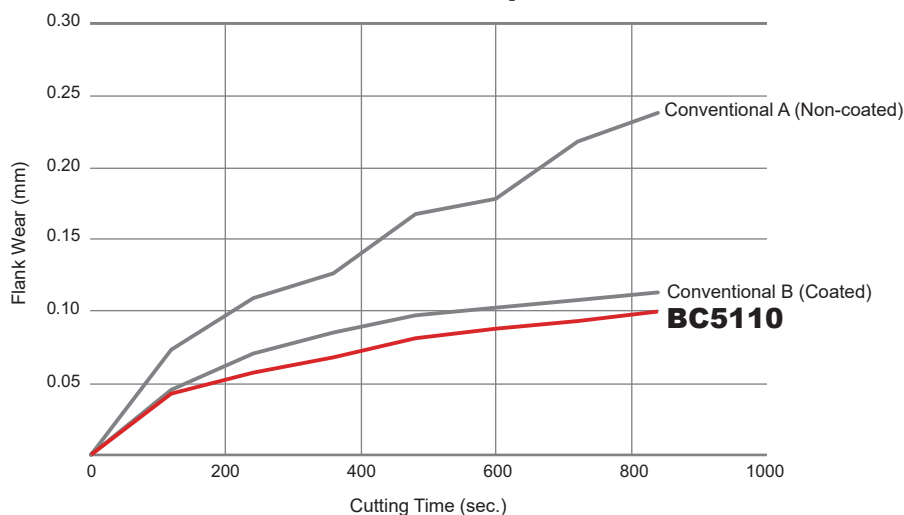


Finished Surface Comparison

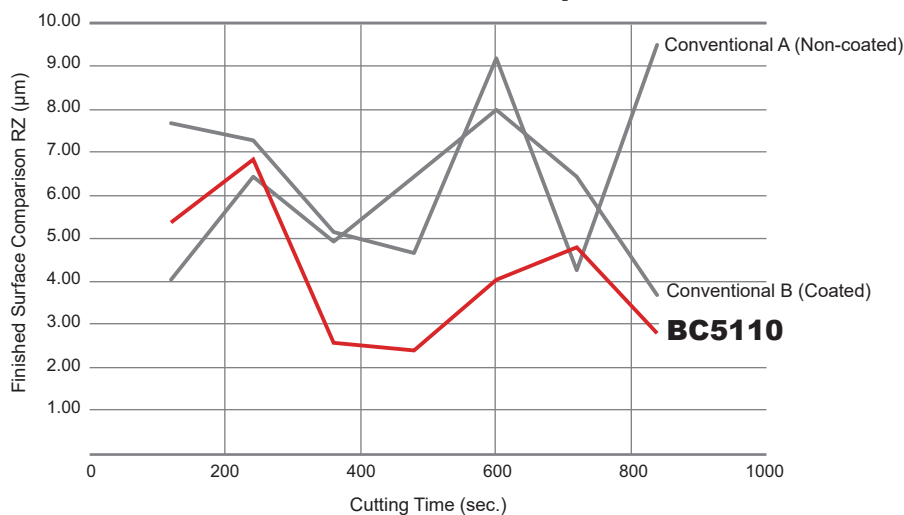

<Cutting Conditions>
 Workpiece Material : JIS FC250
 Inserts : CNGA120408
 Machining Methods : External
 Continuous Cutting
 Cutting Speed : $v_c = 300$ m/min
 Feed per Rev. : $f_r = 0.1$ mm/rev
 Depth of Cut : $a_p = 0.2$ mm
 Cutting Mode : Dry Cutting


BC5110

900 sec.

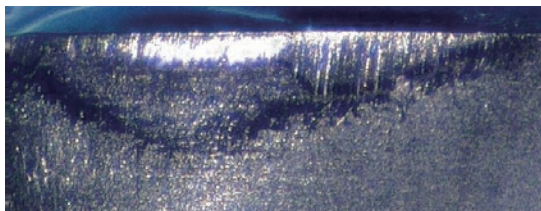

Conventional



900 sec.

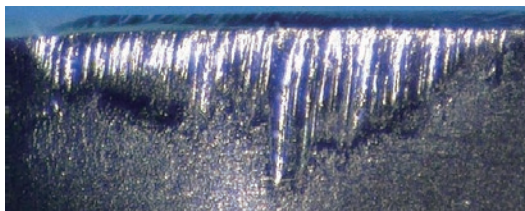

Coated CBN Grade for Cast Irons

Negative Inserts (With Hole)

G Class

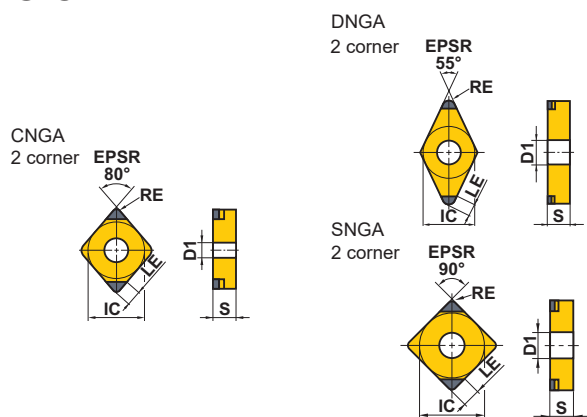
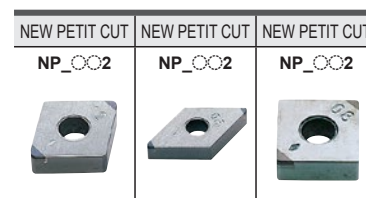


Order Number	Coated CBN	Cutting Edges	IC	S	RE	D1	LE
	BC5110						
NP-CNGA120404FS2	●	2	12.7	4.76	0.4	5.16	1.8
NP-CNGA120408FS2	●	2	12.7	4.76	0.8	5.16	2.0
NP-CNGA120412FS2	●	2	12.7	4.76	1.2	5.16	2.2
NP-CNGA120404GS2	●	2	12.7	4.76	0.4	5.16	1.8
NP-CNGA120408GS2	●	2	12.7	4.76	0.8	5.16	2.0
NP-CNGA120412GS2	●	2	12.7	4.76	1.2	5.16	2.2
NP-DNGA150404FS2	●	2	12.7	4.76	0.4	5.16	2.1
NP-DNGA150408FS2	●	2	12.7	4.76	0.8	5.16	2.0
NP-DNGA150604FS2	●	2	12.7	6.35	0.4	5.16	2.1
NP-DNGA150608FS2	●	2	12.7	6.35	0.8	5.16	2.0
NP-DNGA150404GS2	●	2	12.7	4.76	0.4	5.16	2.1
NP-DNGA150408GS2	●	2	12.7	4.76	0.8	5.16	2.0
NP-DNGA150608GS2	●	2	12.7	6.35	0.8	5.16	2.0
NP-SNGA120408GS2	●	2	12.7	4.76	0.8	5.16	2.2

(mm)

Negative Inserts (With Hole)

G Class

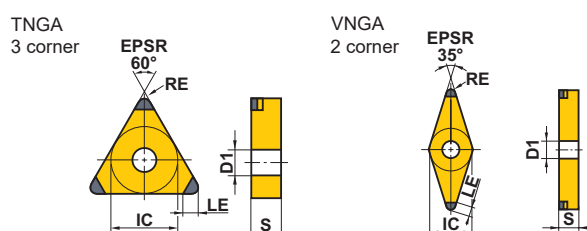

Order Number	Coated CBN	Cutting Edges	IC	S	RE	D1	LE
	BC5110						
NP-TNGA160404FS3	●	3	9.525	4.76	0.4	3.81	1.6
NP-TNGA160408FS3	●	3	9.525	4.76	0.8	3.81	1.7
NP-TNGA160412FS3	●	3	9.525	4.76	1.2	3.81	1.9
NP-TNGA160404GS3	●	3	9.525	4.76	0.4	3.81	1.6
NP-TNGA160408GS3	●	3	9.525	4.76	0.8	3.81	1.7
NP-TNGA160412GS3	●	3	9.525	4.76	1.2	3.81	1.9
NP-VNGA160404FS2	●	2	9.525	4.76	0.4	3.81	2.5
NP-VNGA160408FS2	●	2	9.525	4.76	0.8	3.81	2.0
NP-VNGA160404GS2	●	2	9.525	4.76	0.4	3.81	2.5
NP-VNGA160408GS2	●	2	9.525	4.76	0.8	3.81	2.0

(mm)

● : Inventory maintained in Japan. (1 insert in one case)

Positive Inserts (With Hole)

G Class


NEW PETIT CUT

NP_002



VBGW

2 corner



(mm)

Order Number	Coated CBN	Cutting Edges	IC	S	RE	D1	LE
	BC5110						
NP-VBGW160404GS2	●	2	9.525	4.76	0.4	4.43	2.5
NP-VBGW160408GS2	●	2	9.525	4.76	0.8	4.43	2.0

Positive Inserts (With Hole)


G Class

NEW PETIT CUT

NP_002


NP_002

NP_003




CCGW

2 corner




DCGW

2 corner



TCGW

3 corner



(mm)

Order Number	Coated CBN	Cutting Edges	IC	S	RE	D1	LE
	BC5110						
NP-CCGW060202FS2	●	2	6.35	2.38	0.2	2.8	1.7
NP-CCGW060204FS2	●	2	6.35	2.38	0.4	2.8	1.8
NP-CCGW09T304FS2	●	2	9.525	3.97	0.4	4.4	1.8
NP-CCGW09T308FS2	●	2	9.525	3.97	0.8	4.4	2.0
NP-CCGW060202GS2	●	2	6.35	2.38	0.2	2.8	1.7
NP-CCGW09T304GS2	●	2	9.525	3.97	0.4	4.4	1.8
NP-CCGW09T308GS2	●	2	9.525	3.97	0.8	4.4	2.0
NP-DCGW070204FS2	●	2	6.35	2.38	0.4	2.8	2.1
NP-DCGW11T308FS2	●	2	9.525	3.97	0.8	4.4	2.0
NP-DCGW070204GS2	●	2	6.35	2.38	0.4	2.8	2.1
NP-DCGW11T304GS2	●	2	9.525	3.97	0.4	4.4	2.1
NP-DCGW11T308GS2	●	2	9.525	3.97	0.8	4.4	2.0
NP-TCGW110204FS3	●	3	6.35	2.38	0.4	2.8	1.6
NP-TCGW110208FS3	●	3	6.35	2.38	0.8	2.8	1.7
NP-TCGW090204GS3	●	3	5.56	2.38	0.4	2.5	1.6
NP-TCGW110208GS3	●	3	6.35	2.38	0.8	2.8	1.7

Coated CBN Grade for Cast Irons

Positive Inserts (With Hole)


G Class

NEW PETIT CUT

NP_003



TPGB
3 corner



(mm)

Order Number	Coated CBN	Cutting Edges	IC	S	RE	D1	LE
	BC5110						
NP-TPGB090204FS3	●	3	5.56	2.38	0.4	2.9	1.6
NP-TPGB110304FS3	●	3	6.35	3.18	0.4	3.4	1.6
NP-TPGB110308FS3	●	3	6.35	3.18	0.8	3.4	1.7
NP-TPGB080204GS3	●	3	4.76	2.38	0.4	2.4	1.6
NP-TPGB110304GS3	●	3	6.35	3.18	0.4	3.4	1.6
NP-TPGB110308GS3	●	3	6.35	3.18	0.8	3.4	1.7

Positive Inserts (Without Hole)


G Class

NEW PETIT CUT

NP_002



SPGN
2 corner








(mm)

Order Number	Coated CBN	Cutting Edges	IC	S	RE	D1	LE
	BC5110						
NP-SPGN120412GS2	●	2	12.7	4.76	1.2	—	2.5

● : Inventory maintained in Japan. (1 insert in one case)

Application Examples

Insert		NP-DCGW070204FS2	NP-VCGW160408-FS2	NP-VNGA160408FS2
Workpiece Material	Gray Cast Iron (JIS FC250)		Gray Cast Iron (JIS FC250)	Gray Cast Iron
				
Component		Automotive Parts	Automotive Parts	Ring
Cutting Conditions	Cutting Speed vc (m/min)	364	530	110
	Feed per Rev. f (mm/rev)	0.1	0.1	0.12
	Depth of Cut ap (mm)	0.1	0.1	0.6
Cutting Mode		Wet Cutting	Wet Cutting	Dry Cutting
Results	Number of Workpieces 200 400 600 BC5110  Conventional 		Number of Workpieces 200 400 600 800 BC5110  Conventional 	Number of Workpieces 1000 2000 3000 4000 BC5110  Conventional 
	BC5110 achieved 1.25 X longer tool life with stable dimensional accuracy, without cloudiness on the surface, compared with conventional product		BC5110 achieved 1.5 X longer tool life with suppress the flank wear greatly, compared with conventional product.	BC5110 gave a 50% increase in tool life plus an improved surface finish.

The above application examples are customer's application examples, so it can be different from the recommended conditions.

Recommended Cutting Conditions

Workpiece Material	Cutting Speed vc (m/min)						f (mm/rev)	ap (mm)	Cutting Mode
	100	200	300	400	500	600			
K Gray Cast Irons FC250, FC300 etc.							≤ 0.5	≤ 0.5	Dry, Wet

For Your Safety

●Don't handle inserts and chips without gloves. ●Please machine within the recommended application range and exchange expired tools with new ones in advance of breakage. ●Please use safety covers and wear safety glasses. ●When using compounded cutting oils, please take fire precautions. ●When attaching inserts or spare parts, please use only the correct wrench or driver. ●When using rotating tools, please make a trial run to check run-out, vibration and abnormal sounds etc.

MITSUBISHI MATERIALS CORPORATION

MMC Hardmetal (Thailand) Co., Ltd.

622 Emporium Tower, Floor 22/1-4, Sukhumvit Road, Klongton, Klongtoey, Bangkok 10110 Thailand Tel: +66-2661-8170 Fax: +66-2258-1790

Thailand Rayong Branch

24/1 Moo4 ESIE Plaza 1, 1st Flor., unit G6-B and G6-C, Tambon Pluak Daeng, Rayong 21140 Thailand Tel: +66-3895-5658 Fax: +66-3895-5659

Singapore Branch

33 Ubi Avenue3, #05-14 Vertex, Singapore 408868 Tel: +65-6634-8250 Fax: +65-6634-8257

Ho Chi Minh Representative Office

1205 12th Floor SROC, 2A-4A Ton Duc Thang, Ben Nghe, Dist. 1, Ho Chi Minh City, Vietnam Tel: +84-28-3829-7700 Fax: +84-28-3824-3344

Thailand Amata City Branch

Amata Nakorn Industrial Estate Phase 9 700/843 Moo 5, Tambon Nongkakhha, Amphur Phanthong, Chonburi, 20160 Thailand Tel: +66-3821-0728 Fax: +66-3821-0732

Thailand Korat Branch

1444/2 Moo13, Tambon Choho, Amphur Muang Nakhon Ratchasima, Nakhon Ratchasima 30310 Thailand Tel: +66-6-1416-7246

Indonesia Representative Office

MM2100 Industrial Town Jl. Jawa Blok GG-6 No.2 Jatiwangi, Cikarang, Bekasi Indonesia 17520 Tel: +62-21-2214-3639 Fax: +62-21-2214-3745

Hanoi Representative Office

403A, 4th Fl. of The 6-Storey Block, Thang Long Ford Building, 105 Lang Ha St., Dong Da District, Hanoi, Vietnam Tel: +84-24-3772-8362 Fax: +84-24-3772-8299

<http://www.mitsubishicarbide.com/en/>
(Tools specifications subject to change without notice.)

EXP-20-E001
2020.5.T(-)