

Barrel End Mill for Finish Cutting of Titanium Alloys

SMART MIRACLE
End Mill Series

VQT6UR

New
Product

New Successive Two Radius Design Achieve High Efficiency Machining



Barrel End Mill for Finish Cutting of Titanium Alloys

VQT6UR

**Nose radius suitable for fillet milling,
also tangential form radius fit composite
blade surface machining.**

Radial Accuracy

RE1 and RE2 $\pm 0.010\text{mm}$

Optimum Cutting Edge Design


6-flute Peripheral Cutting Edge

Multi cutting edge design achieve high efficiency machining.

Irregular pitch design prevents chattering.


3-flute End Cutting Edge

A wide flute improves chip evacuation.

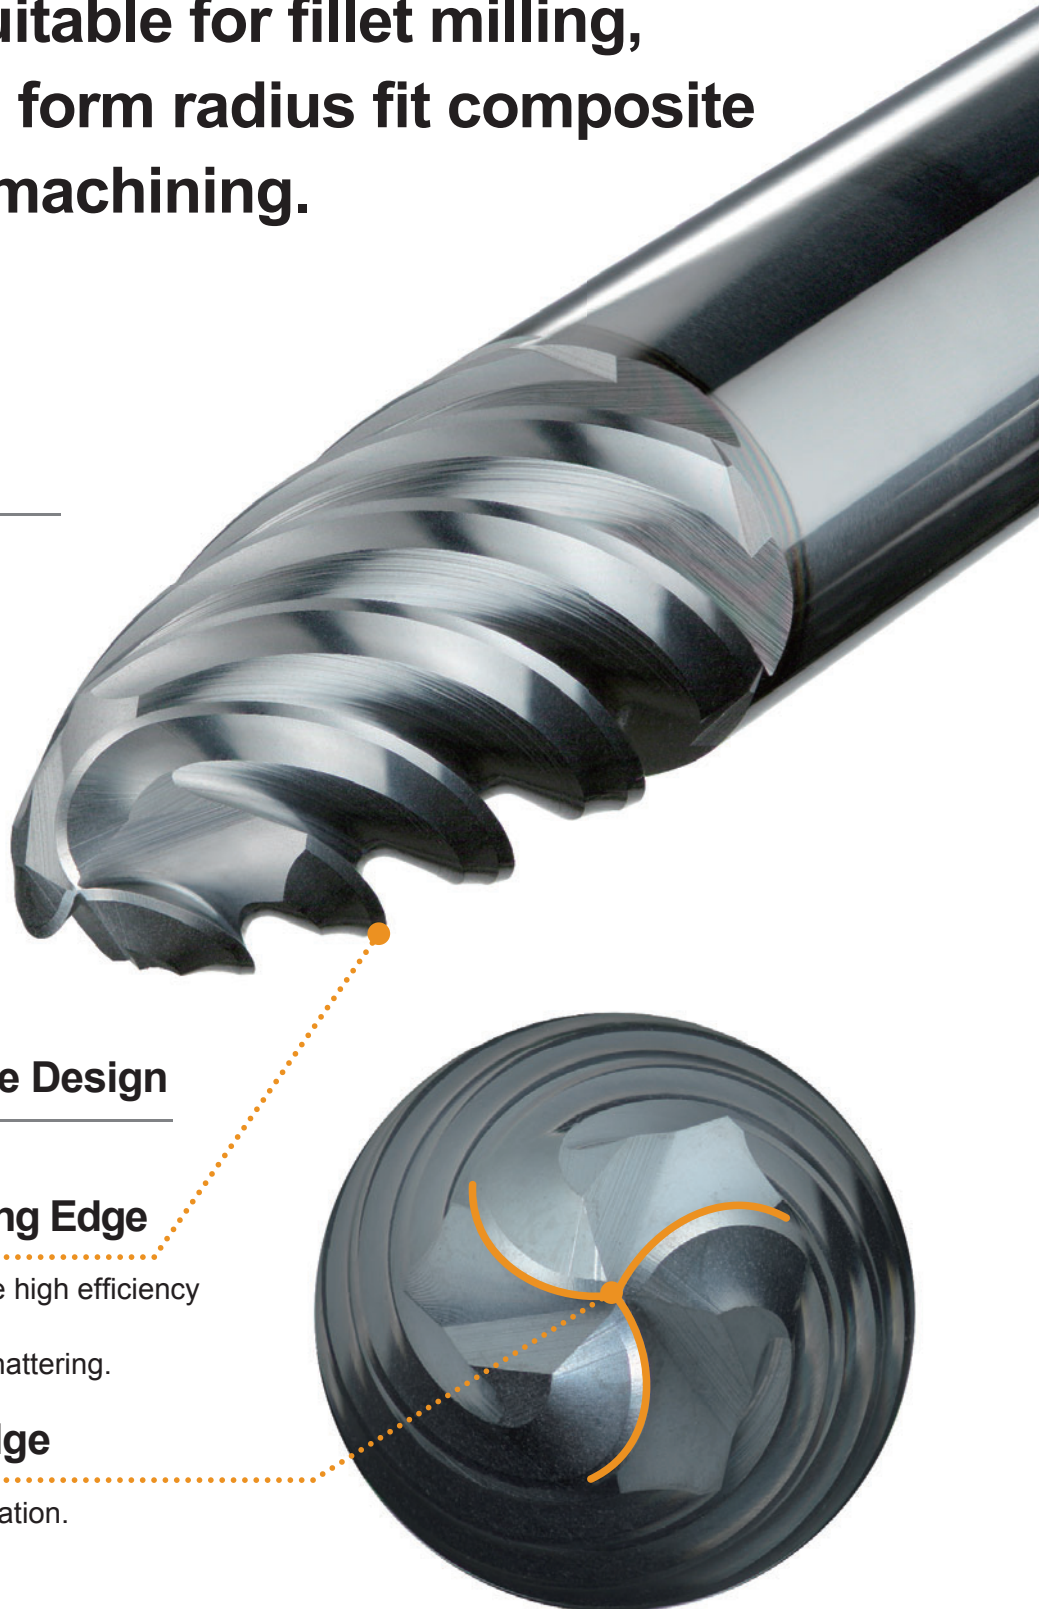

Ideal Shape

Compared with ball nose end mill, an tangential form radius is larger and cusp height is controllable. This design makes highly efficient machining with larger pick feed.

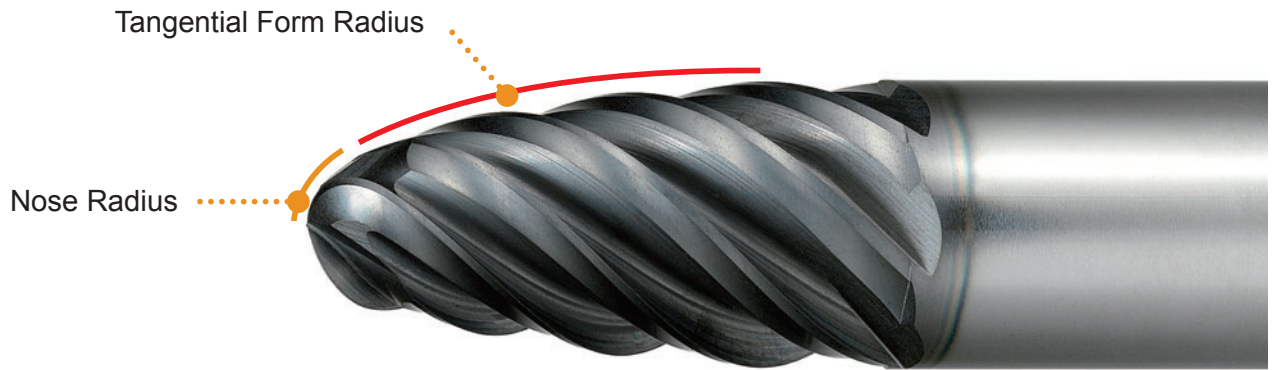


Nose and tangential form part has two different radius.



Shorter cutting distance contribute to longer tool life.

Comparison of Machining Time by CAM Simulation

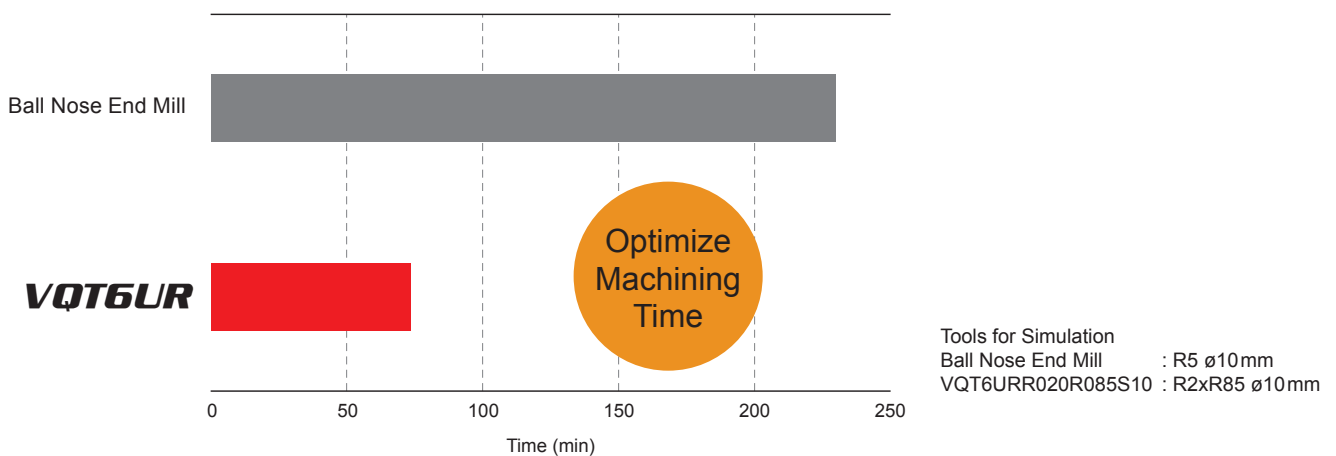


Barrel End Mill for Finish Cutting of Titanium Alloys

VQT6UR

Barrel, Medium cut length, 6 flute



Carbon Steel, Alloy Steel, Cast Iron (≤30HRC)	Tool Steel, Pre-hardened Steel, Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy	Copper Alloy	Aluminum Alloy
○				○	◎		○

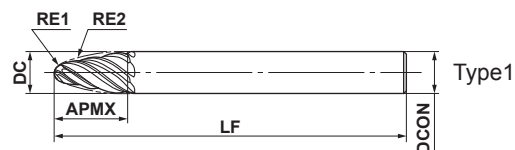

R	RE1 ≤ 4	RE2 ≤ 100			
	±0.01	±0.01			
h6	DCON ≤ 10	DCON = 12			
	0 - 0.009	0 - 0.011			

- Nose and tangential form part has two different radius.
- Irregular pitch design prevents chattering.

(mm)									
Order Number	DC	RE1	RE2	APMX	LF	DCON	No.F [*]	Stock	Type
VQT6URR020R075S08	8	2	75	21	90	8	6	●	1
VQT6URR020R085S10	10	2	85	26	100	10	6	●	1
VQT6URR030R075S10	10	3	75	22	100	10	6	●	1
VQT6URR040R100S12	12	4	100	25	110	12	6	●	1

(Note 1) SMART MIRACLE coating has very low electrical conductivity; therefore, an external contact type of tool setter (electric transmitted) may not work.

When measuring the tool length, please use an internal contact type (non-electricity type) or a laser tool setter.

* Number of Flutes

DC = Dia. **APMX** = Length of Cut
RE1 = Nose Radius **LF** = Overall Length
RE2 = Tangential Form Radius **DCON** = Shank Dia.


● : Inventory maintained in Japan.

Recommended Cutting Conditions

Effective Angle

Please refer to the table below for the use of the nose radius (RE1) and tangential form radius (RE2).

Order Number	(mm)			
	Nose Radius		Tangential Form Radius	
	RE1	Effective Angle	RE2	Effective Angle
VQT6URR020R075S08	2	76.6°	75	13.4°
VQT6URR020R085S10	2	74.5°	85	15.5°
VQT6URR030R075S10	3	76.4°	75	13.6°
VQT6URR040R100S12	4	78.3°	100	11.7°



Side Milling with the Use of the Tangential Form Radius (RE2)


Work Material		(mm)											
		Mild Steels ($\leq 180\text{HB}$) Carbon Steels, Cast Irons ($180-280\text{HB}$)				Austenitic Stainless Steels ($\leq 200\text{HB}$) Titanium Alloys				Aluminum Alloys ($\text{Si} < 5\%$)			
DC	RE2	n (min^{-1})	vf (mm/min)	ae	ap	n (min^{-1})	vf (mm/min)	ae	ap	n (min^{-1})	vf (mm/min)	ae	ap
8	75	8000	2400	0.78	0.05-0.3	3200	770	0.78	0.05-0.3	16000	4800	0.78	0.05-0.3
10	85	6400	1900	0.83	0.05-0.3	2500	600	0.83	0.05-0.3	13000	3900	0.83	0.05-0.3
10	75	6400	1900	0.78	0.05-0.3	2500	600	0.78	0.05-0.3	13000	3900	0.78	0.05-0.3
12	100	5300	1600	0.89	0.05-0.3	2100	500	0.89	0.05-0.3	11000	3300	0.89	0.05-0.3

(Note 1) SMART MIRACLE coating has very low electrical conductivity; therefore, an external contact type of tool setter (electric transmitted) may not work.

When measuring the tool length, please use an internal contact type (non-electricity type) or a laser tool setter.

(Note 2) It is recommended to use this tool only for finish cutting.

(Note 3) The tool contact part differs between the nose radius and tangential form radius depending on machining geometries and tilt angles. Select suitable cutting conditions according to tool contact parts.

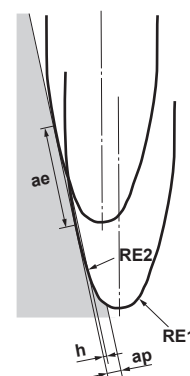

Depth of Cut Calculation Table Based on Tangential Form Radius (RE2) and Cusp Height (h)

Work Material		RE2	Cusp Height h	(mm)						
				0.0001	0.0003	0.0005	0.0008	0.001	0.003	0.005
VQT6URR020R075S08	75	Depth of Cut ae		0.245	0.424	0.548	0.693	0.775	1.342	1.732
VQT6URR030R075S10	75			0.245	0.424	0.548	0.693	0.775	1.342	1.732
VQT6URR020R085S10	85			0.261	0.452	0.583	0.738	0.825	1.428	1.844
VQT6URR040R100S12	100			0.283	0.49	0.632	0.8	0.894	1.549	2

Barrel End Mill for Finish Cutting of Titanium Alloys

Recommended Cutting Conditions

Slot Milling with the Use of the Nose Radius (RE1)


Work Material		Mild Steels ($\leq 180\text{HB}$) Carbon Steels, Cast Irons (180—280HB)				Austenitic Stainless Steels ($\leq 200\text{HB}$) Titanium Alloys				Aluminum Alloys (Si < 5%)			
		n (min^{-1})	vf (mm/min)	ap	ae	n (min^{-1})	vf (mm/min)	ap	ae	n (min^{-1})	vf (mm/min)	ap	ae
8	2	16000	2400	0.4	1	6400	580	0.4	1	32000	4800	0.4	1
10	2	16000	2400	0.4	1	6400	580	0.4	1	32000	4800	0.4	1
10	3	11000	1700	0.6	1.5	4200	380	0.6	1.5	21000	3200	0.6	1.5
12	4	8000	1200	0.8	2	3200	290	0.8	2	16000	2400	0.8	2

(Note 1) SMART MIRACLE coating has very low electrical conductivity; therefore, an external contact type of tool setter (electric transmitted) may not work.

When measuring the tool length, please use an internal contact type (non-electricity type) or a laser tool setter.

(Note 2) It is recommended to use this tool only for finish cutting.

(Note 3) The tool contact part differs between the nose radius and tangential form radius depending on machining geometries and tilt angles. Select suitable cutting conditions according to tool contact parts.



Cutting Performance


Slot Milling of Titanium Alloy

Provided good surface finishes and there was no chipping on the cutting edge.

VQT6UR



Conventional



Surface

Cutting Edge




<Cutting Conditions>

Workpiece : Ti-6Al-4V
Tool : VQT6URR020R085S10
Cutting Speed : $vc=80\text{ m/min}$
Revolution : $n=6770\text{ min}^{-1}$
Feed per Tooth : $fz=0.03\text{ mm/t}$
Depth of Cut : $ap=1.0\text{ mm}$
Cutting Mode : External Coolant (Emulsion)
Machine : 5-axis MC (HSK63)

Cutting Performance


Deep Wall Machining of Titanium Alloy

High efficiency machining is possible while maintaining quality of machined surface.

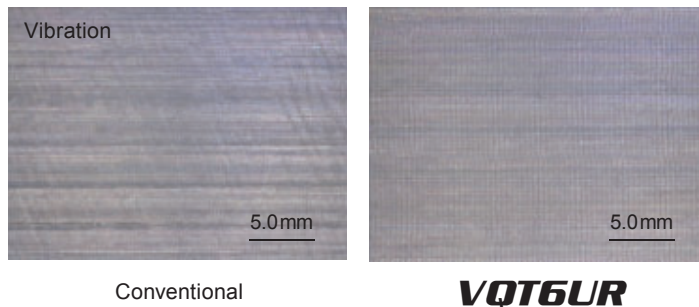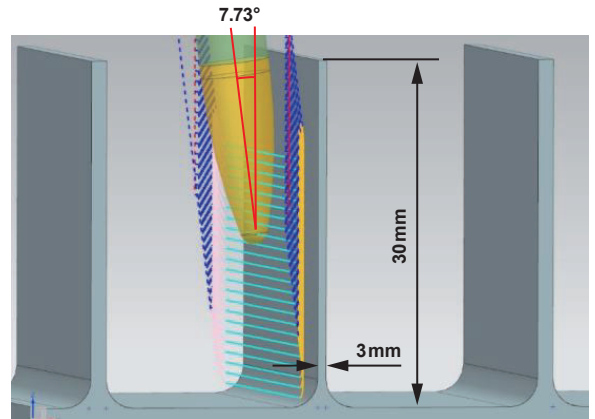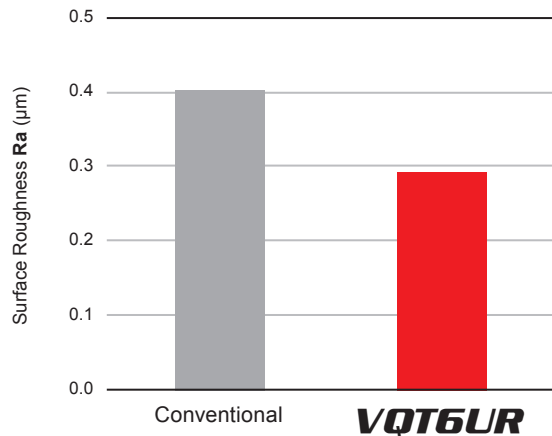

<Cutting Conditions>
 Workpiece : Ti-6Al-4V
 Tool : VQT6URR020R085S10
 Revolution : $n=2546 \text{ min}^{-1}$
 Feed per Tooth : $fz=0.03 \text{ mm/t.}$
 Depth of Cut : $ae=1.5 \text{ mm}$
 Width of Cut : $ap=0.3 \text{ mm}$
 Tilt Angle : 7.73°
 Cutting Mode : Side Milling
 External Coolant (Emulsion)
 Machine : 5-axis MC (HSK63)


Comparison of Tool Life in Titanium Alloy

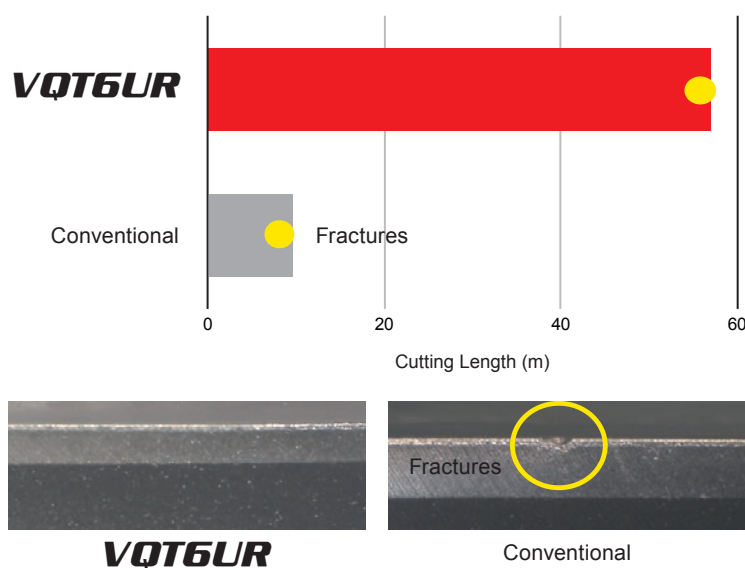

<Cutting Conditions>
 Workpiece : Ti-6Al-4V
 Tool : VQT6URR020R085S10
 Revolution : $n=2546 \text{ min}^{-1}$
 Feed per Tooth : $fz=0.03 \text{ mm/t.}$
 Depth of Cut : $ae=4.0 \text{ mm}$
 Width of Cut : $ap=0.3 \text{ mm}$
 Tilt Angle : 8°
 Overhang Length : 40mm
 Cutting Mode : External Coolant (Emulsion)
 Machine : 5-axis MC (HSK63)

Machining Example



Blade Surface Machining



<Cutting Conditions>

Workpiece : Ti-6Al-4V
Tool : VQT6URR020R085S10
Cutting Speed : $vc=120$ m/min
Feed per Rev. : $vf=920$ mm/min
Depth of Cut : $ae=1.42$ mm
Width of Cut : $ap=0.2$ mm
Tilt Angle : 10°
Cutting Mode : External Coolant (Emulsion)
Machine : 5-axis MC (HSK63)

Fillet Milling



<Cutting Conditions>

Workpiece : Ti-6Al-4V
Tool : VQT6URR020R085S10
Cutting Speed : $vc=80$ m/min
Feed per Rev. : $vf=760$ mm/min.
Depth of Cut : $ap=0.218$ mm
Width of Cut : $ae=0.2$ mm
Tilt Angle : 20°
Cutting Mode : External Coolant (Emulsion)
Machine : 5-axis MC (HSK63)

For Your Safety

●Don't handle inserts and chips without gloves. ●Please machine within the recommended application range and exchange expired tools with new ones in advance of breakage. ●Please use safety covers and wear safety glasses. ●When using compounded cutting oils, please take fire precautions. ●When attaching inserts or spare parts, please use only the correct wrench or driver. ●When using rotating tools, please make a trial run to check run-out, vibration and abnormal sounds etc.

MITSUBISHI MATERIALS CORPORATION

MMC HARDMETAL INDIA PVT LTD

Head Office

Prasad Enclave, #118/119, 1st Floor, 2nd Stage BBMP Ward #11,
(New #38), Industrial Suburb, Yeshwanthpura, Bengaluru-560 022
Karnataka, India, Tel : +91 80 2204 3600
E-mail : mb-mmci@mmc.co.jp

REGIONAL OFFICES

Pune Office

Plot No, A-27 & A-28, H-Block,
Pimpri Waghere, Pimpri Industrial Area MIDC,
Pune - 411018, Maharashtra, India
Tel :: +91 020-27456959

Gurugram Office

#407, 4th Floor, JMD Galleria, Sohna Road,
Opposite Malibu Town, Sector-48,
Gurgaon-122 001 Haryana, India.
Tel : +91 124 4089163

Chennai Office

MM Complex, 2nd Floor, Part 30/10 Hopman 2nd
Street, 100 Feet Main Road, Alandur,
Chennai - 600 016 Tamilnadu, India.
Tel: +91 44 4550 7006

Ahmedabad Office

210, Sigma Arcade, 2nd Floor, Visat Circle,
Ahmedabad-Mehsana Road, Chandkheda,
Ahmedabad - 382 424, Gujarat, India.
Tel : +91 79 2329 9300

<http://www.mitsubishicarbide.com/en/>

(Tools specifications subject to change without notice.)