

For Machining Titanium Alloys

ASPX

Item
Addition

Vibration Control Provides High Efficiency

Integrated HSK holder type added for higher rigidity and is ideal for larger depths of cut.



YouTube


For Machining Titanium Alloys

ASPX

**Vibration Control Features + Low Cutting Resistance
Gives Stable, High-efficiency Cutting**


Suppression of Regenerative Chatter

ASPX leads the latest machining theory by adopting irregular flutes and optimally placed inserts to drastically reduce vibration.

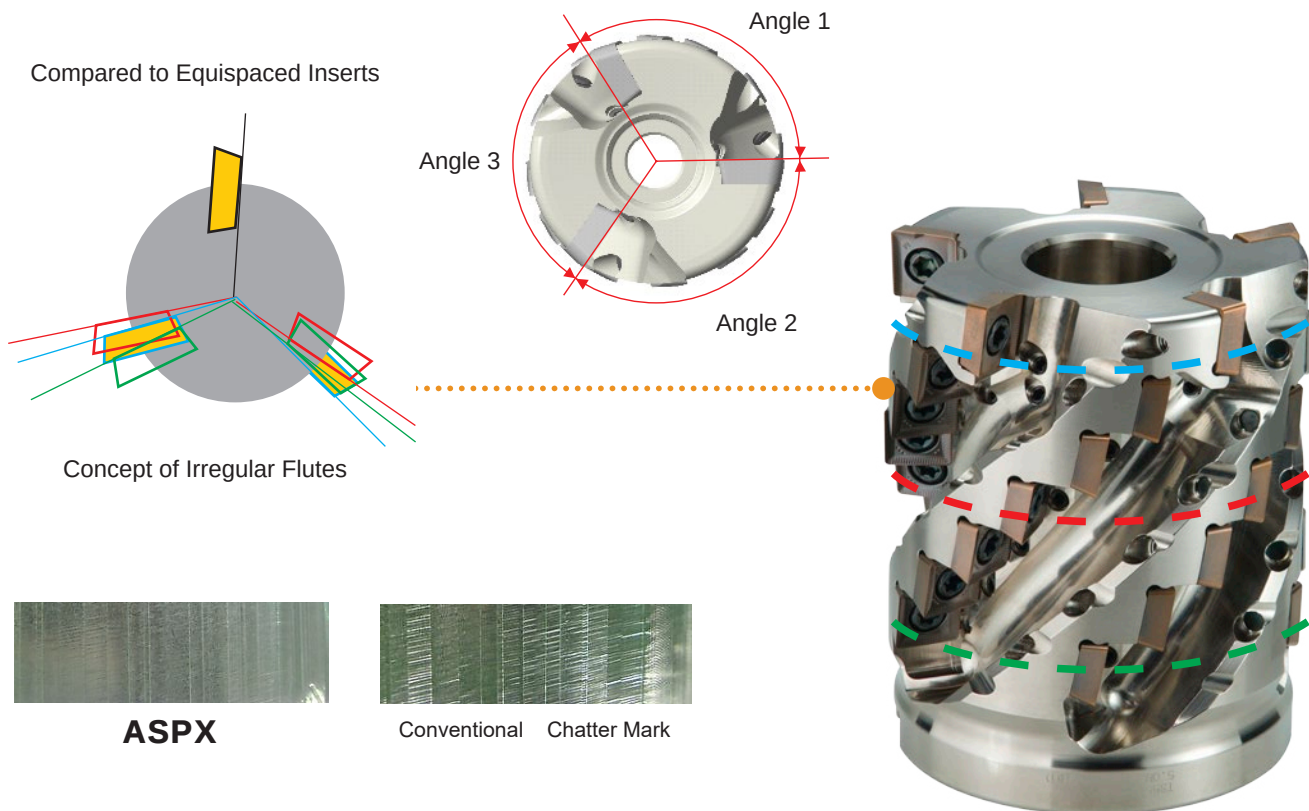

Improvement of Chip Discharge

Coolant applied at the rake face of the cutting edge enables highly efficient chip discharge.

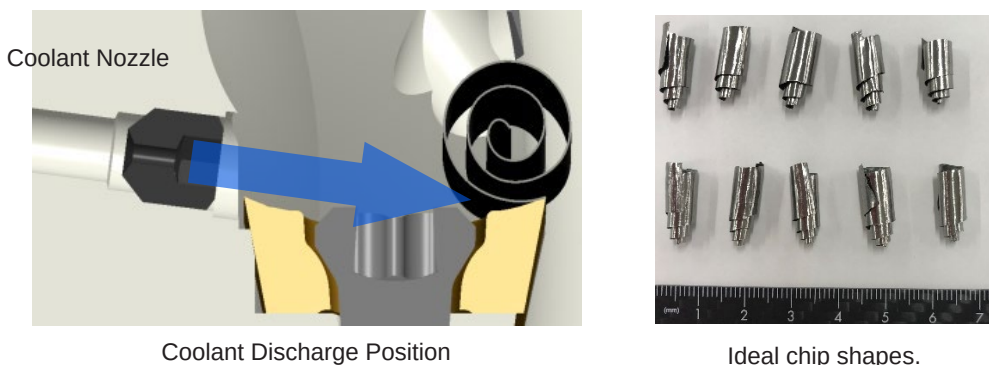

Reduced Cutting Resistance



A large rake angle and honing (edge preparation ideal for titanium machining) enhances the low cutting resistance and provides high fracture resistance.



Bottom Edge Insert



Peripheral Edge Insert

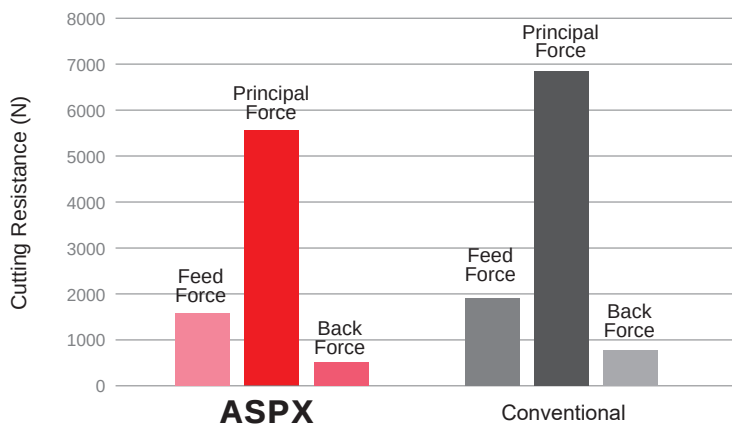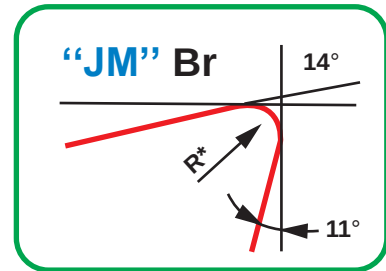


<Cutting Conditions>
 Workpiece Material : Ti-6Al-4V
 Cutter Dia. : $\phi 80$ mm
 Cutting Speed : $v_c = 60$ m/min
 Feed per Tooth : $f_z = 0.15$ mm/t.
 Depth of Cut : $a_p = 30$ mm
 Width of Cut : $a_e = 23.3$ mm
 Cutting Mode : Single Flute

PVD Coated Grade for Difficult-to-cut Materials

MP9140

Combination of a cemented carbide material with outstanding fracture resistance, and a smooth coating with excellent welding resistance, provides stable processing with long tool life.



Smooth surface provides excellent welding resistance.

The high Al-rich AlTiN coating succeeds in dramatically improving wear and heat resistance.

Special cemented carbide substrate with improved fracture resistance.

For Machining Titanium Alloys

DEEP SHOULDER MILLING

<CUTTING FOR TITANIUM ALLOY>



ASPX

P


M

K

N

S

H

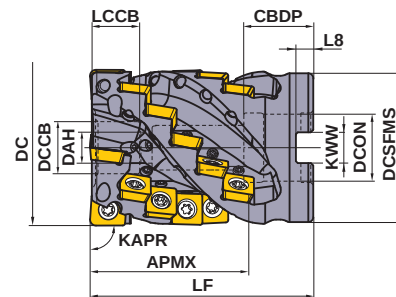

Right hand tool holder only.

Shell Type

KAPR: 90°

With Coolant Hole : Shell type should be combined with a through coolant arbor.

Cutter Diameter DC	Set Bolt	Geometry
φ50	HSC10070	
φ63	HSC12070	
φ80	HSC16080	

DC	Order Number	Stock	Number of Flutes	Total	LF	DCON	WT (kg)	APMX
		R						
50	ASPX4-050A03A054RA15	●	3	15	85	22	0.6	54
63	ASPX4-063A04A064RA24	●	4	24	90	27	1.0	64
80	ASPX4-080A05A075RA35	●	5	35	100	32	2.0	75

Mounting Dimensions

DC	Order Number	DCON	CBDP	DAH	DCCB	LCCB	DCSFMS	KWW	L8
50	ASPX4-050A03A054RA15	22	21	10.5	17	14	47	10.4	6.3
63	ASPX4-063A04A064RA24	27	28	12.5	21	19	60	12.4	7
80	ASPX4-080A05A075RA35	32	28	16.5	27	20	76	14.4	8

Spare Parts

Tool Holder Type	 *						Number of Insert	
	Clamp Screw	Seal Washer	Wrench	Coolant Nozzle	Number	Anti-seize Lubricant	JPGX	SPGX
ASPX4-050A	TS55	W10-S1	TKY25D	HSD04004H08	18	MK1KS	3	12
ASPX4-063A	TS55	W12-S1	TKY25D	HSD04004H08	28	MK1KS	4	20
ASPX4-080A	TS55	W16-S1	TKY25D	HSD04004H08	40	MK1KS	5	30

★ Clamp Torque (N • m) : TS55 = 5.0


	≤1Mpa (≤20 l/min.)	←Standard→	≥5Mpa (≥30 l/min.)	≥7Mpa (≥50 l/min.)	To Plug a Coolant Hole
Nozzle Dia.	ø0.6mm	ø0.8mm	ø1.2mm	ø1.6mm	—
Order Number	HSD04004H06	HSD04004H08	HSD04004H12	HSD04004H16	HSS04004

Note 1) Coolant nozzles are available with varying diameters for adjusting coolant pressure.

Select the correct nozzle according to the specification.

Note 2) Use HSS04004 (JIS B 1177 flat point M4x4, clamp torque 1.5 Nm) to plug the coolant hole.

● : Inventory maintained in Japan. (10 inserts in one case)

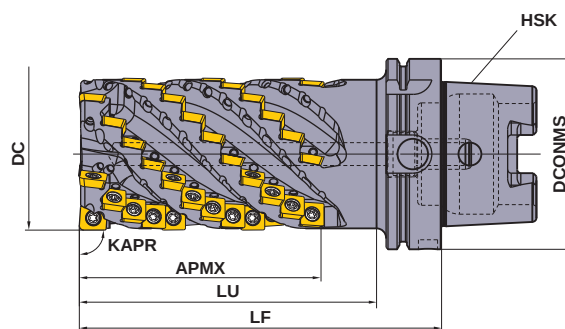

The standard type is right-handed (R) only.
The HSK shank type has a built-in movable coolant pipe for installation.

NEW

■ HSK Shank Type

KAPR: 90°
With Coolant Hole

(mm)									
DC	Order Number	Stock R	Number of Flutes	Total	LF	LU	DCONMS	HSK	APMX
80	ASPX4R0805H100A127SA	●	5	60	190	156	100	HSK-A100	127
80	ASPX4R0805H125A127SA	●	5	60	190	156	125	HSK-A125	127

● = **NEW**

Spare Parts

Tool Holder Type	*			Number		Number of Insert	
	Clamp Screw	Wrench	Coolant Nozzle		Anti-seize Lubricant	JPGX	SPGX
ASPX4R0805H100A	TS55	TKY25D	HSD04004H08	65	MK1KS	5	55
ASPX4R0805H125A	TS55	TKY25D	HSD04004H08	65	MK1KS	5	55

★ Clamp Torque (N • m) : TS55 = 5.0

Cutting Example

Titanium Alloy Ti-6Al-4V : Ultra-high Efficiency Machining Example

Compared to a conventional tool productivity has been improved by 130% and the tool life has been doubled.

Conventional

M.R.R. 264cm³/min

Cutting time 50 min / workpiece

Cutting Speed : vc=55m/min
Feed per Tooth : fz=0.12mm/t.
Depth of Cut : ap=80mm
Width of Cut : ae=25mm




Tool : Integrated Type HSK-A100

M.R.R. 360cm³/min

Cutting time 35 min / workpiece



Cutting Speed : vc=75m/min
Feed per Tooth : fz=0.12mm/t.
Depth of Cut : ap=80mm
Width of Cut : ae=25mm

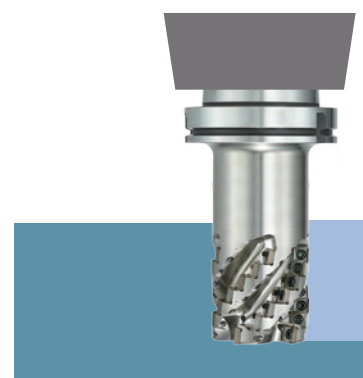

For Machining Titanium Alloys

Inserts

(mm)

Workpiece Material		S		Heat-resistant Alloy, Titanium Alloy		C						Cutting Conditions (Guide) :					
												● : Stable Cutting ● : General Cutting ✖ : Unstable Cutting Edge Preparation : E : Round					
Shape		Order Number		Class	Edge Preparation	Coated		L	LE	W1	IC	S	RE	Geometry			
						MP9140											
Bottom		JPGX1404080PPER-JM	G	E	●				15.12	13.4	12.7	—	4.8	0.8			
		JPGX1404120PPER-JM	G	E	●				15.06	13.3	12.7	—	4.8	1.2			
		JPGX1404160PPER-JM	G	E	●				15.00	13.3	12.7	—	4.8	1.6			
		JPGX1404240PPER-JM	G	E	●				14.88	13.2	12.7	—	4.8	2.4			
		JPGX1404320PPER-JM	G	E	●				14.72	13.1	12.7	—	4.8	3.2			
		JPGX1404400PPER-JM	G	E	●				14.64	13.0	12.7	—	4.8	4.0			
		JPGX1404500PPER-JM	G	E	●				14.49	13.0	12.7	—	4.8	5.0			
		JPGX1404635PPER-JM	G	E	●				14.29	12.9	12.7	—	4.8	6.35			
Peripheral		SPGX1204100PPER-JM	G	E	●				—	—	—	12.7	4.8	1.0			

Cutting Performance

High-efficiency Machining of Ti-6Al-4V

Machined surfaces free of chatter marks can be realised to ensure no effects on the finish machining process.



<Cutting Conditions for Shoulder Milling>
 Workpiece Material : Ti-6Al-4V
 Cutter Dia. : DC=50 mm
 Cutting Speed : $vc=40$ m/min
 Feed per Tooth : $fz=0.13$ mm/t.
 Depth of Cut : $ap=60$ mm
 Width of Cut : $ae=15$ mm
 Cutting Mode : Wet Cutting M.R.R. $90\text{cm}^3/\text{min}$









<Cutting Conditions for Grooving>
 Workpiece Material : Ti-6Al-4V
 Cutter Dia. : DC=50 mm
 Cutting Speed : $vc=40$ m/min
 Feed per Tooth : $fz=0.08$ mm/t.
 Depth of Cut : $ap=30$ mm
 Width of Cut : $ae=50$ mm
 Cutting Mode : Wet Cutting M.R.R. $92\text{cm}^3/\text{min}$

How to Use

Positive Effects of a Roll Into Cutting Approach

The roll into cutting approach can control sharp increases in cutting loads and prevent sudden chipping of inserts which is likely to occur at the start of machining.

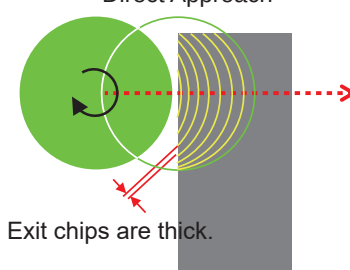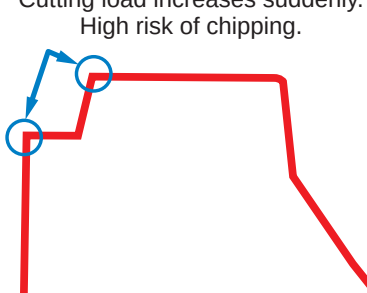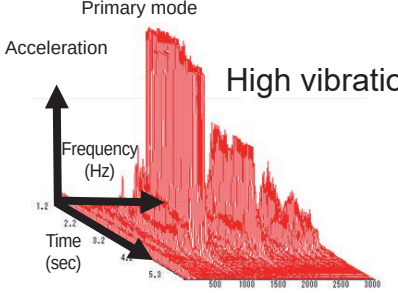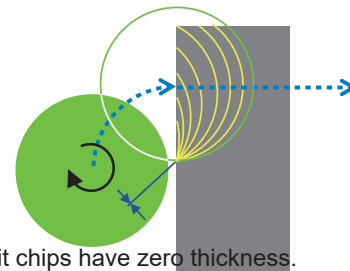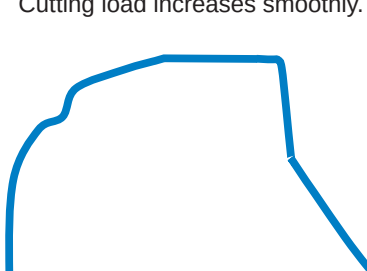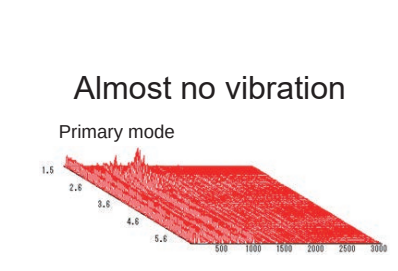Approach Method	Cutting Load Simulation	Image of Cutting Vibration Frequency
Direct Approach  Exit chips are thick.	Cutting load increases suddenly. High risk of chipping. 	Primary mode Acceleration High vibration 
Roll Into Cutting Approach  Exit chips have zero thickness.	Cutting load increases smoothly. 	Almost no vibration Primary mode 

Down cutting (climb milling) is recommended.

Use of Inserts with Large Corner Radii

When using inserts with corner radius $RE \geq R3.2\text{mm}$, please machine the cutter body with a radius form as shown in the table below.



Insert Corner R RE	Cutter Body Radius R
3.2	3.0
4.0	4.0
5.0	5.0
6.35	6.2

For Your Safety

●Don't handle inserts and chips without gloves. ●Please machine within the recommended application range and exchange expired tools with new ones in advance of breakage. ●Please use safety covers and wear safety glasses. ●When using compounded cutting oils, please take fire precautions. ●When attaching inserts or spare parts, please use only the correct wrench or driver. ●When using rotating tools, please make a trial run to check run-out, vibration and abnormal sounds etc.

MITSUBISHI MATERIALS CORPORATION

MMC HARDMETAL INDIA PVT LTD

Head Office

Prasad Enclave, #118/119, 1st Floor, 2nd Stage BBMP Ward #11,
(New #38), Industrial Suburb, Yeshwanthpura, Bengaluru-560 022
Karnataka, India, Tel : +91 80 2204 3600
E-mail : mb-mmci@mmc.co.jp

REGIONAL OFFICES:

Pune Office

Plot No, A-27 & A-28, H-Block,
Pimpri Waghere, Pimpri Industrial Area MIDC,
Pune - 411018, Maharashtra, India
Tel :: +91 020-27456959

Gurgaon Office

#407, 4th Floor, JMD Galleria, Sohna Road,
Opposite Malibu Town, Sector-48,
Gurgaon-122 001 Haryana, India.
Tel : +91 124 4089163

Chennai Office

MM Complex, 2nd Floor, Part 30/10 Hopman 2nd Street,
100 Feet Main Road, Alandur,
Chennai - 600 016 Tamilnadu, India.
Tel: +91 44 4550 7006

Ahmedabad Office

210, Sigma Arcade, 2nd Floor, Visat Circle,
Ahmedabad-Mehsana Road, Chandkheda,
Ahmedabad - 382 424, Gujarat, India.
Tel : +91 79 2329 9300

<http://www.mitsubishicarbide.com/en/>
(Tools specifications subject to change without notice.)