


Diamond Coated End Mills for Graphite

DF end mill series

Item
Expansion

High performance graphite milling.

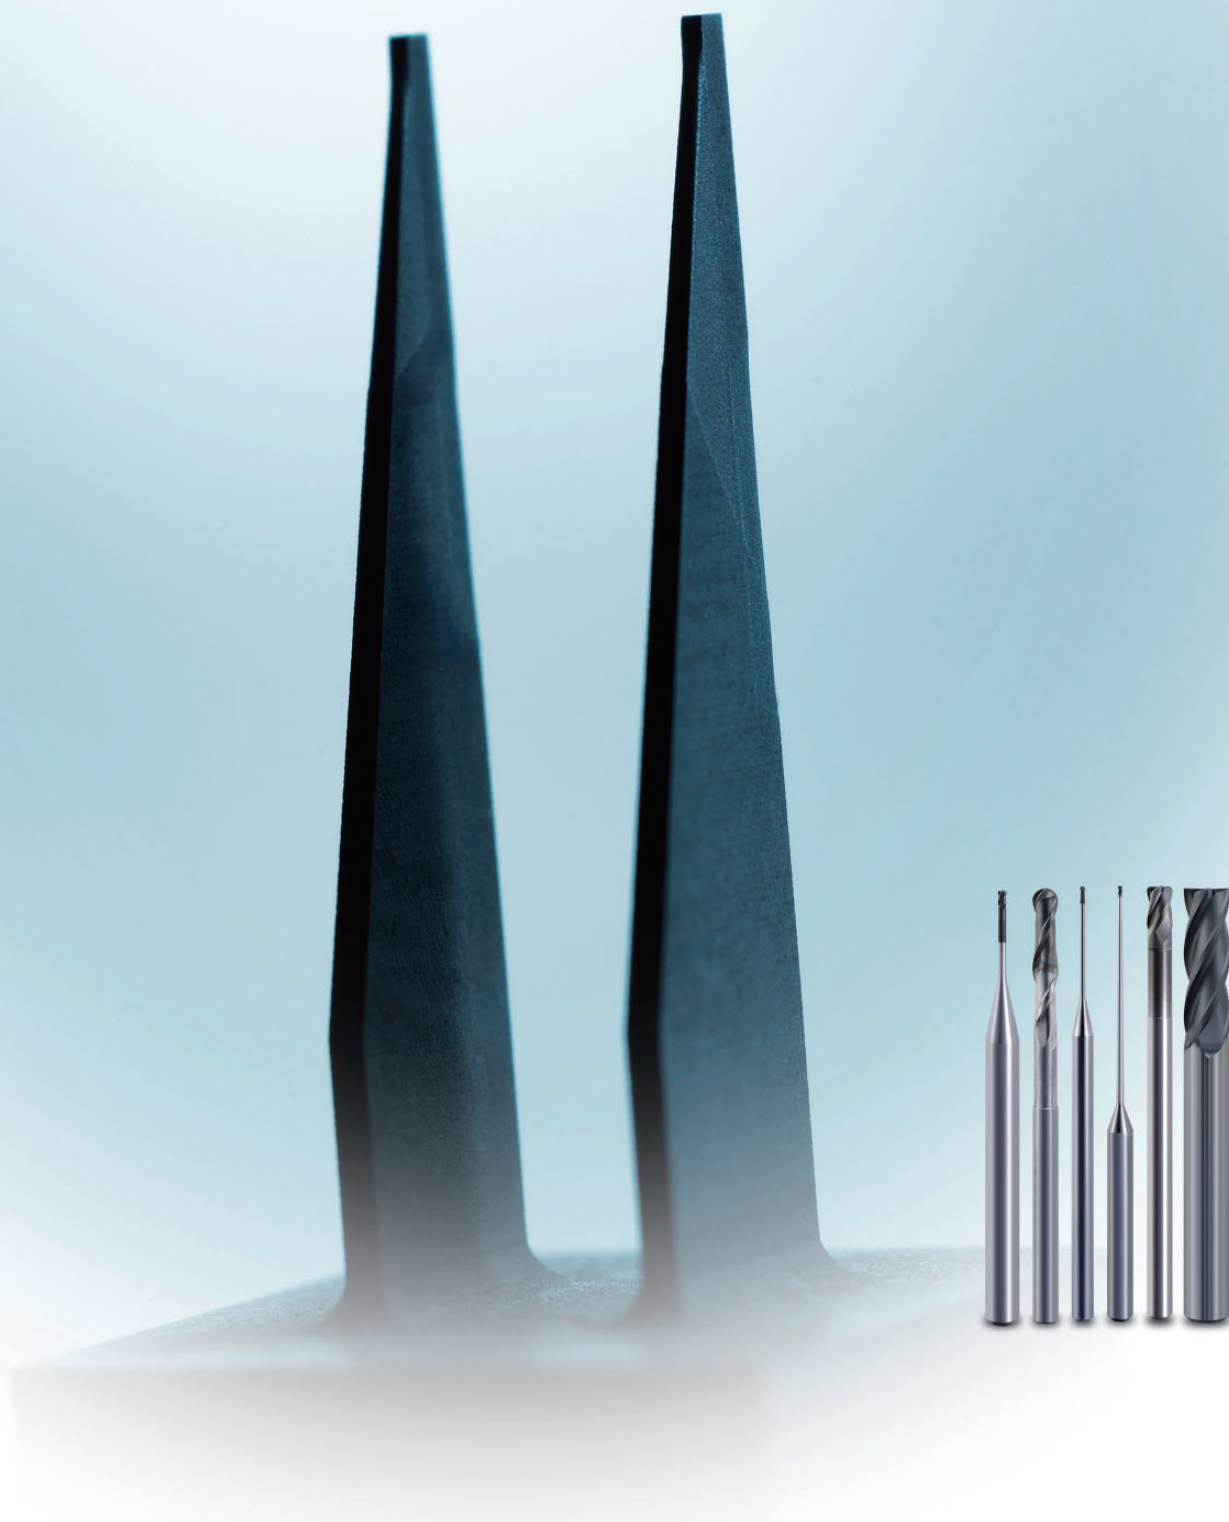

Diamond Coated End Mills for Graphite


DF end mill series



Crystallized Diamond Coating

Diamond coating is affixed to substrate ensuring long tool life and preventing peeling.

Raman Spectroscopy


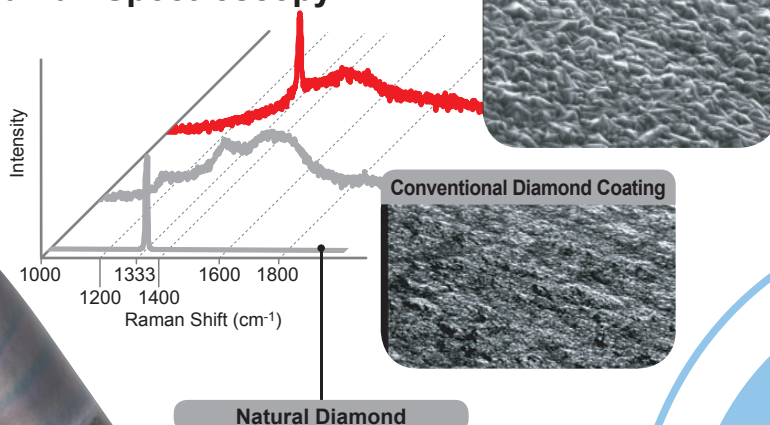


Fixed Crystallized Diamond Structure

Fast, Long Life Diamond Coating


Excellent wear resistance compared to conventional end mills!

Cutting Performance (DFPSRB)

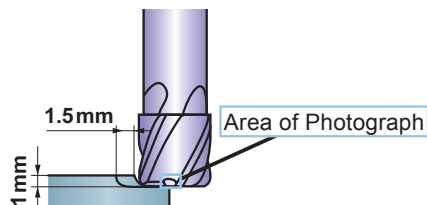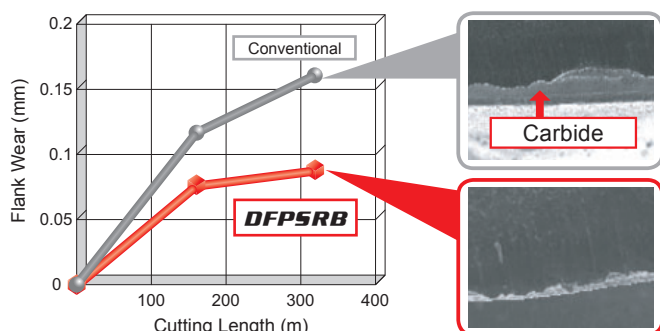


End Mill	DFPSRBD0600R100N30 (ø6mm)
Work Material	Graphite (ISO-63)
Revolution	20000 min ⁻¹ (377 m/min)
Feed Rate	2500 mm/min (0.03 mm/t.)
Cutting Mode	Dry Cutting

Cutting Performance (DF2MB)

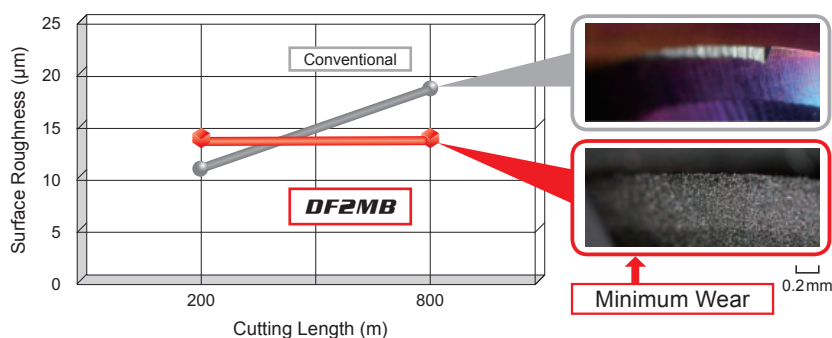

Area of Photograph

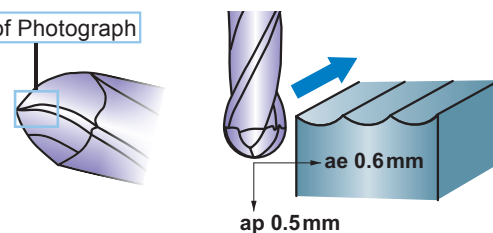

End Mill	DF2MBR0300A100 (ø3mm)
Work Material	Copper
Revolution	13000 min ⁻¹ (135 m/min)
Feed Rate	1300 mm/min (0.05 mm/t.)
Cutting Mode	Wet Cutting

Water-soluble cutting fluid is recommended for milling copper alloys.


Fixed

D




Fast

The seamless blend between corner radius and peripheral cutting edge ensures a good surface finish.

DF2MB

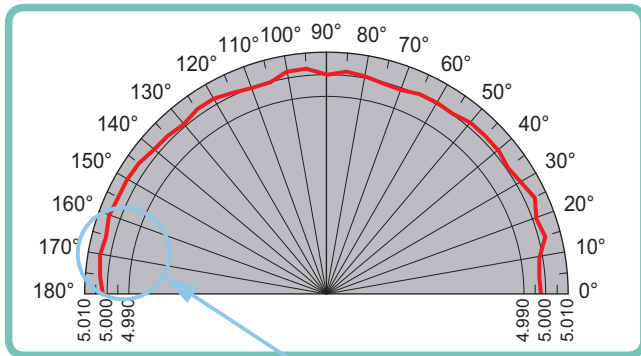

Conventional

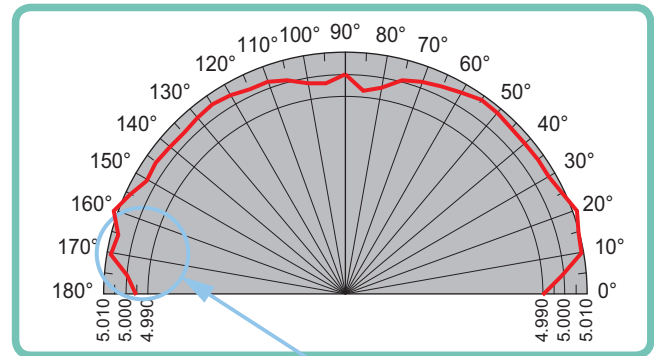

Fine Seamless Geometry

First Choice for Graphite Machining

DF2MB

Ball nose, Medium cut length, 2 flute, For graphite

R3×100–R6×200mm

12 different sizes available

DF4JC

End mill, Semi long cut length, 4 flute, For graphite

ø3–ø12mm

6 different sizes available

DF2XLB

Expansion

Ball nose, 2 flute, Long neck, For graphite

R0.1×0.5–R3×12mm

54 different sizes available

DF3XB

Ball nose, 3 flute, Taper neck, For graphite

R0.5×0.5°×30–R2×0.5°×100mm

9 different sizes available

DF4XL

End mill, Long neck, 4 flute, For graphite

ø1×6–ø12×30mm

17 different sizes available

DFPSRB

Corner radius end mill, Short cut length, 2-4 flute, High precision, For graphite

ø0.5×R0.1×4–ø12×R0.5×40mm

41 different sizes available




Diamond Coated End Mills for Graphite

DF4JC

End mill, Semi long cut length, 4 flute, For graphite



Aluminum Alloy	Copper Alloy	Graphite	GFRP CFRP	Machineable Ceramics
○	◎	◎	○	○

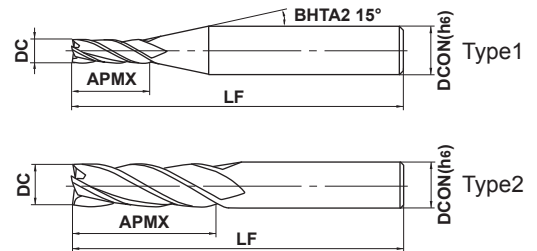

	$3 \leq DC \leq 12$				
	$\begin{matrix} 0 \\ -0.02 \end{matrix}$				
$h6$	$DCON=6$	$8 \leq DCON \leq 10$	$DCON=12$		
	$\begin{matrix} 0 \\ -0.008 \end{matrix}$	$\begin{matrix} 0 \\ -0.009 \end{matrix}$	$\begin{matrix} 0 \\ -0.011 \end{matrix}$		

● 4 flute end mill with original diamond coating for graphite machining.

Order Number	DC	APMX	LF	DCON	No.F*	Stock	Type
DF4JCD0300	3	12	60	6	4	●	1
DF4JCD0400	4	16	60	6	4	●	1
DF4JCD0600	6	24	60	6	4	●	2
DF4JCD0800	8	28	70	8	4	●	2
DF4JCD1000	10	35	90	10	4	●	2
DF4JCD1200	12	36	110	12	4	●	2

* Number of Flutes


DC = Dia.

LF = Overall Length

APMX = Length of Cut

DCON = Shank Dia.

Recommended Cutting Conditions

Work material	Graphite				Copper, Copper alloys			
	DC	n (min ⁻¹)	vf (mm/min)	ap ae	n (min ⁻¹)	vf (mm/min)	ap ae	
3	22000	2500	6	0.15	10600	280	6	0.15
4	18000	2900	8	0.2	8000	330	8	0.2
6	14000	3200	12	0.3	6400	380	12	0.3
8	10500	2900	16	0.4	4000	420	16	0.4
10	8700	2600	20	0.5	3200	460	20	0.5
12	7200	2200	24	0.6	2700	460	24	0.6
Depth of cut								

- 1) When high machining accuracy is needed, or workpiece becomes chipped, we recommend lowering feed rate.
- 2) Use a milling machine dedicated for graphite.
- 3) If rigidity of machine or work materials installation is very low, or chattering and noise are generated, reduce revolution and feed rate proportionately.

● : Inventory maintained in Japan.

DF4XL



End mill, Long neck, 4 flute, For graphite



DC<3

DC=3

Aluminum Alloy	Copper Alloy	Graphite	GFRP CFRP	Machineable Ceramics
○	◎	◎	○	○

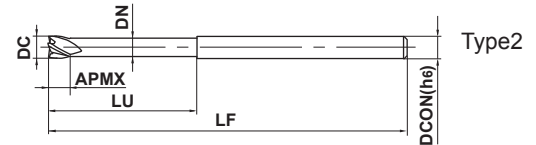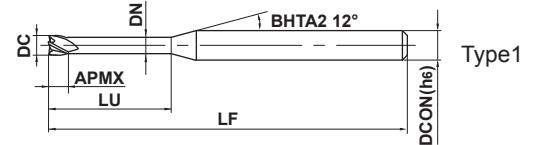

$1 \leq DC \leq 12$				
$\begin{matrix} 0 \\ -0.02 \end{matrix}$				
$4 \leq DCON \leq 6$	$8 \leq DCON \leq 10$	$DCON = 12$		
$\begin{matrix} 0 \\ -0.008 \end{matrix}$	$\begin{matrix} 0 \\ -0.009 \end{matrix}$	$\begin{matrix} 0 \\ -0.011 \end{matrix}$		

● 4 flute long neck end mill with original diamond coating for graphite machining.

(mm)

Order Number	DC	APMX	LU	DN	LF	DCON	No.F*	Stock	Type
DF4XLD0100N060	1	1.5	6	0.94	50	4	4	●	1
DF4XLD0100N080	1	1.5	8	0.94	50	4	4	●	1
DF4XLD0100N100	1	1.5	10	0.94	50	4	4	●	1
DF4XLD0150N100	1.5	2.3	10	1.44	60	4	4	●	1
DF4XLD0150N160	1.5	2.3	16	1.44	60	4	4	●	1
DF4XLD0200N100	2	3	10	1.9	60	4	4	●	1
DF4XLD0200N160	2	3	16	1.9	60	4	4	●	1
DF4XLD0200N200	2	3	20	1.9	60	4	4	●	1
DF4XLD0300N160	3	4.5	16	2.9	70	4	4	●	1
DF4XLD0300N200	3	4.5	20	2.9	70	4	4	●	1
DF4XLD0300N300	3	4.5	30	2.9	70	4	4	●	1
DF4XLD0400N200	4	6	20	3.9	80	4	4	●	2
DF4XLD0400N400	4	6	40	3.9	80	4	4	●	2
DF4XLD0600N300	6	9	30	5.85	70	6	4	●	2
DF4XLD0800N300	8	12	30	7.85	90	8	4	●	2
DF4XLD1000N300	10	15	30	9.7	90	10	4	●	2
DF4XLD1200N300	12	18	30	11.7	110	12	4	●	2

* Number of Flutes

DC = Dia.

APMX = Length of Cut

LU = Neck Length

DN = Neck Dia.

LF = Overall Length

DCON = Shank Dia.

Diamond Coated End Mills for Graphite

DF4XL

End mill, Long neck, 4 flute, For graphite

Recommended Cutting Conditions

Side Milling


(mm)

Work material		Graphite				Copper, Copper alloys			
DC	LU	n (min ⁻¹)	vf (mm/min)	ap	ae	n (min ⁻¹)	vf (mm/min)	ap	ae
1	6	30000	1300	1	0.05	30000	1300	1	0.05
	8	25000	1000	1	0.05	25000	1000	1	0.05
	10	22000	700	1	0.05	22000	700	1	0.05
1.5	10	25000	1200	1.5	0.075	21000	1000	1.5	0.075
	16	18000	800	1.5	0.075	18000	800	1.5	0.075
2	10	22000	1500	2	0.1	16000	1100	2	0.1
	16	19000	1100	2	0.1	16000	930	2	0.1
	20	16000	800	2	0.1	16000	800	2	0.1
3	16	21000	1900	3	0.15	10600	960	3	0.15
	20	18000	1500	3	0.15	10600	890	3	0.15
	30	14000	1000	3	0.15	10600	760	3	0.15
4	20	18000	2400	4	0.4	8000	1100	4	0.4
	40	13000	1500	4	0.4	8000	920	4	0.4
6	30	14000	3200	6	0.6	5300	1200	6	0.6
8	30	10500	2900	8	0.8	4000	1100	8	0.8
10	30	8700	2600	10	1.0	3200	960	10	1.0
12	30	7200	2200	12	1.2	2650	800	12	1.2
Depth of cut		$ae \leq 0.05DC$ ($DC < \phi 4$) $ae \leq 0.1DC$ ($DC \geq \phi 4$) $ap \leq DC$							

- 1) When high machining accuracy is needed, or workpiece becomes chipped, we recommend lowering feed rate.
- 2) Use a milling machine dedicated for graphite.
- 3) If rigidity of machine or work materials installation is very low, or chattering and noise are generated, reduce revolution and feed rate proportionately.

Slotting

(mm)

Work material		Graphite			Copper, Copper alloys		
DC	LU	n (min ⁻¹)	vf (mm/min)	ap	n (min ⁻¹)	vf (mm/min)	ap
1	6	30000	1000	0.1	30000	980	0.1
	8	25000	700	0.08	25000	700	0.08
	10	22000	500	0.06	22000	500	0.06
1.5	10	25000	1100	0.14	21000	750	0.14
	16	18000	600	0.1	18000	600	0.1
2	10	22000	1200	0.2	16000	820	0.2
	16	19000	800	0.16	16000	700	0.16
	20	16000	600	0.12	16000	600	0.12
3	16	21000	1400	0.3	10600	720	0.3
	20	18000	1100	0.25	10600	670	0.25
	30	14000	700	0.2	10600	570	0.2
4	20	18000	1800	0.5	8000	820	0.5
	40	13000	900	0.4	8000	690	0.4
6	30	14000	2300	1.2	5300	900	1.2
8	30	10500	2000	2.0	4000	820	2.0
10	30	8700	1900	3.0	3200	720	3.0
12	30	7200	1700	4.0	2650	600	4.0
Depth of cut							

- 1) When high machining accuracy is needed, or workpiece becomes chipped, we recommend lowering feed rate.
- 2) Use a milling machine dedicated for graphite.
- 3) If rigidity of machine or work materials installation is very low, or chattering and noise are generated, reduce revolution and feed rate proportionately.


Diamond Coated End Mills for Graphite

DF2MB

Ball nose, Medium cut length, 2 flute, For graphite



Aluminum Alloy	Copper Alloy	Graphite	GFRP CFRP	Machineable Ceramics
○	◎	◎	○	○

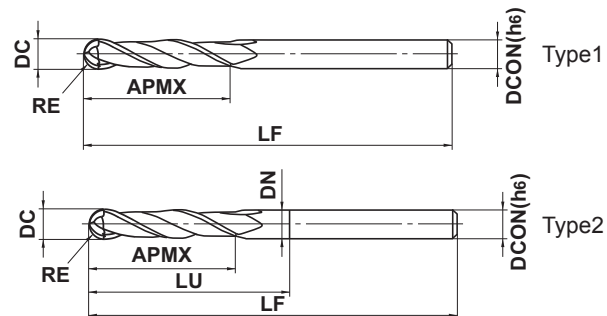

R	3 ≤ RE ≤ 6				
	±0.01				
h6	DCON=6	8 ≤ DCON ≤ 10	DCON=12		
	$\begin{smallmatrix} 0 \\ -0.008 \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -0.009 \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -0.011 \end{smallmatrix}$		

● 2 flute ball nose end mill with original diamond coating for graphite machining.

(mm)										
Order Number	RE	DC	APMX	LU	DN	LF	DCON	* No.F	Stock	Type
DF2MBR0300	3	6	30	—	—	100	6	2	●	1
DF2MBR0300A100	3	6	30	50	5.85	100	6	2	●	2
DF2MBR0300A150	3	6	30	50	5.85	150	6	2	●	2
DF2MBR0300N100A150	3	6	30	100	5.85	150	6	2	●	2
DF2MBR0400A110	4	8	40	60	7.85	110	8	2	●	2
DF2MBR0400A150	4	8	40	60	7.85	150	8	2	●	2
DF2MBR0500A120	5	10	50	70	9.7	120	10	2	●	2
DF2MBR0500A180	5	10	50	70	9.7	180	10	2	●	2
DF2MBR0500N140A180	5	10	50	140	9.7	180	10	2	●	2
DF2MBR0600A130	6	12	55	75	11.7	130	12	2	●	2
DF2MBR0600A200	6	12	55	75	11.7	200	12	2	●	2
DF2MBR0600N150A200	6	12	55	150	11.7	200	12	2	●	2

(Effective Coating Length : DC x 1-1.5)

* Number of Flutes

RE = Radius of Ball Nose
DC = Dia.

APMX = Length of Cut
LU = Neck Length


DN = Neck Dia.
LF = Overall Length

DCON = Shank Dia.

● : Inventory maintained in Japan.

Recommended Cutting Conditions

(mm)

Work material		Graphite				Copper, Copper alloys			
DC	LF	n (min ⁻¹)	vf (mm/min)	ap	ae	n (min ⁻¹)	vf (mm/min)	ap	ae
R3	100	16000	1900	0.6	1.5	16000	1500	0.6	1.5
	150	12000	1200	0.4	1.2	12000	960	0.4	1.2
R4	110	12000	2000	0.8	2.0	12000	1600	0.8	2.0
	150	9200	1400	0.6	1.6	9200	1100	0.6	1.6
R5	120	9500	2200	1.0	2.5	9500	1800	1.0	2.5
	180	7300	1500	0.8	2.0	7300	1200	0.8	2.0
R6	130	8000	1800	1.2	3.0	8000	1400	1.2	3.0
	200	6100	1200	1.0	2.5	6100	960	1.0	2.5
Depth of cut									

- 1) When high machining accuracy is needed, or workpiece becomes chipped, we recommend lowering feed rate.
- 2) Use a milling machine dedicated for graphite.
- 3) If rigidity of machine or work materials installation is very low, or chattering and noise are generated, reduce revolution and feed rate proportionately.

Diamond Coated End Mills for Graphite

DF2XLB



Ball nose, Medium cut length, 2 flute, Long neck, For graphite




Aluminum Alloy	Copper Alloy	Graphite	GFRP CFRP	Machineable Ceramics
○	◎	◎	○	○



Effective length
for inclined angle

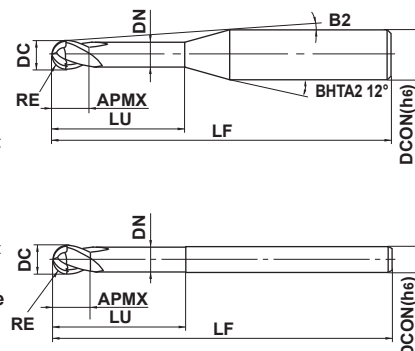

Type1

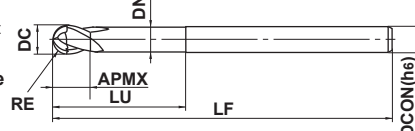

Type2

R	0.1 ≤ RE ≤ 3				
	±0.01				
h6	DCON=4,6				
	0 - 0.008				

● 2 flute long neck ball nose end mill with original diamond coating for graphite machining.

(mm)

Order Number	RE	DC	APMX	LU	DN	B2	LF	DCON	No. F *	Stock	Type	Effective length for inclined angle			
												30°	1°	2°	3°
DF2XLB0010N005	0.1	0.2	0.2	0.5	0.18	11.5°	50	4	2	●	1	0.5	0.5	0.6	0.7
DF2XLB0015N020	0.15	0.3	0.3	2	0.27	9.9°	50	4	2	●	1	2.1	2.2	2.4	2.6
DF2XLB0015N030	0.15	0.3	0.3	3	0.27	9.1°	50	4	2	●	1	3.1	3.2	3.6	3.9
DF2XLB0020N010	0.2	0.4	0.6	1	0.36	11°	50	4	2	●	1	1.0	1.0	1.1	1.2
DF2XLB0020N020	0.2	0.4	0.6	2	0.36	10°	50	4	2	●	1	2.0	2.1	2.3	2.6
DF2XLB0020N030	0.2	0.4	0.6	3	0.36	9.1°	50	4	2	●	1	3.1	3.2	3.5	3.9
DF2XLB0020N040	0.2	0.4	0.6	4	0.36	8.4°	60	4	2	●	1	4.1	4.3	4.7	5.2
DF2XLB0020N080	0.2	0.4	0.6	8	0.36	6.4°	60	4	2	●	1	8.3	8.7	9.5	10.5
DF2XLB0020N120	0.2	0.4	0.6	12	0.36	5.1°	60	4	2	●	1	12.5	13.0	14.3	15.8
DF2XLB0025N040	0.25	0.5	0.6	4	0.46	8.3°	60	4	2	●	1	4.1	4.3	4.7	5.2
DF2XLB0025N050	0.25	0.5	0.6	5	0.46	7.7°	60	4	2	●	1	5.2	5.4	5.9	6.5
DF2XLB0025N080	0.25	0.5	0.6	8	0.46	6.3°	60	4	2	●	1	8.3	8.7	9.5	10.5
DF2XLB0030N020	0.3	0.6	0.9	2	0.56	9.9°	60	4	2	●	1	2.1	2.2	2.4	2.6
DF2XLB0030N040	0.3	0.6	0.9	4	0.56	8.3°	60	4	2	●	1	4.2	4.4	4.8	5.2
DF2XLB0030N050	0.3	0.6	0.9	5	0.56	7.6°	60	4	2	●	1	5.2	5.4	6.0	6.6
DF2XLB0030N060	0.3	0.6	0.9	6	0.56	7.1°	60	4	2	●	1	6.3	6.5	7.1	7.9
DF2XLB0030N080	0.3	0.6	0.9	8	0.56	6.2°	60	4	2	●	1	8.3	8.7	9.5	10.6
DF2XLB0030N100	0.3	0.6	0.9	10	0.56	5.5°	60	4	2	●	1	10.4	10.9	11.9	13.2
DF2XLB0030N160	0.3	0.6	0.9	16	0.56	4.1°	60	4	2	●	1	16.7	17.4	19.1	21.2
DF2XLB0040N060	0.4	0.8	1.2	6	0.76	7°	60	4	2	●	1	6.3	6.5	7.1	7.9
DF2XLB0040N080	0.4	0.8	1.2	8	0.76	6.1°	60	4	2	●	1	8.3	8.7	9.5	10.5
DF2XLB0050N040	0.5	1	1.5	4	0.94	8°	60	4	2	●	1	4.2	4.4	4.8	5.3
DF2XLB0050N060	0.5	1	1.5	6	0.94	6.8°	60	4	2	●	1	6.3	6.6	7.2	8.0
DF2XLB0050N080	0.5	1	1.5	8	0.94	5.9°	60	4	2	●	1	8.4	8.8	9.6	10.6
DF2XLB0050N100	0.5	1	1.5	10	0.94	5.2°	60	4	2	●	1	10.5	11.0	12.0	13.3
DF2XLB0050N120	0.5	1	1.5	12	0.94	4.6°	60	4	2	●	1	12.6	13.2	14.4	15.9
NEW DF2XLB0050N160	0.5	1	1.5	16	0.94	3.8°	80	4	2	●	1	16.8	17.5	19.2	21.3
DF2XLB0050N200	0.5	1	1.5	20	0.94	3.3°	80	4	2	●	1	21.0	21.9	24.0	26.6
DF2XLB0050N300	0.5	1	1.5	30	0.94	2.4°	80	4	2	●	1	31.4	32.8	36.0	*
DF2XLB0050N400	0.5	1	1.5	40	0.94	1.9°	80	4	2	●	1	41.8	43.7	*	*
DF2XLB0075N080	0.75	1.5	2.3	8	1.44	5.4°	60	4	2	●	1	8.4	8.8	9.6	10.6
DF2XLB0075N100	0.75	1.5	2.3	10	1.44	4.7°	60	4	2	●	1	10.5	11.0	12.0	13.2
DF2XLB0075N160	0.75	1.5	2.3	16	1.44	3.4°	80	4	2	●	1	16.8	17.5	19.2	21.2
NEW DF2XLB0075N200	0.75	1.5	2.3	20	1.44	2.8°	80	4	2	●	1	21.0	21.9	23.9	26.5

* Number of Flutes

* No interference

● : Inventory maintained in Japan.

(mm)

Order Number	RE	DC	APMX	LU	DN	B2	LF	DCON	No. F *	Stock	Type	Effective length for inclined angle			
												30°	1°	2°	3°
DF2XLBR0075N300	0.75	1.5	2.3	30	1.44	2.1°	80	4	2	●	1	31.4	32.8	35.9	*
DF2XLBR0075N400	0.75	1.5	2.3	40	1.44	1.6°	80	4	2	●	1	41.8	43.7	*	*
DF2XLBR0100N080	1	2	3	8	1.9	4.9°	60	4	2	●	1	8.3	8.7	9.4	10.4
DF2XLBR0100N100	1	2	3	10	1.9	4.2°	60	4	2	●	1	10.4	10.9	11.8	13.0
DF2XLBR0100N120	1	2	3	12	1.9	3.7°	60	4	2	●	1	12.5	13.0	14.2	15.7
DF2XLBR0100N160	1	2	3	16	1.9	2.9°	80	4	2	●	1	16.7	17.4	19.0	*
DF2XLBR0100N200	1	2	3	20	1.9	2.5°	80	4	2	●	1	20.9	21.8	23.8	*
DF2XLBR0100N250	1	2	3	25	1.9	2°	80	4	2	●	1	26.1	27.2	*	*
DF2XLBR0100N400	1	2	3	40	1.9	1.4°	100	4	2	●	1	41.7	43.5	*	*
DF2XLBR0100N600	1	2	3	60	1.9	0.9°	100	4	2	●	1	62.6	*	*	*
DF2XLBR0150N160	1.5	3	4.5	16	2.9	1.7°	80	4	2	●	1	16.7	17.3	*	*
DF2XLBR0150N250	1.5	3	4.5	25	2.9	1.2°	80	4	2	●	1	26.1	27.2	*	*
DF2XLBR0150N400	1.5	3	4.5	40	2.9	0.7°	100	4	2	●	1	41.7	*	*	*
DF2XLBR0150N600	1.5	3	4.5	60	2.9	0.5°	100	4	2	●	1	*	*	*	*
DF2XLBR0200N080	2	4	6	8	3.9	—	80	4	2	●	2	*	*	*	*
DF2XLBR0200N200	2	4	6	20	3.9	—	80	4	2	●	2	*	*	*	*
DF2XLBR0200N300	2	4	6	30	3.9	—	80	4	2	●	2	*	*	*	*
DF2XLBR0200N400	2	4	6	40	3.9	—	100	4	2	●	2	*	*	*	*
DF2XLBR0200N600	2	4	6	60	3.9	—	100	4	2	●	2	*	*	*	*
DF2XLBR0300N120	3	6	9	12	5.85	—	100	6	2	●	2	*	*	*	*

* Number of Flutes

* No interference

RE = Radius of Ball Nose

APMX = Length of Cut

DN = Neck Dia.

DCON = Shank Dia.

DC = Dia.

LU = Neck Length

B2 = Tangential Clearance Angle

LF = Overall Length

Diamond Coated End Mills for Graphite

DF2XLB

Ball nose, Medium cut length, 2 flute, Long neck, For graphite


Recommended Cutting Conditions

(mm)

Work material		Graphite				Copper, Copper alloys			
RE	LU	n (min ⁻¹)	vf (mm/min)	ap	ae	n (min ⁻¹)	vf (mm/min)	ap	ae
R0.1	0.5	40000	800	0.01	0.03	40000	800	0.003	0.02
R0.15	2	40000	1200	0.03	0.08	40000	800	0.003	0.03
	3	40000	1200	0.03	0.08	40000	600	0.002	0.03
R0.2	1	40000	1500	0.05	0.15	40000	2000	0.015	0.04
	2	40000	1500	0.05	0.12	40000	1300	0.01	0.04
	3	40000	1300	0.04	0.12	40000	800	0.005	0.04
	4	40000	1300	0.04	0.1	32000	600	0.004	0.04
	8	30000	800	0.03	0.1	—	—	—	—
	12	20000	450	0.03	0.08	—	—	—	—
R0.25	4	40000	1500	0.05	0.15	40000	800	0.01	0.05
	5	38000	1300	0.05	0.15	36000	700	0.008	0.05
	8	30000	1000	0.04	0.12	28000	500	0.002	0.05
R0.3	2	40000	1800	0.07	0.2	40000	1500	0.03	0.06
	4	40000	1500	0.06	0.18	40000	1200	0.02	0.06
	5	40000	1500	0.06	0.17	40000	1100	0.015	0.06
	6	40000	1500	0.06	0.15	40000	1000	0.008	0.06
	8	37000	1200	0.05	0.15	35000	800	0.005	0.06
	10	35000	1000	0.05	0.15	—	—	—	—
	16	22000	530	0.04	0.12	—	—	—	—
R0.4	6	40000	1700	0.08	0.2	40000	1500	0.02	0.08
	8	40000	1700	0.08	0.15	30000	1200	0.008	0.08
R0.5	4	40000	2500	0.12	0.3	40000	2000	0.05	0.1
	6	40000	2500	0.1	0.3	40000	2000	0.03	0.1
	8	40000	2000	0.1	0.25	40000	1800	0.02	0.1
	10	40000	2000	0.1	0.2	33000	1400	0.01	0.1
	12	40000	2000	0.1	0.2	30000	1000	0.007	0.1
	20	30000	1100	0.08	0.2	—	—	—	—
	30	20000	600	0.06	0.15	—	—	—	—
	40	15000	400	0.04	0.12	—	—	—	—
Depth of cut									

- 1) When high machining accuracy is needed, or workpiece becomes chipped, we recommend lowering feed rate.
- 2) Use a milling machine dedicated for graphite.
- 3) If rigidity of machine or work materials installation is very low, or chattering and noise are generated, reduce revolution and feed rate proportionately.

(mm)

Work material		Graphite				Copper, Copper alloys			
RE	LU	n (min ⁻¹)	vf (mm/min)	ap	ae	n (min ⁻¹)	vf (mm/min)	ap	ae
R0.75	8	40000	2800	0.15	0.45	40000	2400	0.07	0.15
	10	40000	2800	0.15	0.45	32000	1800	0.05	0.15
	16	35000	2000	0.15	0.3	20000	900	0.03	0.15
	30	27000	1000	0.1	0.3	—	—	—	—
	40	21000	700	0.08	0.25	—	—	—	—
R1	8	40000	3000	0.23	0.7	40000	3000	0.1	0.2
	10	40000	3000	0.2	0.6	40000	2800	0.08	0.2
	12	35000	2500	0.2	0.6	35000	2300	0.08	0.2
	16	30000	2000	0.2	0.5	30000	1800	0.05	0.2
	20	30000	2000	0.2	0.5	20000	1200	0.04	0.2
	25	25000	1500	0.18	0.45	20000	1000	0.03	0.2
	40	20000	1000	0.15	0.4	—	—	—	—
	60	15000	500	0.1	0.3	—	—	—	—
R1.5	16	28000	3000	0.3	0.9	28000	3000	0.3	0.3
	25	20000	2000	0.25	0.75	20000	2000	0.25	0.3
	40	16000	1500	0.2	0.6	16000	1500	0.2	0.3
	60	14000	1000	0.17	0.45	—	—	—	—
R2	8	24000	3800	0.5	1.5	24000	3800	0.5	0.4
	20	21000	3300	0.5	1.5	21000	3300	0.4	0.4
	30	15000	2000	0.4	1.2	15000	2000	0.3	0.4
	40	13000	1600	0.35	1.0	13000	1600	0.25	0.4
	60	12000	1400	0.3	0.9	12000	1400	0.2	0.4
R3	12	17000	2800	0.6	2.0	17000	2800	0.6	0.6
Depth of cut									

- 1) When high machining accuracy is needed, or workpiece becomes chipped, we recommend lowering feed rate.
- 2) Use a milling machine dedicated for graphite.
- 3) If rigidity of machine or work materials installation is very low, or chattering and noise are generated, reduce revolution and feed rate proportionately.



Diamond Coated End Mills for Graphite

DF3XB

Ball nose, Medium cut length, 3 flute, Taper neck, For graphite



Aluminum Alloy	Copper Alloy	Graphite	GFRP CFRP	Machineable Ceramics
○	◎	◎	○	○

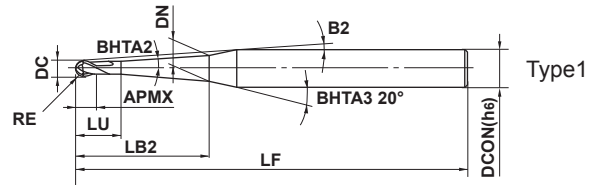

R	0.5 ≤ RE ≤ 2				
	±0.01				
h6	DCON=6				
	0 - 0.008				

● 3 flute taper neck ball nose end mill with original diamond coating for graphite machining.

(mm)

Order Number	RE	DC	BHTA2	APMX	LB2	LU	B2	DN	LF	DCON	No. F *	Stock	Type	Effective length for inclined angle			
														30°	1°	2°	3°
DF3XBR0050L030	0.5	1	0.5°	1.5	30	3	4.0°	1.42	100	6	3	●	1	30.4	32.1	32.8	34.6
DF3XBR0050L040	0.5	1	0.5°	1.5	40	3	3.2°	1.60	100	6	3	●	1	40.4	41.4	43.6	46.0
DF3XBR0050L050	0.5	1	0.5°	1.5	50	3	2.6°	1.77	100	6	3	●	1	50.4	51.7	54.4	*
DF3XBR0100L040	1	2	0.5°	3	40	5	2.6°	2.52	100	6	3	●	1	40.7	41.7	43.9	*
DF3XBR0100L060	1	2	0.5°	3	60	5	1.8°	2.86	130	6	3	●	1	60.7	62.2	*	*
DF3XBR0100L080	1	2	0.5°	3	80	5	1.4°	3.21	130	6	3	●	1	80.7	82.7	*	*
DF3XBR0150L060	1.5	3	0.5°	4.5	60	7.5	1.4°	3.82	130	6	3	●	1	60.8	62.2	*	*
DF3XBR0150L080	1.5	3	0.5°	4.5	80	7.5	1.1°	4.17	130	6	3	●	1	80.8	82.8	*	*
DF3XBR0200L100	2	4	0.5°	6	100	9	0.6°	5.49	160	6	3	●	1	100.8	*	*	*

* Number of Flutes

* No interference

RE = Radius of Ball Nose

APMX = Length of Cut

B2 = Tangential Clearance Angle DCON = Shank Dia.

DC = Dia.

LB2 = Neck Length

DN = Neck Dia.

BHTA2 = Taper Angle One Side


LU = Length of Straight Neck

LF = Overall Length

● : Inventory maintained in Japan.

Recommended Cutting Conditions

(mm)

Work material		Graphite				Copper, Copper alloys			
RE	LB2	n (min ⁻¹)	vf (mm/min)	ap	ae	n (min ⁻¹)	vf (mm/min)	ap	ae
R0.5	30	20000	1100	0.05	0.13	16000	700	0.04	0.13
	40	15000	750	0.04	0.11	12000	480	0.03	0.11
	50	12000	500	0.03	0.10	9600	320	0.02	0.10
R1	40	20000	1800	0.13	0.40	16000	1100	0.10	0.40
	60	15000	900	0.09	0.27	12000	580	0.07	0.27
	80	12000	600	0.07	0.20	9600	380	0.06	0.20
R1.5	60	14000	1700	0.15	0.45	11000	1100	0.12	0.45
	80	12000	1200	0.12	0.35	9600	770	0.10	0.35
R2	100	10000	1100	0.20	0.50	8000	700	0.16	0.50
Depth of cut									

- 1) When high machining accuracy is needed, or workpiece becomes chipped, we recommend lowering feed rate.
- 2) Use a milling machine dedicated for graphite.
- 3) If rigidity of machine or work materials installation is very low, or chattering and noise are generated, reduce revolution and feed rate proportionately.

Diamond Coated End Mills for Graphite

DFPSRB


Corner radius end mill, Short cut length, 2–4 flute, High precision, For graphite




DC ≤ 1.5

DC ≥ 2

Aluminum Alloy	Copper Alloy	Graphite	GFRP CFRP	Machineable Ceramics
○	◎	◎	○	○

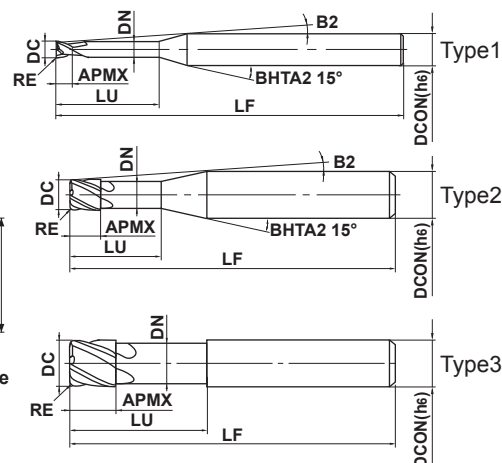

Effective length
for inclined angle



R	0.1 ≤ RE ≤ 1				
	±0.01				
DC	0.5 ≤ DC ≤ 12				
	0 - 0.02				
h6	4 ≤ DCON ≤ 6	8 ≤ DCON ≤ 10	DCON = 12		
	0 - 0.008	0 - 0.009	0 - 0.011		

● ±0.01mm corner radius tolerance, 0—-0.02mm outer diameter tolerance.

Corner radius end mill with original diamond coating for precise and efficient graphite machining.

(mm)

Order Number	DC	RE	APMX	LU	DN	B2	LF	DCON	No. F *	Stock	Type	Effective length for inclined angle			
												30°	1°	2°	3°
DFPSRBD0050R010N04	0.5	0.1	0.75	4	0.46	9.5°	60	4	2	●	1	4.1	4.3	4.6	5.0
DFPSRBD0050R010N05	0.5	0.1	0.75	5	0.46	8.7°	60	4	2	●	1	5.2	5.4	5.7	6.2
DFPSRBD0050R010N06	0.5	0.1	0.75	6	0.46	8°	60	4	2	●	1	6.2	6.4	6.9	7.5
DFPSRBD0050R010N10	0.5	0.1	0.75	10	0.46	6.1°	60	4	2	●	1	10.3	10.7	11.5	12.4
DFPSRBD0050R010N15	0.5	0.1	0.75	15	0.46	4.7°	60	4	2	●	1	15.5	16.0	17.2	18.6
DFPSRBD0080R010N06	0.8	0.1	1	6	0.76	7.7°	60	4	2	●	1	6.2	6.4	6.9	7.5
DFPSRBD0080R010N08	0.8	0.1	1	8	0.76	6.6°	60	4	2	●	1	8.3	8.6	9.2	9.9
DFPSRBD0100R010N08	1	0.1	1.5	8	0.94	6.3°	60	4	2	●	1	8.5	8.8	9.5	10.2
DFPSRBD0100R010N12	1	0.1	1.5	12	0.94	4.9°	60	4	2	●	1	12.6	13.1	14.1	15.2
DFPSRBD0100R020N08	1	0.2	1.5	8	0.94	6.3°	60	4	2	●	1	8.5	8.8	9.5	10.2
DFPSRBD0100R020N12	1	0.2	1.5	12	0.94	4.9°	60	4	2	●	1	12.6	13.1	14.1	15.2
DFPSRBD0100R020N16	1	0.2	1.5	16	0.94	4°	70	4	2	●	1	16.8	17.4	18.7	20.2
DFPSRBD0100R020N20	1	0.2	1.5	20	0.94	3.4°	70	4	2	●	1	20.9	21.7	23.3	25.1
DFPSRBD0100R020N30	1	0.2	1.5	30	0.94	2.5°	70	4	2	●	1	31.3	32.4	34.8	*
DFPSRBD0150R020N10	1.5	0.2	2.3	10	1.44	4.9°	70	4	2	●	1	10.5	11.0	11.8	12.7
DFPSRBD0150R020N20	1.5	0.2	2.3	20	1.44	2.9°	70	4	2	●	1	20.9	21.7	23.3	*
DFPSRBD0200R010N08	2	0.1	3	8	1.9	4.9°	70	4	4	●	2	8.4	8.7	9.4	10.1
DFPSRBD0200R020N12	2	0.2	3	12	1.9	3.7°	70	4	4	●	2	12.5	13.0	14.0	15.1
DFPSRBD0200R020N16	2	0.2	3	16	1.9	2.9°	70	4	4	●	2	16.7	17.3	18.6	*
DFPSRBD0200R020N20	2	0.2	3	20	1.9	2.5°	80	4	4	●	2	20.8	21.5	23.2	*
DFPSRBD0200R020N30	2	0.2	3	30	1.9	1.7°	80	4	4	●	2	31.2	32.2	*	*
DFPSRBD0200R020N40	2	0.2	3	40	1.9	1.4°	80	4	4	●	2	41.5	42.9	*	*
DFPSRBD0200R030N08	2	0.3	3	8	1.9	5°	70	4	4	●	2	8.4	8.7	9.3	10.1
DFPSRBD0300R020N20	3	0.2	4.5	20	2.9	1.4°	80	4	4	●	2	20.8	21.5	*	*
DFPSRBD0300R020N40	3	0.2	4.5	40	2.9	0.7°	80	4	4	●	2	41.5	*	*	*
DFPSRBD0300R030N12	3	0.3	4.5	12	2.9	2.1°	80	4	4	●	2	12.5	13.0	13.9	*
DFPSRBD0300R050N20	3	0.5	4.5	20	2.9	1.4°	80	4	4	●	2	20.8	21.5	*	*
DFPSRBD0400R020N20	4	0.2	6	20	3.9	—	80	4	4	●	3	*	*	*	*
DFPSRBD0400R020N40	4	0.2	6	40	3.9	—	80	4	4	●	3	*	*	*	*
DFPSRBD0400R050N20	4	0.5	6	20	3.9	—	80	4	4	●	3	*	*	*	*
DFPSRBD0400R050N40	4	0.5	6	40	3.9	—	80	4	4	●	3	*	*	*	*
DFPSRBD0600R010N24	6	0.1	9	24	5.85	—	90	6	4	●	3	*	*	*	*
DFPSRBD0600R030N24	6	0.3	9	24	5.85	—	90	6	4	●	3	*	*	*	*

* Number of Flutes

* No interference

● : Inventory maintained in Japan.

(mm)

Order Number	DC	RE	APMX	LU	DN	B2	LF	DCON	No. F *	Stock	Type	Effective length for inclined angle			
												30°	1°	2°	3°
DFPSRBD0600R050N24	6	0.5	9	24	5.85	—	90	6	4	●	3	*	*	*	*
DFPSRBD0600R050N30	6	0.5	9	30	5.85	—	90	6	4	●	3	*	*	*	*
DFPSRBD0600R100N30	6	1	9	30	5.85	—	90	6	4	●	3	*	*	*	*
DFPSRBD0800R050N30	8	0.5	12	30	7.85	—	90	8	4	●	3	*	*	*	*
DFPSRBD0800R100N30	8	1	12	30	7.85	—	90	8	4	●	3	*	*	*	*
DFPSRBD1000R050N40	10	0.5	15	40	9.7	—	130	10	4	●	3	*	*	*	*
DFPSRBD1000R100N40	10	1	15	40	9.7	—	130	10	4	●	3	*	*	*	*
DFPSRBD1200R050N40	12	0.5	18	40	11.7	—	130	12	4	●	3	*	*	*	*

* Number of Flutes

* No interference

RE = Radius of Ball Nose
DC = Dia.

APMX = Length of Cut
LU = Neck Length

DN = Neck Dia.

B2 = Tangential Clearance Angle

DCON = Shank Dia.

LF = Overall Length


Diamond Coated End Mills for Graphite

DFPSRB

Corner radius end mill, Short cut length, 2—4 flute, High precision, For graphite

Recommended Cutting Conditions

(mm)

Work material			Graphite				Copper, Copper alloys			
DC	RE	LU	n (min ⁻¹)	vf (mm/min)	ap	ae	n (min ⁻¹)	vf (mm/min)	ap	ae
0.5	0.1	4	30000	1100	0.05	0.23	24000	700	0.04	0.23
	0.1	5	28000	960	0.05	0.23	22000	600	0.04	0.23
	0.1	6	25000	850	0.05	0.23	20000	540	0.04	0.23
	0.1	10	22000	600	0.04	0.21	—	—	—	—
	0.1	15	20000	500	0.03	0.18	—	—	—	—
0.8	0.1	6	28000	1300	0.08	0.45	22000	830	0.06	0.45
	0.1	8	22000	900	0.08	0.45	18000	580	0.06	0.45
1	0.1	8	25000	1500	0.1	0.6	20000	960	0.08	0.6
	0.1	12	22000	1300	0.1	0.6	18000	830	0.08	0.6
	0.2	8	25000	1500	0.1	0.45	20000	960	0.08	0.45
	0.2	12	22000	1300	0.1	0.45	18000	830	0.08	0.45
	0.2	16	18000	1000	0.08	0.4	14000	640	0.06	0.4
	0.2	20	15000	800	0.08	0.4	—	—	—	—
	0.2	30	12000	600	0.07	0.35	—	—	—	—
1.5	0.2	10	18000	1400	0.15	0.8	14000	900	0.12	0.8
	0.2	20	12000	900	0.12	0.65	9600	580	0.1	0.65
2	0.1	8	24000	3300	0.2	1.2	19000	2100	0.16	1.2
	0.2	12	22000	3000	0.2	1.2	18000	1900	0.16	1.2
	0.2	16	19000	2500	0.2	1.2	15000	1600	0.16	1.2
	0.2	20	16000	2000	0.2	1.2	13000	1300	0.16	1.2
	0.2	30	13000	1600	0.16	1.0	—	—	—	—
	0.2	40	11000	1200	0.14	0.8	—	—	—	—
	0.3	8	24000	3300	0.3	1.2	19000	2100	0.24	1.2
3	0.2	20	18000	3000	0.3	2.0	14000	1900	0.24	2.0
	0.2	40	12000	1800	0.25	1.7	9600	1100	0.2	1.7
	0.3	12	20000	4500	0.3	1.5	16000	2900	0.24	1.5
	0.5	20	18000	3000	0.3	1.5	14000	1900	0.24	1.5
4	0.2	20	18000	4200	0.4	2.7	14000	2700	0.3	2.7
	0.2	40	13000	2800	0.4	2.7	10000	1800	0.3	2.7
	0.5	20	18000	4200	0.4	2.3	14000	2700	0.3	2.3
	0.5	40	13000	2800	0.4	2.3	10000	1800	0.3	2.3
6	0.1	24	14000	4600	0.6	3.8	11000	2900	0.5	3.8
	0.3	24	14000	4600	0.6	3.8	11000	2900	0.5	3.8
	0.5	24	14000	4600	0.6	3.8	11000	2900	0.5	3.8
	0.5	30	14000	4600	0.6	3.8	11000	2900	0.5	3.8
	1	30	14000	4600	0.6	3.0	11000	2900	0.5	3.0
8	0.5	30	10500	4000	0.8	5.3	8400	2600	0.6	5.3
	1	30	10500	4000	0.8	4.5	8400	2600	0.6	4.5
10	0.5	40	8700	3500	1.0	6.8	7000	2200	0.8	6.8
	1	40	8700	3500	1.0	6.0	7000	2200	0.8	6.0
12	0.5	40	7200	3000	1.2	8.0	5800	1900	1.0	8.0
Depth of cut										




1) When high machining accuracy is needed, or workpiece becomes chipped, we recommend lowering feed rate.

2) Use a milling machine dedicated for graphite.


3) If rigidity of machine or work materials installation is very low, or chattering and noise are generated, reduce revolution and feed rate proportionately.

Cutting Performance

Cutting Performance (DF4JC)

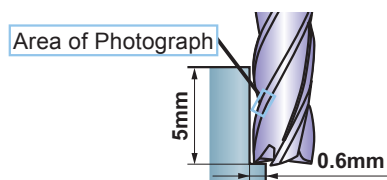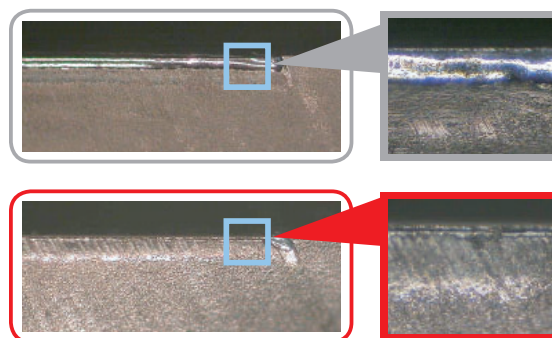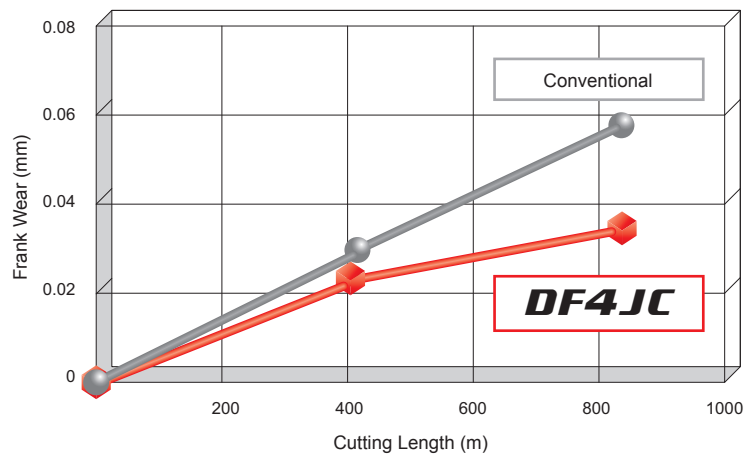

End Mill	DF4JCD1200 (ø12mm)
Work Material	Graphite (ISO-63)
Revolution	7200 min ⁻¹ (271 m/min)
Feed Rate	2200 mm/min (0.08 mm/t.)
Cutting Mode	Dry Cutting

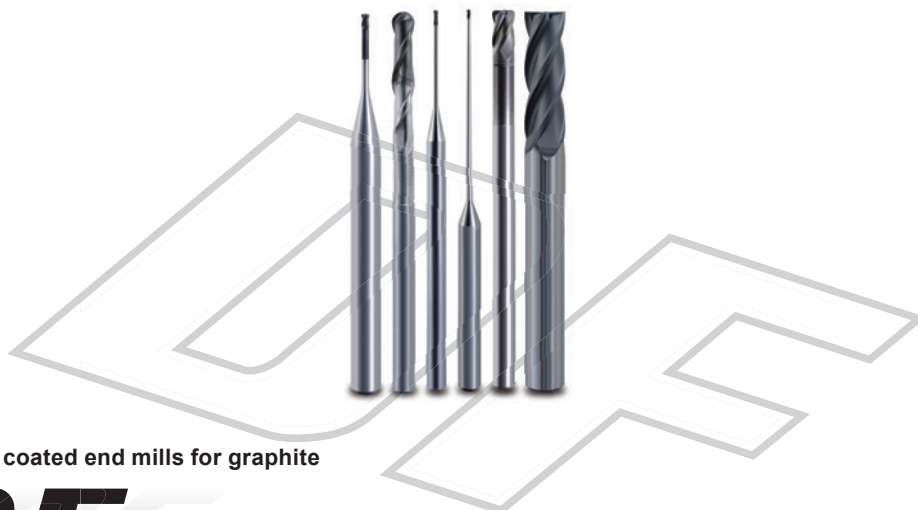

Diamond coated end mills for graphite

DF endmill series

For Your Safety

●Don't handle inserts and chips without gloves. ●Please machine within the recommended application range and exchange expired tools with new ones in advance of breakage. ●Please use safety covers and wear safety glasses. ●When using compounded cutting oils, please take fire precautions. ●When attaching inserts or spare parts, please use only the correct wrench or driver. ●When using rotating tools, please make a trial run to check run-out, vibration and abnormal sounds etc.

 **MITSUBISHI MATERIALS CORPORATION**

MITSUBISHI MATERIALS CORPORATION

Overseas Sales Dept, Asian Region

KFC bldg., 8F, 1-6-1 Yokoami, Sumida-ku, Tokyo 130-0015, Japan
TEL +81-3-5819-8771 FAX +81-3-5819-8774

Overseas Sales Dept, European & American Region

KFC bldg., 8F, 1-6-1 Yokoami, Sumida-ku, Tokyo 130-0015, Japan
TEL +81-3-5819-8772 FAX +81-3-5819-8774

<http://www.mitsubishicarbide.com/en/>
(Tools specifications subject to change without notice.)

EXP-09-N100
2017.4.(-)