

For Machining of  
Hardened Steel

**IMPACT MIRACLE**  
End Mill Series

# IMPACT MIRACLE REVOLUTION

Series  
Expansion

## Revolutionary Machining of Hardened Steel

New coating provides outstanding tool life



For Machining of Hardened Steel


# IMPACT MIRACLE End Mill Series

## IMPACT MIRACLE REVOLUTION




### IMPACT MIRACLE REVOLUTION Coating

A combination of the newly developed (Al, Cr, Si) N coating with improved lubricity and a high oxidation temperature, together with the (Al, Ti, Si) N coating layer that displays excellent wear and adhesion to other coating layers, enables efficient and reliable machining of hardened steels.

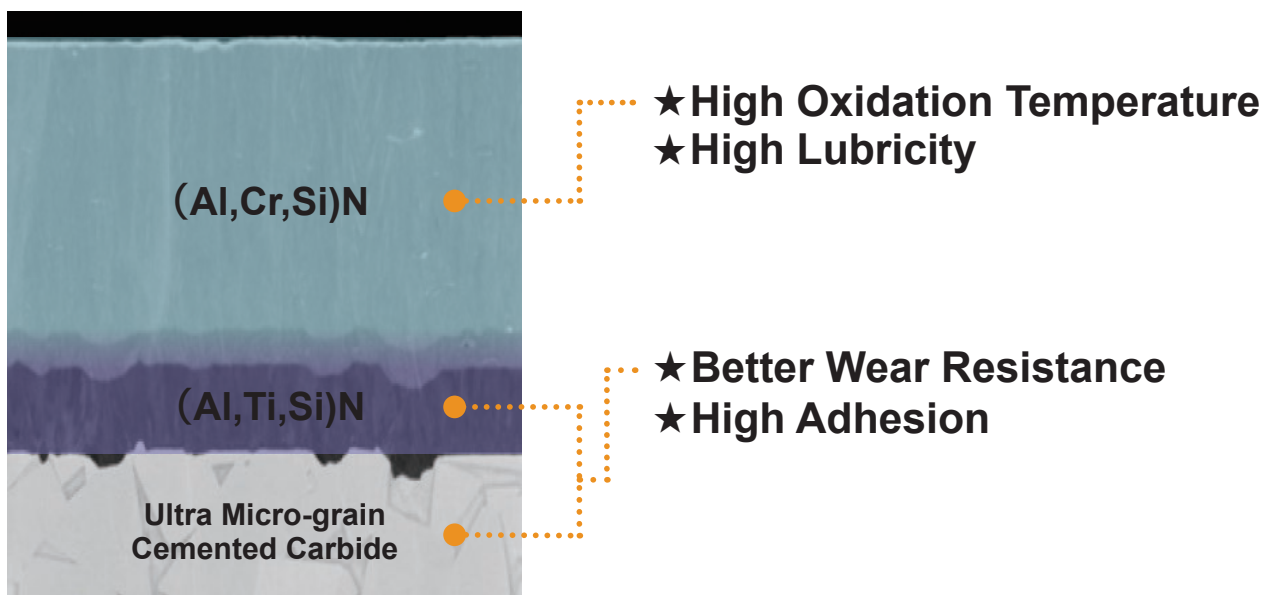

Due to manufacturing adjustments, differences in the colour of the coating for different diameters may occur. This has no adverse effect on performance.

**Selection According to the Hardness of the Workpiece Material.**

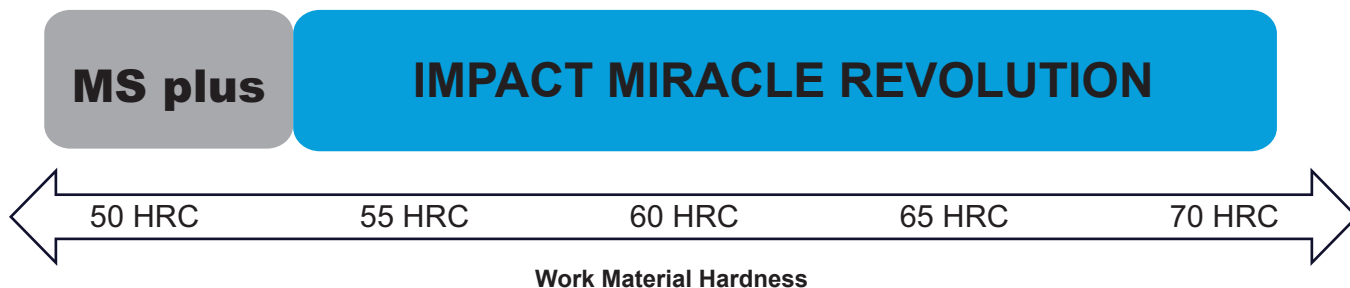

# SERIES SELECTION CHART


| (mm)          |                       |                                                                                       |                                                                                     |                  |      |         |      |                   |      |                    |                       |                       |      |
|---------------|-----------------------|---------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------|------|---------|------|-------------------|------|--------------------|-----------------------|-----------------------|------|
| No. of Flutes | Type                  | Specifications                                                                        | Shape                                                                               | Corner Radius RE |      | Dia. DC |      | Depth of Cut APMX | Size | Workpiece Material |                       |                       | Page |
|               |                       |                                                                                       |                                                                                     | Min.             | Max. | Min.    | Max. | Max. DC           |      | P                  | H                     |                       |      |
|               |                       |                                                                                       |                                                                                     |                  |      |         |      |                   |      | Tool Steel ≤45HRC  | Hardened Steel ≤55HRC | Hardened Steel >55HRC |      |
| Ball Nose     |                       |                                                                                       |                                                                                     |                  |      |         |      |                   |      |                    |                       |                       |      |
| 2             | VFR2SSB               | Strong S Curve<br>Short Shank Type                                                    |    | 0.5              | 6.0  | 1.0     | 12.0 | 12                | 12   | ○                  | ◎                     | ◎                     | P.8  |
| 2             | VFR2SB                | Strong S Curve                                                                        |    | 0.1              | 10.0 | 0.2     | 20.0 | 38                | 36   | ○                  | ◎                     | ◎                     | P.9  |
| 2             | VFR2SBF               | For Mirror Finishes                                                                   |    | 0.5              | 3.0  | 1.0     | 6.0  | 12                | 8    | ○                  | ◎                     | ◎                     | P.11 |
| 2             | VFR2XLB               | Long Neck Type<br>For Machining of Vertical Walls                                     |    | 0.1              | 3.0  | 0.2     | 6.0  | 6                 | 74   | ○                  | ◎                     | ◎                     | P.13 |
| 4             | <div>NEW</div> VFR4MB | For High Speed and<br>High Efficiency machining                                       |  | 0.5              | 6.0  | 1.0     | 12.0 | 22                | 9    | ○                  | ◎                     | ◎                     | P.6  |
| Corner Radius |                       |                                                                                       |                                                                                     |                  |      |         |      |                   |      |                    |                       |                       |      |
| 4             | VFRPSRB               | Completely Seamless Curved R Edge<br>DC≥1.5<br>For High Precision Machining. 1.5≤DC≤5 |  | 0.05             | 3.0  | 0.5     | 12.0 | 18                | 97   | ○                  | ◎                     | ◎                     | P.17 |

Ball nose, Medium cut length, 4-Flute

# VFR4MB NEW


**Higher efficiencies from increased feed rates when finish machining.**

Shorter machining times while maintaining good surface finishes.

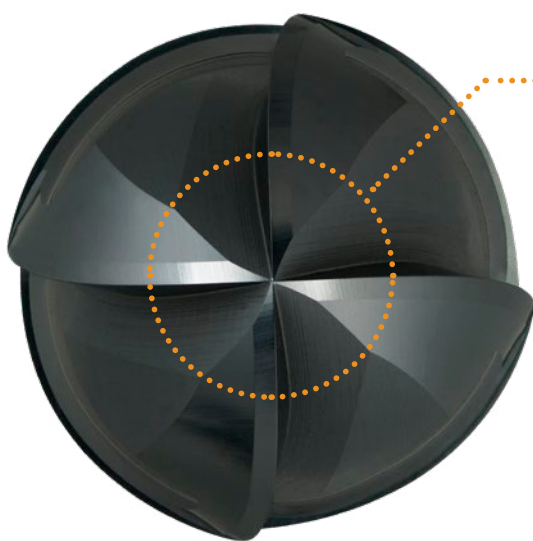

## Versatile 4-flute design


All 4 flutes extend from the centre to the periphery. This enables high feeds at any cutting angle and negates the need to calculate different machining conditions.

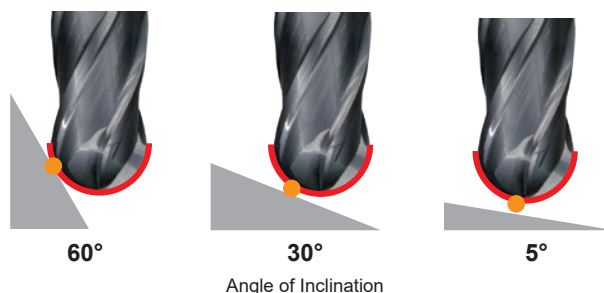

## Correct Use of 2- and 4-Flute Geometries

2-flute geometries usually have a larger chip pocket and are better for rough machining with greater depths of cut that produce a larger volume of chips.

4-flute geometries can increase efficiency and reduce wear when used for finishing at small depths of cut. Additionally, using a 4-flute geometry is advantageous when machining harder materials at reduced depths of cut.

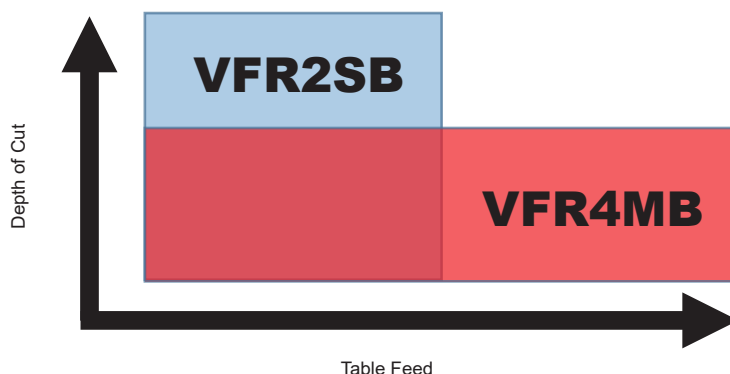




# Cutting Performance

## Comparison of the Surface Finish - Machining ASP23 (62HRC)


The 4-flute type is superior for high efficiency machining, but when used at the same feed rate as a 2-flute type, the quality of the finished surface can be improved.

### VFR4MB

2-Flute conventional product

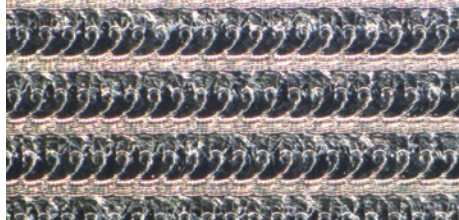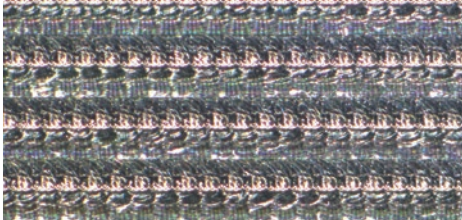

**Ra:0.27**  
**Rz:1.01**




**Ra:0.32**  
**Rz:1.62**

#### <Cutting Conditions>


Workpiece Material : ASP23(62HRC)  
Tool : VFR4MBR0400 DC=8mm  
Revolution :  $n=12000 \text{ min}^{-1}$   
Table Feed :  $f=3600 \text{ mm/min}$   
Depth of Cut :  $a_p=0.2 \text{ mm}$   
 $a_e=0.8 \text{ mm}$   
Overhang Length : 20 mm  
Cutting Mode : Air blow  
Down(climb) Cut

## Comparison of Wear Resistance Surface - Machining HAP72 (69HRC)

IMPACT MIRACLE REVOLUTION end mills demonstrate excellent wear resistance even when machining high hardness workpiece materials.

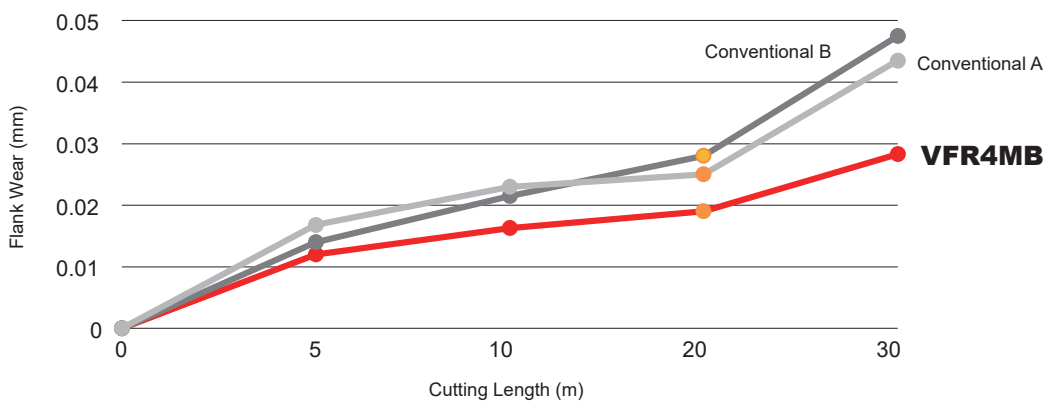


Taken after a cutting length of 20 m



**VFR4MB**



Conventional A



Conventional B

#### <Cutting Conditions>

Workpiece Material : HAP72(69HRC)  
Tool : VFR4MBR0100 DC=2mm  
Revolution :  $n=16000 \text{ min}^{-1}$   
Table Feed :  $f=1200 \text{ mm/min}$   
Depth of Cut :  $a_p=0.06 \text{ mm}$   
 $a_e=0.2 \text{ mm}$   
Overhang Length : 17 mm  
Cutting Mode : Air blow  
Down(climb) Cut  
Machine : Vertical MC

## Application Example



Ball nose, Medium cut length, 4-Flute

# VFR4MB

High efficiency and high precision finishing of  
press mould parts (60HRC)

### Issues from Customer


- ① Issue with machining efficiency due to the curvature of the workpiece material so a corner radius end mill cannot be used.
- ② A 4-flute type was used to machine, but at the tip, the chip discharge was poor and resulted in a torn surface finish.  
The tool was changed to a 2-flute type.
- ③ The 2-flute type showed excessive wear after a long cut length and necessitated a tool change because the surface finish accuracy could not be maintained.

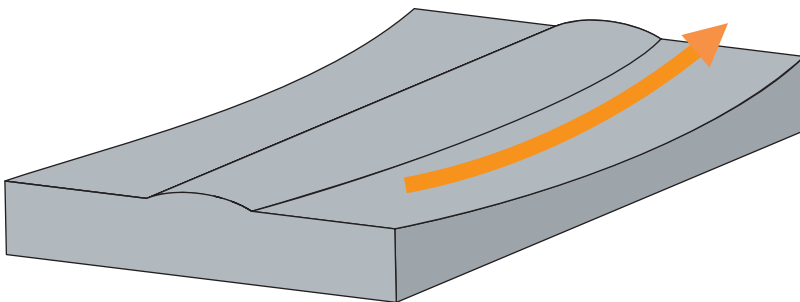

#### <Cutting Conditions>

Workpiece Material : JIS SKD11(60HRC)  
Revolution :  $n=6000 \text{ min}^{-1}$   
Table Feed :  $f=2800 \text{ mm/min}$   
Depth of Cut :  $a_p=0.02 \text{ mm}$   
                   $a_e=\text{Setting surface roughness } 6.3z$   
Cutting Mode : Dry Cutting  
Machine : Vertical MC(BBT50)  
Cutting Time : 120 min

Results after machining for 120m

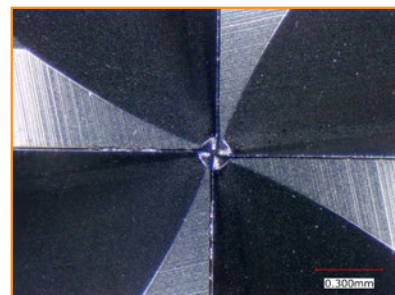


**VFR4MB** End Cutting Edge Condition  
Flank Wear :  $17\mu\text{m}$

### Comments from Customer Evaluation


- VFR4MB showed almost no wear and no change in surface roughness even though the tip was overworked on the contours of a press mould.
- By making it possible to machine with a single end mill, the costs were reduced and the time problems which required a tool change every 2 hours of machining or more were resolved. In addition, the feed rate could be increased by 1.5 which shortened the machining time.

# VFR4MB NEW

Ball nose, Medium cut length, 4-Flute



| Carbon Steel, Alloy Steel, Cast Iron<br>(≤30HRC) | Tool Steel, Pre-Hardened Steel, Hardened Steel<br>(≤45HRC) | Hardened Steel<br>(≤55HRC) | Hardened Steel<br>(>55HRC) | Austenitic<br>Stainless Steel | Titanium Alloy,<br>Heat Resistant Alloy | Copper Alloy | Aluminium Alloy |
|--------------------------------------------------|------------------------------------------------------------|----------------------------|----------------------------|-------------------------------|-----------------------------------------|--------------|-----------------|
|                                                  | ○                                                          | ◎                          | ◎                          |                               |                                         |              |                 |

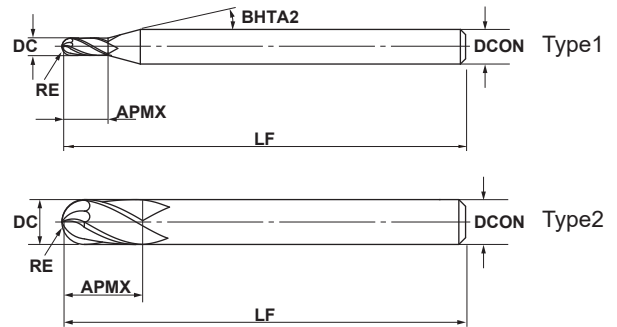

| RE                                                  |                                                     |                                                     |  |  |
|-----------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|--|--|
| ±0.010                                              |                                                     |                                                     |  |  |
| DCON=6                                              | 8 ≤ DCON ≤ 10                                       | DCON=12                                             |  |  |
| $\begin{smallmatrix} 0 \\ -0.008 \end{smallmatrix}$ | $\begin{smallmatrix} 0 \\ -0.009 \end{smallmatrix}$ | $\begin{smallmatrix} 0 \\ -0.011 \end{smallmatrix}$ |  |  |

- The 4 flute geometry with a cutting edge extending to the centre achieves a long tool life and enables high efficiency machining.

(mm)

| Order Number | RE  | DC | APMX | LF  | BHTA2 | DCON | No.F <sup>*</sup> | Stock | Type |
|--------------|-----|----|------|-----|-------|------|-------------------|-------|------|
| VFR4MBR0050  | 0.5 | 1  | 2.5  | 50  | 15    | 6    | 4                 | ●     | 1    |
| VFR4MBR0100  | 1   | 2  | 6    | 60  | 15    | 6    | 4                 | ●     | 1    |
| VFR4MBR0150  | 1.5 | 3  | 8    | 70  | 15    | 6    | 4                 | ●     | 1    |
| VFR4MBR0200  | 2   | 4  | 8    | 70  | 15    | 6    | 4                 | ●     | 1    |
| VFR4MBR0250  | 2.5 | 5  | 12   | 80  | 15    | 6    | 4                 | ●     | 1    |
| VFR4MBR0300  | 3   | 6  | 12   | 80  | —     | 6    | 4                 | ●     | 2    |
| VFR4MBR0400  | 4   | 8  | 14   | 90  | —     | 8    | 4                 | ●     | 2    |
| VFR4MBR0500  | 5   | 10 | 18   | 100 | —     | 10   | 4                 | ●     | 2    |
| VFR4MBR0600  | 6   | 12 | 22   | 110 | —     | 12   | 4                 | ●     | 2    |

\* Number of Flutes

RE = Corner Radius  
DC = Cutting Dia.  
APMX = Depth of Cut Max.

LF = Functional Length  
BHTA2 = Body Half Taper Angle  
DCON = Connection Dia.


● : Inventory maintained in Japan.

## VFR4MB

Ball nose, Medium cut length, 4-Flute

### Recommended Cutting Conditions

(mm)


| Workpiece Material | Hardened Steel (45—55HRC)                                                         |                       |                                    |                       |                    |                    | Hardened Steel (55—65HRC)          |                       |                                    |                       |                    |                    | Hardened Steel (65—70HRC)          |                       |                                    |                       |                    |                    |
|--------------------|-----------------------------------------------------------------------------------|-----------------------|------------------------------------|-----------------------|--------------------|--------------------|------------------------------------|-----------------------|------------------------------------|-----------------------|--------------------|--------------------|------------------------------------|-----------------------|------------------------------------|-----------------------|--------------------|--------------------|
|                    | $\alpha \leq 15^\circ$                                                            |                       | $\alpha > 15^\circ$                |                       | Depth of cut<br>ap | Depth of cut<br>ae | $\alpha \leq 15^\circ$             |                       | $\alpha > 15^\circ$                |                       | Depth of cut<br>ap | Depth of cut<br>ae | $\alpha \leq 15^\circ$             |                       | $\alpha > 15^\circ$                |                       | Depth of cut<br>ap | Depth of cut<br>ae |
|                    | Revolution<br>(min <sup>-1</sup> )                                                | Feed rate<br>(mm/min) | Revolution<br>(min <sup>-1</sup> ) | Feed rate<br>(mm/min) |                    |                    | Revolution<br>(min <sup>-1</sup> ) | Feed rate<br>(mm/min) | Revolution<br>(min <sup>-1</sup> ) | Feed rate<br>(mm/min) |                    |                    | Revolution<br>(min <sup>-1</sup> ) | Feed rate<br>(mm/min) | Revolution<br>(min <sup>-1</sup> ) | Feed rate<br>(mm/min) |                    |                    |
| <b>0.5</b>         | 40000                                                                             | 8000                  | 40000                              | 3800                  | 0.06               | 0.10               | 40000                              | 5600                  | 40000                              | 3100                  | 0.05               | 0.10               | 40000                              | 4700                  | 32000                              | 1700                  | 0.03               | 0.10               |
| <b>1.0</b>         | 40000                                                                             | 9600                  | 40000                              | 5600                  | 0.11               | 0.20               | 40000                              | 8000                  | 28000                              | 3100                  | 0.10               | 0.20               | 24000                              | 5000                  | 16000                              | 1200                  | 0.06               | 0.20               |
| <b>1.5</b>         | 40000                                                                             | 12000                 | 32000                              | 5600                  | 0.13               | 0.30               | 32000                              | 7700                  | 19000                              | 2900                  | 0.12               | 0.30               | 16000                              | 4200                  | 11000                              | 1100                  | 0.07               | 0.30               |
| <b>2.0</b>         | 32000                                                                             | 11000                 | 24000                              | 4700                  | 0.15               | 0.40               | 24000                              | 6200                  | 14000                              | 2500                  | 0.13               | 0.40               | 12000                              | 3100                  | 8000                               | 1000                  | 0.08               | 0.40               |
| <b>2.5</b>         | 25000                                                                             | 9000                  | 19000                              | 3800                  | 0.20               | 0.50               | 19000                              | 5300                  | 12000                              | 2200                  | 0.15               | 0.50               | 9600                               | 2700                  | 6000                               | 780                   | 0.08               | 0.50               |
| <b>3.0</b>         | 21000                                                                             | 8400                  | 15000                              | 3400                  | 0.25               | 0.60               | 16000                              | 4800                  | 9600                               | 2000                  | 0.20               | 0.60               | 8000                               | 2300                  | 5000                               | 780                   | 0.09               | 0.60               |
| <b>4.0</b>         | 16000                                                                             | 6400                  | 12000                              | 2600                  | 0.30               | 0.80               | 12000                              | 3600                  | 7200                               | 1600                  | 0.20               | 0.80               | 6000                               | 1900                  | 4000                               | 620                   | 0.09               | 0.80               |
| <b>5.0</b>         | 13000                                                                             | 5200                  | 9600                               | 2200                  | 0.50               | 1.00               | 10000                              | 3200                  | 5800                               | 1300                  | 0.20               | 1.00               | 4800                               | 1500                  | 3000                               | 550                   | 0.10               | 1.00               |
| <b>6.0</b>         | 9000                                                                              | 3600                  | 7200                               | 1700                  | 0.50               | 1.20               | 7000                               | 2200                  | 4300                               | 940                   | 0.30               | 1.20               | 3600                               | 1100                  | 2200                               | 400                   | 0.10               | 1.20               |
| Depth of cut       |  |                       |                                    |                       |                    |                    |                                    |                       |                                    |                       |                    |                    |                                    |                       |                                    |                       |                    |                    |

Note 1) If the depth of cut is shallow, the revolution and feed rate can be increased.

Please reduce the feed rate when the surface finish is important.

Note 2) If the rigidity of the machine or the workpiece materials installation is very low, or chattering and noise are generated, please adjust the revolution, feed rate and depth of cut.

Note 3)  $\alpha$  is the inclination angle of the machined surface.




# VFR2SSB

Ball nose, Short cut length, Short shank, 2-Flute



| Carbon Steel, Alloy Steel, Cast Iron<br>(≤30HRC) | Tool Steel, Pre-Hardened Steel, Hardened Steel<br>(≤45HRC) | Hardened Steel<br>(≤55HRC) | Hardened Steel<br>(>55HRC) | Austenitic<br>Stainless Steel | Titanium Alloy,<br>Heat Resistant Alloy | Copper Alloy | Aluminium Alloy |
|--------------------------------------------------|------------------------------------------------------------|----------------------------|----------------------------|-------------------------------|-----------------------------------------|--------------|-----------------|
|                                                  | ○                                                          | ◎                          | ◎                          |                               |                                         |              |                 |

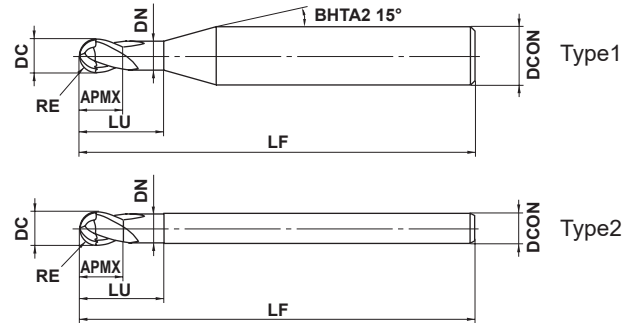

|              |               |              |  |  |
|--------------|---------------|--------------|--|--|
| RE ≤ 6       |               |              |  |  |
| ±0.005       |               |              |  |  |
| 4 ≤ DCON ≤ 6 | 8 ≤ DCON ≤ 10 | DCON = 12    |  |  |
| 0<br>- 0.005 | 0<br>- 0.006  | 0<br>- 0.008 |  |  |

● Optimisation of the flute geometry, helix and rake angles have improved the overall edge strength.

| Order Number    | RE   | DC  | APMX | LU | DN   | LF | DCON | No.F <sup>*</sup> | Stock | Type |
|-----------------|------|-----|------|----|------|----|------|-------------------|-------|------|
| VFR2SSBR0050S04 | 0.5  | 1   | 1    | 2  | 0.94 | 40 | 4    | 2                 | ●     | 1    |
| VFR2SSBR0050    | 0.5  | 1   | 1    | 2  | 0.94 | 40 | 6    | 2                 | ●     | 1    |
| VFR2SSBR0075S04 | 0.75 | 1.5 | 1.5  | 3  | 1.44 | 40 | 4    | 2                 | ●     | 1    |
| VFR2SSBR0075    | 0.75 | 1.5 | 1.5  | 3  | 1.44 | 40 | 6    | 2                 | ●     | 1    |
| VFR2SSBR0100    | 1    | 2   | 2    | 4  | 1.9  | 45 | 6    | 2                 | ●     | 1    |
| VFR2SSBR0150    | 1.5  | 3   | 3    | 6  | 2.9  | 45 | 6    | 2                 | ●     | 1    |
| VFR2SSBR0200    | 2    | 4   | 4    | 8  | 3.9  | 45 | 6    | 2                 | ●     | 1    |
| VFR2SSBR0250    | 2.5  | 5   | 5    | 10 | 4.9  | 50 | 6    | 2                 | ●     | 1    |
| VFR2SSBR0300    | 3    | 6   | 6    | 12 | 5.85 | 50 | 6    | 2                 | ●     | 2    |
| VFR2SSBR0400    | 4    | 8   | 8    | 14 | 7.85 | 60 | 8    | 2                 | ●     | 2    |
| VFR2SSBR0500    | 5    | 10  | 10   | 18 | 9.7  | 70 | 10   | 2                 | ●     | 2    |
| VFR2SSBR0600    | 6    | 12  | 12   | 22 | 11.7 | 75 | 12   | 2                 | ●     | 2    |

\* Number of Flutes

RE = Corner Radius  
DC = Cutting Dia.  
APMX = Depth of Cut Max.

LU = Usable Length  
DN = Neck Dia.  
LF = Functional Length

DCON = Connection Dia.

● : Inventory maintained in Japan.

# For Machining of Hardened Steel

## VFR2SB


Ball nose, Short cut length, 2-Flute



RE < 0.3

RE ≥ 0.3

| Carbon Steel, Alloy Steel, Cast Iron<br>(≤30HRC) | Tool Steel, Pre-Hardened Steel, Hardened Steel<br>(≤45HRC) | Hardened Steel<br>(≤55HRC) | Hardened Steel<br>(>55HRC) | Austenitic<br>Stainless Steel | Titanium Alloy,<br>Heat Resistant Alloy | Copper Alloy | Aluminium Alloy |
|--------------------------------------------------|------------------------------------------------------------|----------------------------|----------------------------|-------------------------------|-----------------------------------------|--------------|-----------------|
|                                                  | ○                                                          | ◎                          | ◎                          |                               |                                         |              |                 |

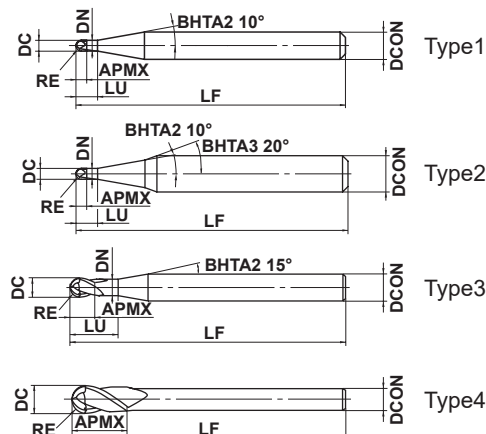

| RE ≤ 6       | RE > 6       |               |              |              |
|--------------|--------------|---------------|--------------|--------------|
| ±0.005       | ±0.010       |               |              |              |
| DCON = 3     | 4 ≤ DCON ≤ 6 | 8 ≤ DCON ≤ 10 | DCON = 12    | DCON = 20    |
| 0<br>- 0.004 | 0<br>- 0.005 | 0<br>- 0.006  | 0<br>- 0.008 | 0<br>- 0.009 |

● Optimisation of the flute geometry, helix and rake angles have improved the overall edge strength.

| (mm)           |      |     |      |     |      |     |      |        |       |      |
|----------------|------|-----|------|-----|------|-----|------|--------|-------|------|
| Order Number   | RE   | DC  | APMX | LU  | DN   | LF  | DCON | * No.F | Stock | Type |
| VFR2SBR0010    | 0.1  | 0.2 | 0.2  | 0.4 | 0.17 | 45  | 4    | 2      | ●     | 1    |
| VFR2SBR0010S06 | 0.1  | 0.2 | 0.2  | 0.4 | 0.17 | 50  | 6    | 2      | ●     | 2    |
| VFR2SBR0015    | 0.15 | 0.3 | 0.3  | 0.6 | 0.27 | 45  | 4    | 2      | ●     | 1    |
| VFR2SBR0015S06 | 0.15 | 0.3 | 0.3  | 0.6 | 0.27 | 50  | 6    | 2      | ●     | 2    |
| VFR2SBR0020    | 0.2  | 0.4 | 0.4  | 0.8 | 0.36 | 45  | 4    | 2      | ●     | 1    |
| VFR2SBR0020S06 | 0.2  | 0.4 | 0.4  | 0.8 | 0.36 | 50  | 6    | 2      | ●     | 2    |
| VFR2SBR0030    | 0.3  | 0.6 | 0.6  | 1.2 | 0.56 | 45  | 4    | 2      | ●     | 3    |
| VFR2SBR0030S06 | 0.3  | 0.6 | 0.6  | 1.2 | 0.56 | 50  | 6    | 2      | ●     | 3    |
| VFR2SBR0040    | 0.4  | 0.8 | 0.8  | 1.6 | 0.76 | 45  | 4    | 2      | ●     | 3    |
| VFR2SBR0040S06 | 0.4  | 0.8 | 0.8  | 1.6 | 0.76 | 50  | 6    | 2      | ●     | 3    |
| VFR2SBR0050    | 0.5  | 1   | 1    | 2   | 0.94 | 45  | 4    | 2      | ●     | 3    |
| VFR2SBR0050S06 | 0.5  | 1   | 1    | 2   | 0.94 | 50  | 6    | 2      | ●     | 3    |
| VFR2SBR0060    | 0.6  | 1.2 | 1.2  | 2.4 | 1.14 | 45  | 4    | 2      | ●     | 3    |
| VFR2SBR0060S06 | 0.6  | 1.2 | 1.2  | 2.4 | 1.14 | 50  | 6    | 2      | ●     | 3    |
| VFR2SBR0070    | 0.7  | 1.4 | 1.4  | 2.8 | 1.34 | 45  | 4    | 2      | ●     | 3    |
| VFR2SBR0070S06 | 0.7  | 1.4 | 1.4  | 2.8 | 1.34 | 50  | 6    | 2      | ●     | 3    |
| VFR2SBR0075    | 0.75 | 1.5 | 1.5  | 3   | 1.44 | 45  | 4    | 2      | ●     | 3    |
| VFR2SBR0075S06 | 0.75 | 1.5 | 1.5  | 3   | 1.44 | 50  | 6    | 2      | ●     | 3    |
| VFR2SBR0080    | 0.8  | 1.6 | 1.6  | 3.2 | 1.54 | 45  | 4    | 2      | ●     | 3    |
| VFR2SBR0080S06 | 0.8  | 1.6 | 1.6  | 3.2 | 1.54 | 50  | 6    | 2      | ●     | 3    |
| VFR2SBR0090    | 0.9  | 1.8 | 1.8  | 3.6 | 1.74 | 45  | 4    | 2      | ●     | 3    |
| VFR2SBR0090S06 | 0.9  | 1.8 | 1.8  | 3.6 | 1.74 | 50  | 6    | 2      | ●     | 3    |
| VFR2SBR0100    | 1    | 2   | 2    | 4   | 1.9  | 50  | 4    | 2      | ●     | 3    |
| VFR2SBR0100S06 | 1    | 2   | 2    | 4   | 1.9  | 60  | 6    | 2      | ●     | 3    |
| VFR2SBR0125S06 | 1.25 | 2.5 | 2.5  | 5   | 2.4  | 60  | 6    | 2      | ●     | 3    |
| VFR2SBR0150    | 1.5  | 3   | 3    | 6   | 2.9  | 70  | 6    | 2      | ●     | 3    |
| VFR2SBR0150S03 | 1.5  | 3   | 3    | —   | —    | 60  | 3    | 2      | ●     | 4    |
| VFR2SBR0200    | 2    | 4   | 4    | 8   | 3.9  | 70  | 6    | 2      | ●     | 3    |
| VFR2SBR0200S04 | 2    | 4   | 4    | —   | —    | 60  | 4    | 2      | ●     | 4    |
| VFR2SBR0250    | 2.5  | 5   | 5    | 10  | 4.9  | 80  | 6    | 2      | ●     | 3    |
| VFR2SBR0300    | 3    | 6   | 12   | —   | —    | 80  | 6    | 2      | ●     | 4    |
| VFR2SBR0400    | 4    | 8   | 14   | —   | —    | 90  | 8    | 2      | ●     | 4    |
| VFR2SBR0500    | 5    | 10  | 18   | —   | —    | 100 | 10   | 2      | ●     | 4    |
| VFR2SBR0600    | 6    | 12  | 22   | —   | —    | 110 | 12   | 2      | ●     | 4    |
| VFR2SBR0800    | 8    | 16  | 30   | —   | —    | 140 | 16   | 2      | ●     | 4    |
| VFR2SBR1000    | 10   | 20  | 38   | —   | —    | 160 | 20   | 2      | ●     | 4    |

\* Number of Flutes

RE = Corner Radius  
DC = Cutting Dia.  
APMX = Depth of Cut Max.

LU = Usable Length  
DN = Neck Dia.  
LF = Functional Length


DCON = Connection Dia.

Ball nose, Short cut length, Short shank, 2-Flute **VFR2SSB**

Ball nose, Short cut length, 2-Flute **VFR2SB**

## Recommended Cutting Conditions


(mm)

| Workpiece Material | Hardened Steel (45—55HRC)                                                           |                       |                                    |                       |                    |                    | Hardened Steel (55—62HRC)          |                       |                                    |                       |                    |                    | Hardened Steel (62—70HRC)          |                       |                                    |                       |                    |                    |
|--------------------|-------------------------------------------------------------------------------------|-----------------------|------------------------------------|-----------------------|--------------------|--------------------|------------------------------------|-----------------------|------------------------------------|-----------------------|--------------------|--------------------|------------------------------------|-----------------------|------------------------------------|-----------------------|--------------------|--------------------|
|                    | JIS SKD61 etc.                                                                      |                       |                                    |                       |                    |                    | JIS SKD11 etc.                     |                       |                                    |                       |                    |                    | JIS SKS, SKH etc.                  |                       |                                    |                       |                    |                    |
|                    | $\alpha \leq 15^\circ$                                                              |                       | $\alpha > 15^\circ$                |                       | Depth of cut<br>ap | Depth of cut<br>ae | $\alpha \leq 15^\circ$             |                       | $\alpha > 15^\circ$                |                       | Depth of cut<br>ap | Depth of cut<br>ae | $\alpha \leq 15^\circ$             |                       | $\alpha > 15^\circ$                |                       | Depth of cut<br>ap | Depth of cut<br>ae |
| R<br>RE            | Revolution<br>(min <sup>-1</sup> )                                                  | Feed rate<br>(mm/min) | Revolution<br>(min <sup>-1</sup> ) | Feed rate<br>(mm/min) |                    |                    | Revolution<br>(min <sup>-1</sup> ) | Feed rate<br>(mm/min) | Revolution<br>(min <sup>-1</sup> ) | Feed rate<br>(mm/min) |                    |                    | Revolution<br>(min <sup>-1</sup> ) | Feed rate<br>(mm/min) | Revolution<br>(min <sup>-1</sup> ) | Feed rate<br>(mm/min) |                    |                    |
| <b>R 0.1</b>       | 40000                                                                               | 320                   | 40000                              | 240                   | 0.003              | 0.02               | 40000                              | 320                   | 40000                              | 160                   | 0.003              | 0.02               | 40000                              | 320                   | 40000                              | 160                   | 0.002              | 0.02               |
| <b>R 0.15</b>      | 40000                                                                               | 640                   | 40000                              | 560                   | 0.01               | 0.03               | 40000                              | 640                   | 40000                              | 400                   | 0.007              | 0.03               | 40000                              | 640                   | 40000                              | 400                   | 0.005              | 0.03               |
| <b>R 0.2</b>       | 40000                                                                               | 1600                  | 40000                              | 1200                  | 0.02               | 0.04               | 40000                              | 1400                  | 40000                              | 1000                  | 0.015              | 0.04               | 40000                              | 1200                  | 40000                              | 1000                  | 0.01               | 0.04               |
| <b>R 0.3</b>       | 40000                                                                               | 3200                  | 40000                              | 1600                  | 0.03               | 0.06               | 40000                              | 2800                  | 40000                              | 1200                  | 0.025              | 0.06               | 40000                              | 2000                  | 40000                              | 1200                  | 0.02               | 0.06               |
| <b>R 0.4</b>       | 40000                                                                               | 6400                  | 40000                              | 2400                  | 0.05               | 0.08               | 40000                              | 4000                  | 40000                              | 1600                  | 0.04               | 0.08               | 40000                              | 2800                  | 40000                              | 1600                  | 0.03               | 0.08               |
| <b>R 0.5</b>       | 40000                                                                               | 8000                  | 40000                              | 3200                  | 0.06               | 0.10               | 40000                              | 5600                  | 40000                              | 2400                  | 0.05               | 0.10               | 40000                              | 3600                  | 32000                              | 1300                  | 0.04               | 0.10               |
| <b>R 0.75</b>      | 40000                                                                               | 9600                  | 40000                              | 4000                  | 0.09               | 0.15               | 40000                              | 7200                  | 32000                              | 2500                  | 0.075              | 0.15               | 32000                              | 4500                  | 21000                              | 1200                  | 0.05               | 0.15               |
| <b>R 1</b>         | 40000                                                                               | 9600                  | 39000                              | 4700                  | 0.11               | 0.20               | 40000                              | 8000                  | 24000                              | 2400                  | 0.1                | 0.20               | 24000                              | 3800                  | 16000                              | 1000                  | 0.07               | 0.20               |
| <b>R 1.25</b>      | 40000                                                                               | 10400                 | 32000                              | 4500                  | 0.12               | 0.25               | 37000                              | 8100                  | 19000                              | 2300                  | 0.11               | 0.25               | 19000                              | 3400                  | 13000                              | 1000                  | 0.08               | 0.25               |
| <b>R 1.5</b>       | 40000                                                                               | 12000                 | 27000                              | 4300                  | 0.13               | 0.30               | 32000                              | 7700                  | 16000                              | 2200                  | 0.12               | 0.30               | 16000                              | 3200                  | 11000                              | 880                   | 0.09               | 0.30               |
| <b>R 2</b>         | 32000                                                                               | 10880                 | 20000                              | 3600                  | 0.15               | 0.40               | 24000                              | 6200                  | 12000                              | 1900                  | 0.13               | 0.40               | 12000                              | 2400                  | 8000                               | 800                   | 0.1                | 0.40               |
| <b>R 2.5</b>       | 25000                                                                               | 9000                  | 16000                              | 2900                  | 0.20               | 0.50               | 19000                              | 5300                  | 9600                               | 1700                  | 0.15               | 0.50               | 9600                               | 2100                  | 6000                               | 600                   | 0.1                | 0.50               |
| <b>R 3</b>         | 21000                                                                               | 8400                  | 13000                              | 2600                  | 0.25               | 0.60               | 16000                              | 4800                  | 8000                               | 1600                  | 0.2                | 0.60               | 8000                               | 1700                  | 5000                               | 600                   | 0.11               | 0.60               |
| <b>R 4</b>         | 16000                                                                               | 6400                  | 10000                              | 2000                  | 0.30               | 0.80               | 12000                              | 3600                  | 6000                               | 1200                  | 0.2                | 0.80               | 6000                               | 1400                  | 4000                               | 480                   | 0.11               | 0.80               |
| <b>R 5</b>         | 13000                                                                               | 5200                  | 8000                               | 1700                  | 0.50               | 1.00               | 10000                              | 3200                  | 4800                               | 960                   | 0.2                | 1.00               | 4800                               | 1100                  | 3000                               | 420                   | 0.12               | 1.00               |
| <b>R 6</b>         | 9000                                                                                | 3600                  | 6000                               | 1300                  | 0.50               | 1.20               | 7000                               | 2200                  | 3600                               | 720                   | 0.3                | 1.20               | 3600                               | 860                   | 2200                               | 310                   | 0.12               | 1.20               |
| <b>R 8</b>         | 6000                                                                                | 2400                  | 4000                               | 1000                  | 0.50               | 1.60               | 5000                               | 1600                  | 2500                               | 500                   | 0.3                | 1.60               | 2500                               | 650                   | 1500                               | 240                   | 0.15               | 1.60               |
| <b>R10</b>         | 4500                                                                                | 1800                  | 3000                               | 780                   | 0.50               | 2.00               | 4000                               | 1300                  | 1800                               | 360                   | 0.3                | 2.00               | 1800                               | 470                   | 1000                               | 160                   | 0.15               | 2.00               |
| Depth of cut       |  |                       |                                    |                       |                    |                    |                                    |                       |                                    |                       |                    |                    |                                    |                       |                                    |                       |                    |                    |

Note 1) If the rigidity of the machine or the workpiece materials installation is very low, or chattering and noise are generated, please adjust the revolution, feed rate and depth of cut.

Note 2) If the rigidity of the machine or the work materials installation is very low, or chattering and noise are generated, reduce the revolution and feed rate proportionately.

Note 3)  $\alpha$  is the inclination angle of the machined surface.




# For Machining of Hardened Steel

## VFR2SBF

Ball nose, Short cut length, 2-Flute, For mirror finishing



| Carbon Steel, Alloy Steel, Cast Iron<br>(≤30HRC) | Tool Steel, Pre-Hardened Steel, Hardened Steel<br>(≤45HRC) | Hardened Steel<br>(≤55HRC) | Hardened Steel<br>(>55HRC) | Austenitic<br>Stainless Steel | Titanium Alloy,<br>Heat Resistant Alloy | Copper Alloy | Aluminium Alloy |
|--------------------------------------------------|------------------------------------------------------------|----------------------------|----------------------------|-------------------------------|-----------------------------------------|--------------|-----------------|
|                                                  | ○                                                          | ◎                          | ◎                          |                               |                                         |              |                 |

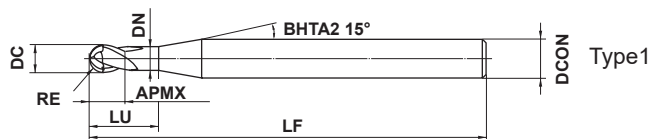

|              |  |  |  |  |
|--------------|--|--|--|--|
| RE ≤ 3       |  |  |  |  |
| ±0.010       |  |  |  |  |
| 4 ≤ DCON ≤ 6 |  |  |  |  |
| 0<br>- 0.005 |  |  |  |  |

● New ball nose geometry for mirror finishing.

| (mm)         |      |     |      |    |      |    |      |           |       |      |
|--------------|------|-----|------|----|------|----|------|-----------|-------|------|
| Order Number | RE   | DC  | APMX | LU | DN   | LF | DCON | *<br>No.F | Stock | Type |
| VFR2SBFR0050 | 0.5  | 1   | 1    | 2  | 0.94 | 45 | 4    | 2         | ●     | 1    |
| VFR2SBFR0075 | 0.75 | 1.5 | 1.5  | 3  | 1.44 | 45 | 4    | 2         | ●     | 1    |
| VFR2SBFR0100 | 1    | 2   | 2    | 4  | 1.9  | 60 | 6    | 2         | ●     | 1    |
| VFR2SBFR0125 | 1.25 | 2.5 | 2.5  | 5  | 2.4  | 60 | 6    | 2         | ●     | 1    |
| VFR2SBFR0150 | 1.5  | 3   | 3    | 6  | 2.9  | 70 | 6    | 2         | ●     | 1    |
| VFR2SBFR0200 | 2    | 4   | 4    | 8  | 3.9  | 70 | 6    | 2         | ●     | 1    |
| VFR2SBFR0250 | 2.5  | 5   | 5    | 10 | 4.9  | 80 | 6    | 2         | ●     | 1    |
| VFR2SBFR0300 | 3    | 6   | 12   | —  | —    | 80 | 6    | 2         | ●     | 2    |

\* Number of Flutes


RE = Corner Radius  
DC = Cutting Dia.  
APMX = Depth of Cut Max.

LU = Usable Length  
DN = Neck Dia.  
LF = Functional Length

DCON = Connection Dia.

## Recommended Cutting Conditions

(mm)

| R<br>RE       | $\alpha \leq 15^\circ$                                                             |                       | $\alpha > 15^\circ$                |                       | Depth of cut<br>ap | Depth of cut<br>ae | $\alpha \leq 15^\circ$             |                       | $\alpha > 15^\circ$                |                       | Depth of cut<br>ap | Depth of cut<br>ae |
|---------------|------------------------------------------------------------------------------------|-----------------------|------------------------------------|-----------------------|--------------------|--------------------|------------------------------------|-----------------------|------------------------------------|-----------------------|--------------------|--------------------|
|               | Revolution<br>(min <sup>-1</sup> )                                                 | Feed rate<br>(mm/min) | Revolution<br>(min <sup>-1</sup> ) | Feed rate<br>(mm/min) |                    |                    | Revolution<br>(min <sup>-1</sup> ) | Feed rate<br>(mm/min) | Revolution<br>(min <sup>-1</sup> ) | Feed rate<br>(mm/min) |                    |                    |
| <b>R 0.5</b>  | 40000                                                                              | 800                   | 40000                              | 800                   | 0.007              | 0.007              | 40000                              | 560                   | 40000                              | 560                   | 0.005              | 0.005              |
| <b>R 0.75</b> | 40000                                                                              | 800                   | 40000                              | 800                   | 0.009              | 0.009              | 40000                              | 560                   | 40000                              | 560                   | 0.007              | 0.007              |
| <b>R 1.0</b>  | 35000                                                                              | 1050                  | 35000                              | 1050                  | 0.011              | 0.011              | 35000                              | 700                   | 35000                              | 700                   | 0.009              | 0.009              |
| <b>R 1.25</b> | 35000                                                                              | 1050                  | 35000                              | 1050                  | 0.013              | 0.013              | 35000                              | 700                   | 35000                              | 700                   | 0.011              | 0.011              |
| <b>R 1.5</b>  | 35000                                                                              | 1050                  | 35000                              | 1050                  | 0.015              | 0.015              | 35000                              | 700                   | 35000                              | 700                   | 0.013              | 0.013              |
| <b>R 2.0</b>  | 25000                                                                              | 1000                  | 25000                              | 1000                  | 0.017              | 0.017              | 25000                              | 750                   | 25000                              | 750                   | 0.015              | 0.015              |
| <b>R 2.5</b>  | 25000                                                                              | 1000                  | 25000                              | 1000                  | 0.020              | 0.020              | 25000                              | 750                   | 25000                              | 750                   | 0.015              | 0.015              |
| <b>R 3.0</b>  | 25000                                                                              | 1000                  | 25000                              | 1000                  | 0.020              | 0.020              | 25000                              | 750                   | 25000                              | 750                   | 0.015              | 0.015              |
| Depth of cut  |  |                       |                                    |                       |                    |                    |                                    |                       |                                    |                       |                    |                    |


Note 1) The tools are recommended for use only when finishing.

Note 2) Air blowing or oil mist are recommended as coolants.

Note 3) Note the following points when using the tools:

- Avoid using equipment abruptly without proper preparation. After sufficiently energizing equipment, ensure that there will be no changes to the depth of cut due to elongation of the main axis during machining etc.
- If the tools are used immediately after rough machining of a surface, large uneven areas (cusp heights) will cause deflection of the tools and waviness of the machined surface. Therefore, it is recommended to add a medium finish machining process which uses the same value of ae as indicated in the table above.

Note 4)  $\alpha$  is the inclination angle of the machined surface.



## VFR2XLB



Ball nose, Long neck, 2-Flute



| Carbon Steel, Alloy Steel, Cast Iron<br>(≤30HRC) | Tool Steel, Pre-Hardened Steel, Hardened Steel<br>(≤45HRC) | Hardened Steel<br>(≤55HRC) | Hardened Steel<br>(>55HRC) | Austenitic<br>Stainless Steel | Titanium Alloy,<br>Heat Resistant Alloy | Copper Alloy | Aluminium Alloy |
|--------------------------------------------------|------------------------------------------------------------|----------------------------|----------------------------|-------------------------------|-----------------------------------------|--------------|-----------------|
|                                                  | ○                                                          | ◎                          | ◎                          |                               |                                         |              |                 |



Effective length  
for inclined angle

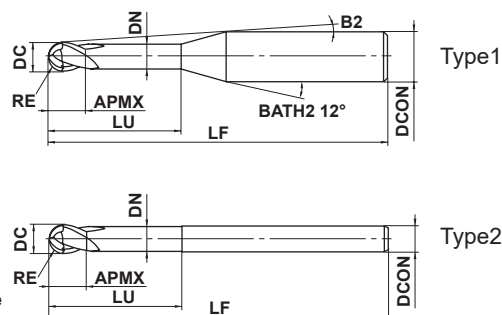

| RE           |  |  |  |  |
|--------------|--|--|--|--|
| ±0.005       |  |  |  |  |
| 4 ≤ DCON ≤ 6 |  |  |  |  |
| 0<br>- 0.005 |  |  |  |  |

- Precise machining of vertical walls is possible due to a back taper and a strong, seamless ball nose cutting edge geometry.

(mm)

| Order Number       | RE   | DC  | APMX | LU  | DN   | B2    | LF | DCON | No.F* | Stock | Type | Effective length<br>for inclined angle |     |     |      |
|--------------------|------|-----|------|-----|------|-------|----|------|-------|-------|------|----------------------------------------|-----|-----|------|
|                    |      |     |      |     |      |       |    |      |       |       |      | 0.5°                                   | 1°  | 2°  | 3°   |
| VFR2XLB0010N005    | 0.1  | 0.2 | 0.15 | 0.5 | 0.18 | 11.5° | 50 | 4    | 2     | ●     | 1    | 0.5                                    | 0.5 | 0.6 | 0.7  |
| VFR2XLB0010N010    | 0.1  | 0.2 | 0.15 | 1   | 0.18 | 10.9° | 50 | 4    | 2     | ●     | 1    | 1                                      | 1.1 | 1.2 | 1.3  |
| VFR2XLB0015N010    | 0.15 | 0.3 | 0.24 | 1   | 0.28 | 10.9° | 50 | 4    | 2     | ●     | 1    | 1                                      | 1.1 | 1.2 | 1.3  |
| VFR2XLB0015N015    | 0.15 | 0.3 | 0.24 | 1.5 | 0.28 | 10.4° | 50 | 4    | 2     | ●     | 1    | 1.6                                    | 1.6 | 1.8 | 2    |
| VFR2XLB0015N020    | 0.15 | 0.3 | 0.24 | 2   | 0.28 | 9.9°  | 50 | 4    | 2     | ●     | 1    | 2.1                                    | 2.2 | 2.4 | 2.6  |
| VFR2XLB0020N010    | 0.2  | 0.4 | 0.3  | 1   | 0.37 | 11°   | 50 | 4    | 2     | ●     | 1    | 1                                      | 1.1 | 1.2 | 1.3  |
| VFR2XLB0020N015    | 0.2  | 0.4 | 0.3  | 1.5 | 0.37 | 10.4° | 50 | 4    | 2     | ●     | 1    | 1.5                                    | 1.6 | 1.7 | 1.9  |
| VFR2XLB0020N020    | 0.2  | 0.4 | 0.3  | 2   | 0.37 | 9.9°  | 50 | 4    | 2     | ●     | 1    | 2.1                                    | 2.2 | 2.3 | 2.6  |
| VFR2XLB0020N025    | 0.2  | 0.4 | 0.3  | 2.5 | 0.37 | 9.5°  | 50 | 4    | 2     | ●     | 1    | 2.6                                    | 2.7 | 2.9 | 3.3  |
| VFR2XLB0020N030    | 0.2  | 0.4 | 0.3  | 3   | 0.37 | 9.1°  | 50 | 4    | 2     | ●     | 1    | 3.1                                    | 3.2 | 3.5 | 3.9  |
| VFR2XLB0020N040    | 0.2  | 0.4 | 0.3  | 4   | 0.37 | 8.4°  | 50 | 4    | 2     | ●     | 1    | 4.2                                    | 4.3 | 4.7 | 5.2  |
| VFR2XLB0025N015    | 0.25 | 0.5 | 0.37 | 1.5 | 0.47 | 10.4° | 50 | 4    | 2     | ●     | 1    | 1.5                                    | 1.6 | 1.7 | 1.9  |
| VFR2XLB0025N020    | 0.25 | 0.5 | 0.37 | 2   | 0.47 | 9.9°  | 50 | 4    | 2     | ●     | 1    | 2.1                                    | 2.1 | 2.3 | 2.6  |
| VFR2XLB0025N025    | 0.25 | 0.5 | 0.37 | 2.5 | 0.47 | 9.5°  | 50 | 4    | 2     | ●     | 1    | 2.6                                    | 2.7 | 2.9 | 3.2  |
| VFR2XLB0025N030    | 0.25 | 0.5 | 0.37 | 3   | 0.47 | 9.1°  | 50 | 4    | 2     | ●     | 1    | 3.1                                    | 3.2 | 3.5 | 3.9  |
| VFR2XLB0025N040    | 0.25 | 0.5 | 0.37 | 4   | 0.47 | 8.3°  | 50 | 4    | 2     | ●     | 1    | 4.1                                    | 4.3 | 4.7 | 5.2  |
| VFR2XLB0030N020    | 0.3  | 0.6 | 0.45 | 2   | 0.57 | 9.9°  | 50 | 4    | 2     | ●     | 1    | 2.1                                    | 2.2 | 2.4 | 2.6  |
| VFR2XLB0030N020S06 | 0.3  | 0.6 | 0.45 | 2   | 0.57 | 10.6° | 50 | 6    | 2     | ●     | 1    | 2.1                                    | 2.2 | 2.4 | 2.6  |
| VFR2XLB0030N030    | 0.3  | 0.6 | 0.45 | 3   | 0.57 | 9°    | 50 | 4    | 2     | ●     | 1    | 3.1                                    | 3.3 | 3.6 | 4    |
| VFR2XLB0030N030S06 | 0.3  | 0.6 | 0.45 | 3   | 0.57 | 9.9°  | 50 | 6    | 2     | ●     | 1    | 3.1                                    | 3.3 | 3.6 | 4    |
| VFR2XLB0030N040    | 0.3  | 0.6 | 0.45 | 4   | 0.57 | 8.2°  | 50 | 4    | 2     | ●     | 1    | 4.2                                    | 4.4 | 4.8 | 5.3  |
| VFR2XLB0030N050    | 0.3  | 0.6 | 0.45 | 5   | 0.57 | 7.6°  | 50 | 4    | 2     | ●     | 1    | 5.2                                    | 5.5 | 6   | 6.6  |
| VFR2XLB0030N060    | 0.3  | 0.6 | 0.45 | 6   | 0.57 | 7.1°  | 50 | 4    | 2     | ●     | 1    | 6.3                                    | 6.6 | 7.2 | 7.9  |
| VFR2XLB0040N030    | 0.4  | 0.8 | 0.6  | 3   | 0.77 | 8.9°  | 50 | 4    | 2     | ●     | 1    | 3.1                                    | 3.3 | 3.6 | 3.9  |
| VFR2XLB0040N040    | 0.4  | 0.8 | 0.6  | 4   | 0.77 | 8.2°  | 50 | 4    | 2     | ●     | 1    | 4.2                                    | 4.4 | 4.8 | 5.2  |
| VFR2XLB0040N060    | 0.4  | 0.8 | 0.6  | 6   | 0.77 | 6.9°  | 50 | 4    | 2     | ●     | 1    | 6.3                                    | 6.5 | 7.2 | 7.9  |
| VFR2XLB0040N080    | 0.4  | 0.8 | 0.6  | 8   | 0.77 | 6°    | 50 | 4    | 2     | ●     | 1    | 8.4                                    | 8.7 | 9.5 | 10.6 |
| VFR2XLB0050N030    | 0.5  | 1   | 0.75 | 3   | 0.96 | 8.7°  | 50 | 4    | 2     | ●     | 1    | 3.2                                    | 3.4 | 3.7 | 4.1  |
| VFR2XLB0050N030S06 | 0.5  | 1   | 0.75 | 3   | 0.96 | 9.8°  | 50 | 6    | 2     | ●     | 1    | 3.2                                    | 3.4 | 3.7 | 4.1  |
| VFR2XLB0050N040    | 0.5  | 1   | 0.75 | 4   | 0.96 | 7.9°  | 50 | 4    | 2     | ●     | 1    | 4.3                                    | 4.5 | 4.9 | 5.4  |
| VFR2XLB0050N040S06 | 0.5  | 1   | 0.75 | 4   | 0.96 | 9.2°  | 50 | 6    | 2     | ●     | 1    | 4.3                                    | 4.5 | 4.9 | 5.4  |
| VFR2XLB0050N060    | 0.5  | 1   | 0.75 | 6   | 0.96 | 6.7°  | 50 | 4    | 2     | ●     | 1    | 6.3                                    | 6.5 | 7.2 | 7.9  |

\* Number of Flutes

(mm)

| Order Number        | RE   | DC  | APMX | LU | DN   | B2   | LF | DCON | No.F* | Stock | Type | Effective length for inclined angle |      |      |      |
|---------------------|------|-----|------|----|------|------|----|------|-------|-------|------|-------------------------------------|------|------|------|
|                     |      |     |      |    |      |      |    |      |       |       |      | 0.5°                                | 1°   | 2°   | 3°   |
| VFR2XLBR0050N060S06 | 0.5  | 1   | 0.75 | 6  | 0.96 | 8.2° | 50 | 6    | 2     | ●     | 1    | 6.3                                 | 6.5  | 7.2  | 7.9  |
| VFR2XLBR0050N080    | 0.5  | 1   | 0.75 | 8  | 0.96 | 5.8° | 50 | 4    | 2     | ●     | 1    | 8.5                                 | 8.9  | 9.7  | 10.7 |
| VFR2XLBR0050N100    | 0.5  | 1   | 0.75 | 10 | 0.96 | 5.1° | 50 | 4    | 2     | ●     | 1    | 10.6                                | 11.1 | 12.1 | 13.4 |
| VFR2XLBR0050N120    | 0.5  | 1   | 0.75 | 12 | 0.96 | 4.6° | 50 | 4    | 2     | ●     | 1    | 12.7                                | 13.2 | 14.5 | 16   |
| VFR2XLBR0075N060    | 0.75 | 1.5 | 1.1  | 6  | 1.44 | 6.3° | 50 | 4    | 2     | ●     | 1    | 6.3                                 | 6.6  | 7.2  | 7.9  |
| VFR2XLBR0075N060S06 | 0.75 | 1.5 | 1.1  | 6  | 1.44 | 8°   | 50 | 6    | 2     | ●     | 1    | 6.3                                 | 6.6  | 7.2  | 7.9  |
| VFR2XLBR0075N080    | 0.75 | 1.5 | 1.1  | 8  | 1.44 | 5.4° | 50 | 4    | 2     | ●     | 1    | 8.4                                 | 8.8  | 9.6  | 10.6 |
| VFR2XLBR0075N080S06 | 0.75 | 1.5 | 1.1  | 8  | 1.44 | 7.2° | 50 | 6    | 2     | ●     | 1    | 8.4                                 | 8.8  | 9.6  | 10.6 |
| VFR2XLBR0075N100    | 0.75 | 1.5 | 1.1  | 10 | 1.44 | 4.7° | 50 | 4    | 2     | ●     | 1    | 10.5                                | 11   | 12   | 13.2 |
| VFR2XLBR0075N120    | 0.75 | 1.5 | 1.1  | 12 | 1.44 | 4.2° | 50 | 4    | 2     | ●     | 1    | 12.6                                | 13.1 | 14.4 | 15.9 |
| VFR2XLBR0075N140    | 0.75 | 1.5 | 1.1  | 14 | 1.44 | 3.8° | 50 | 4    | 2     | ●     | 1    | 14.7                                | 15.3 | 16.8 | 18.5 |
| VFR2XLBR0075N160    | 0.75 | 1.5 | 1.1  | 16 | 1.44 | 3.4° | 60 | 4    | 2     | ●     | 1    | 16.8                                | 17.5 | 19.2 | 21.2 |
| VFR2XLBR0100N060    | 1    | 2   | 1.5  | 6  | 1.94 | 5.8° | 50 | 4    | 2     | ●     | 1    | 6.3                                 | 6.6  | 7.1  | 7.8  |
| VFR2XLBR0100N060S06 | 1    | 2   | 1.5  | 6  | 1.94 | 7.8° | 50 | 6    | 2     | ●     | 1    | 6.3                                 | 6.6  | 7.1  | 7.8  |
| VFR2XLBR0100N080    | 1    | 2   | 1.5  | 8  | 1.94 | 4.8° | 50 | 4    | 2     | ●     | 1    | 8.4                                 | 8.8  | 9.5  | 10.5 |
| VFR2XLBR0100N080S06 | 1    | 2   | 1.5  | 8  | 1.94 | 6.9° | 50 | 6    | 2     | ●     | 1    | 8.4                                 | 8.8  | 9.5  | 10.5 |
| VFR2XLBR0100N100    | 1    | 2   | 1.5  | 10 | 1.94 | 4.2° | 50 | 4    | 2     | ●     | 1    | 10.5                                | 10.9 | 11.9 | 13.1 |
| VFR2XLBR0100N100S06 | 1    | 2   | 1.5  | 10 | 1.94 | 6.2° | 50 | 6    | 2     | ●     | 1    | 10.5                                | 10.9 | 11.9 | 13.1 |
| VFR2XLBR0100N120    | 1    | 2   | 1.5  | 12 | 1.94 | 3.6° | 50 | 4    | 2     | ●     | 1    | 12.6                                | 13.1 | 14.3 | 15.8 |
| VFR2XLBR0100N120S06 | 1    | 2   | 1.5  | 12 | 1.94 | 5.6° | 50 | 6    | 2     | ●     | 1    | 12.6                                | 13.1 | 14.3 | 15.8 |
| VFR2XLBR0100N160    | 1    | 2   | 1.5  | 16 | 1.94 | 2.9° | 60 | 4    | 2     | ●     | 1    | 16.8                                | 17.5 | 19.1 | *    |
| VFR2XLBR0100N160S06 | 1    | 2   | 1.5  | 16 | 1.94 | 4.7° | 60 | 6    | 2     | ●     | 1    | 16.8                                | 17.5 | 19.1 | 21.1 |
| VFR2XLBR0100N200    | 1    | 2   | 1.5  | 20 | 1.94 | 2.4° | 60 | 4    | 2     | ●     | 1    | 20.9                                | 21.8 | 23.9 | *    |
| VFR2XLBR0100N200S06 | 1    | 2   | 1.5  | 20 | 1.94 | 4°   | 60 | 6    | 2     | ●     | 1    | 20.9                                | 21.8 | 23.9 | 26.4 |
| VFR2XLBR0125N100    | 1.25 | 2.5 | 1.9  | 10 | 2.4  | 3.5° | 60 | 4    | 2     | ●     | 1    | 10.4                                | 10.8 | 11.8 | 12.9 |
| VFR2XLBR0125N150    | 1.25 | 2.5 | 1.9  | 15 | 2.4  | 2.5° | 60 | 4    | 2     | ●     | 1    | 15.6                                | 16.3 | 17.8 | *    |
| VFR2XLBR0150N100    | 1.5  | 3   | 2.3  | 10 | 2.9  | 5.5° | 60 | 6    | 2     | ●     | 1    | 10.4                                | 10.8 | 11.7 | 12.9 |
| VFR2XLBR0150N120    | 1.5  | 3   | 2.3  | 12 | 2.9  | 4.9° | 60 | 6    | 2     | ●     | 1    | 12.5                                | 13   | 14.1 | 15.5 |
| VFR2XLBR0150N160    | 1.5  | 3   | 2.3  | 16 | 2.9  | 4°   | 70 | 6    | 2     | ●     | 1    | 16.7                                | 17.3 | 18.9 | 20.8 |
| VFR2XLBR0150N200    | 1.5  | 3   | 2.3  | 20 | 2.9  | 3.4° | 70 | 6    | 2     | ●     | 1    | 20.8                                | 21.7 | 23.7 | 26.1 |
| VFR2XLBR0150N250    | 1.5  | 3   | 2.3  | 25 | 2.9  | 2.8° | 70 | 6    | 2     | ●     | 1    | 26.1                                | 27.2 | 29.7 | *    |
| VFR2XLBR0150N300    | 1.5  | 3   | 2.3  | 30 | 2.9  | 2.5° | 70 | 6    | 2     | ●     | 1    | 31.3                                | 32.6 | 35.7 | *    |
| VFR2XLBR0200N100    | 2    | 4   | 3    | 10 | 3.9  | 4.5° | 70 | 6    | 2     | ●     | 1    | 10.4                                | 10.8 | 11.6 | 12.7 |
| VFR2XLBR0200N120    | 2    | 4   | 3    | 12 | 3.9  | 3.9° | 70 | 6    | 2     | ●     | 1    | 12.5                                | 12.9 | 14   | 15.4 |
| VFR2XLBR0200N160    | 2    | 4   | 3    | 16 | 3.9  | 3.1° | 70 | 6    | 2     | ●     | 1    | 16.6                                | 17.3 | 18.8 | 20.7 |
| VFR2XLBR0200N200    | 2    | 4   | 3    | 20 | 3.9  | 2.6° | 70 | 6    | 2     | ●     | 1    | 20.8                                | 21.7 | 23.6 | *    |
| VFR2XLBR0200N250    | 2    | 4   | 3    | 25 | 3.9  | 2.1° | 70 | 6    | 2     | ●     | 1    | 26                                  | 27.1 | 29.6 | *    |
| VFR2XLBR0200N300    | 2    | 4   | 3    | 30 | 3.9  | 1.8° | 70 | 6    | 2     | ●     | 1    | 31.2                                | 32.6 | *    | *    |
| VFR2XLBR0250N200    | 2.5  | 5   | 3.8  | 20 | 4.9  | 1.5° | 70 | 6    | 2     | ●     | 1    | 20.8                                | 21.6 | *    | *    |
| VFR2XLBR0250N250    | 2.5  | 5   | 3.8  | 25 | 4.9  | 1.2° | 70 | 6    | 2     | ●     | 1    | 26                                  | 27.1 | *    | *    |
| VFR2XLBR0300N180    | 3    | 6   | 6    | 18 | 5.85 | —    | 80 | 6    | 2     | ●     | 2    | *                                   | *    | *    | *    |
| VFR2XLBR0300N300    | 3    | 6   | 6    | 30 | 5.85 | —    | 80 | 6    | 2     | ●     | 2    | *                                   | *    | *    | *    |

\* Number of Flutes

\* No interference

RE = Corner Radius  
DC = Cutting Dia.  
APMX = Depth of Cut Max.

LU = Usable Length  
DN = Neck Dia.  
LF = Functional Length

DCON = Connection Dia.

**VFR2XLB**


Ball nose, Long neck, 2-Flute

**Recommended Cutting Conditions**

(mm)

| Workpiece Material |            | Hardened Steel (45—55HRC)       |                    |                    |                    | Hardened Steel (55—70HRC)       |                    |                    |                    |
|--------------------|------------|---------------------------------|--------------------|--------------------|--------------------|---------------------------------|--------------------|--------------------|--------------------|
|                    |            | Revolution (min <sup>-1</sup> ) | Feed Rate (mm/min) | Depth of Cut $a_p$ | Width of Cut $a_e$ | Revolution (min <sup>-1</sup> ) | Feed Rate (mm/min) | Depth of Cut $a_p$ | Width of Cut $a_e$ |
| <b>0.1</b>         | <b>0.5</b> | 40000                           | 300                | 0.003              | 0.01               | 40000                           | 300                | 0.002              | 0.01               |
| <b>0.1</b>         | <b>1</b>   | 40000                           | 300                | 0.002              | 0.01               | 40000                           | 300                | 0.002              | 0.01               |
| <b>0.15</b>        | <b>1</b>   | 40000                           | 500                | 0.007              | 0.015              | 40000                           | 500                | 0.005              | 0.015              |
| <b>0.15</b>        | <b>1.5</b> | 40000                           | 500                | 0.005              | 0.015              | 40000                           | 500                | 0.003              | 0.015              |
| <b>0.15</b>        | <b>2</b>   | 40000                           | 500                | 0.003              | 0.015              | 40000                           | 500                | 0.002              | 0.015              |
| <b>0.2</b>         | <b>1</b>   | 40000                           | 1400               | 0.015              | 0.02               | 40000                           | 1400               | 0.01               | 0.02               |
| <b>0.2</b>         | <b>1.5</b> | 40000                           | 1000               | 0.01               | 0.02               | 40000                           | 1000               | 0.006              | 0.02               |
| <b>0.2</b>         | <b>2</b>   | 40000                           | 1000               | 0.01               | 0.02               | 40000                           | 1000               | 0.006              | 0.02               |
| <b>0.2</b>         | <b>2.5</b> | 40000                           | 700                | 0.005              | 0.02               | 40000                           | 700                | 0.003              | 0.02               |
| <b>0.2</b>         | <b>3</b>   | 40000                           | 700                | 0.005              | 0.02               | 40000                           | 700                | 0.003              | 0.02               |
| <b>0.2</b>         | <b>4</b>   | 40000                           | 600                | 0.004              | 0.02               | 40000                           | 500                | 0.003              | 0.02               |
| <b>0.25</b>        | <b>1.5</b> | 40000                           | 2000               | 0.02               | 0.025              | 40000                           | 2000               | 0.015              | 0.025              |
| <b>0.25</b>        | <b>2</b>   | 40000                           | 2000               | 0.02               | 0.025              | 40000                           | 2000               | 0.015              | 0.025              |
| <b>0.25</b>        | <b>2.5</b> | 40000                           | 1500               | 0.015              | 0.025              | 40000                           | 1500               | 0.01               | 0.025              |
| <b>0.25</b>        | <b>3</b>   | 40000                           | 1200               | 0.015              | 0.025              | 40000                           | 1200               | 0.01               | 0.025              |
| <b>0.25</b>        | <b>4</b>   | 36000                           | 900                | 0.1                | 0.025              | 36000                           | 900                | 0.007              | 0.025              |
| <b>0.3</b>         | <b>2</b>   | 40000                           | 2800               | 0.03               | 0.03               | 40000                           | 2800               | 0.02               | 0.03               |
| <b>0.3</b>         | <b>3</b>   | 40000                           | 2800               | 0.03               | 0.03               | 40000                           | 2800               | 0.02               | 0.03               |
| <b>0.3</b>         | <b>4</b>   | 35000                           | 2000               | 0.02               | 0.03               | 35000                           | 2000               | 0.015              | 0.03               |
| <b>0.3</b>         | <b>5</b>   | 30000                           | 1000               | 0.01               | 0.03               | 30000                           | 1000               | 0.007              | 0.03               |
| <b>0.3</b>         | <b>6</b>   | 30000                           | 800                | 0.008              | 0.03               | 30000                           | 800                | 0.005              | 0.03               |
| <b>0.4</b>         | <b>3</b>   | 40000                           | 3000               | 0.04               | 0.04               | 40000                           | 3000               | 0.03               | 0.04               |
| <b>0.4</b>         | <b>4</b>   | 40000                           | 3000               | 0.02               | 0.04               | 40000                           | 3000               | 0.015              | 0.04               |
| <b>0.4</b>         | <b>6</b>   | 30000                           | 1600               | 0.02               | 0.04               | 30000                           | 1600               | 0.01               | 0.04               |
| <b>0.4</b>         | <b>8</b>   | 25000                           | 1000               | 0.01               | 0.04               | 25000                           | 1000               | 0.007              | 0.04               |
| <b>0.5</b>         | <b>3</b>   | 40000                           | 4000               | 0.05               | 0.05               | 40000                           | 4000               | 0.04               | 0.05               |
| <b>0.5</b>         | <b>4</b>   | 40000                           | 4000               | 0.05               | 0.05               | 40000                           | 4000               | 0.04               | 0.05               |
| <b>0.5</b>         | <b>6</b>   | 35000                           | 2000               | 0.03               | 0.05               | 35000                           | 2000               | 0.02               | 0.05               |
| <b>0.5</b>         | <b>8</b>   | 30000                           | 1600               | 0.02               | 0.05               | 30000                           | 1600               | 0.01               | 0.05               |
| <b>0.5</b>         | <b>10</b>  | 20000                           | 1000               | 0.01               | 0.05               | 20000                           | 1000               | 0.01               | 0.05               |
| <b>0.5</b>         | <b>12</b>  | 20000                           | 1000               | 0.01               | 0.05               | 20000                           | 800                | 0.008              | 0.05               |
| <b>0.75</b>        | <b>6</b>   | 40000                           | 5000               | 0.07               | 0.075              | 40000                           | 4000               | 0.06               | 0.075              |
| <b>0.75</b>        | <b>8</b>   | 40000                           | 5000               | 0.07               | 0.075              | 40000                           | 3500               | 0.06               | 0.075              |
| <b>0.75</b>        | <b>10</b>  | 40000                           | 4500               | 0.06               | 0.075              | 40000                           | 2400               | 0.06               | 0.075              |
| <b>0.75</b>        | <b>12</b>  | 32000                           | 3400               | 0.04               | 0.075              | 32000                           | 2000               | 0.04               | 0.075              |
| <b>0.75</b>        | <b>14</b>  | 16000                           | 1500               | 0.04               | 0.075              | 16000                           | 1200               | 0.03               | 0.075              |
| <b>0.75</b>        | <b>16</b>  | 13000                           | 1200               | 0.03               | 0.075              | 13000                           | 1200               | 0.02               | 0.075              |
| <b>1</b>           | <b>6</b>   | 40000                           | 6000               | 0.1                | 0.1                | 40000                           | 3400               | 0.1                | 0.1                |
| <b>1</b>           | <b>8</b>   | 40000                           | 5000               | 0.1                | 0.1                | 40000                           | 3000               | 0.1                | 0.1                |
| <b>1</b>           | <b>10</b>  | 40000                           | 5000               | 0.08               | 0.1                | 40000                           | 3000               | 0.07               | 0.1                |
| <b>1</b>           | <b>12</b>  | 40000                           | 5000               | 0.08               | 0.1                | 40000                           | 2600               | 0.05               | 0.1                |
| <b>1</b>           | <b>16</b>  | 32000                           | 3500               | 0.05               | 0.1                | 32000                           | 1700               | 0.03               | 0.1                |
| <b>1</b>           | <b>20</b>  | 10000                           | 1000               | 0.04               | 0.1                | 10000                           | 1000               | 0.03               | 0.1                |
| <b>1.25</b>        | <b>10</b>  | 36000                           | 5000               | 0.12               | 0.25               | 36000                           | 2600               | 0.11               | 0.25               |
| <b>1.25</b>        | <b>15</b>  | 36000                           | 4600               | 0.08               | 0.25               | 36000                           | 2000               | 0.075              | 0.25               |

Depth of Cut



Note 1) When the inclination angle of machined surface is large, or machining with large cutting load such as in a corner area, reduce the revolution and feed rate.


Note 2) If the depth of cut is shallow, the revolution and feed rate can be increased.

Note 3) Cutting conditions may differ considerably due to the tool overhang, depth of cut and machine tool condition. Please use the table above as a reference starting point.

(mm)

| Workpiece Material |           | Hardened Steel (45—55HRC)       |                    |                    |                    | Hardened Steel (55—70HRC)       |                    |                    |                    |
|--------------------|-----------|---------------------------------|--------------------|--------------------|--------------------|---------------------------------|--------------------|--------------------|--------------------|
|                    |           | Revolution (min <sup>-1</sup> ) | Feed Rate (mm/min) | Depth of Cut $a_p$ | Width of Cut $a_e$ | Revolution (min <sup>-1</sup> ) | Feed Rate (mm/min) | Depth of Cut $a_p$ | Width of Cut $a_e$ |
| <b>1.5</b>         | <b>10</b> | 32000                           | 5100               | 0.15               | 0.3                | 32000                           | 2200               | 0.15               | 0.3                |
| <b>1.5</b>         | <b>12</b> | 32000                           | 5100               | 0.13               | 0.3                | 32000                           | 2200               | 0.13               | 0.3                |
| <b>1.5</b>         | <b>16</b> | 32000                           | 4500               | 0.1                | 0.3                | 32000                           | 1800               | 0.1                | 0.3                |
| <b>1.5</b>         | <b>20</b> | 27000                           | 3800               | 0.1                | 0.3                | 27000                           | 1600               | 0.06               | 0.3                |
| <b>1.5</b>         | <b>25</b> | 21000                           | 2700               | 0.08               | 0.3                | 21000                           | 1200               | 0.06               | 0.3                |
| <b>1.5</b>         | <b>30</b> | 9000                            | 1000               | 0.08               | 0.3                | 9000                            | 700                | 0.05               | 0.3                |
| <b>2</b>           | <b>10</b> | 24000                           | 4800               | 0.2                | 0.4                | 24000                           | 2200               | 0.2                | 0.4                |
| <b>2</b>           | <b>12</b> | 24000                           | 4800               | 0.2                | 0.4                | 24000                           | 2200               | 0.2                | 0.4                |
| <b>2</b>           | <b>16</b> | 24000                           | 3800               | 0.15               | 0.4                | 24000                           | 1500               | 0.15               | 0.4                |
| <b>2</b>           | <b>20</b> | 24000                           | 3800               | 0.15               | 0.4                | 24000                           | 1500               | 0.15               | 0.4                |
| <b>2</b>           | <b>25</b> | 24000                           | 3800               | 0.15               | 0.4                | 24000                           | 1100               | 0.1                | 0.4                |
| <b>2</b>           | <b>30</b> | 24000                           | 3000               | 0.1                | 0.4                | 24000                           | 1100               | 0.08               | 0.4                |
| <b>2.5</b>         | <b>20</b> | 19000                           | 3400               | 0.2                | 0.5                | 19000                           | 1400               | 0.2                | 0.5                |
| <b>2.5</b>         | <b>25</b> | 19000                           | 3400               | 0.2                | 0.5                | 19000                           | 1400               | 0.2                | 0.5                |
| <b>3</b>           | <b>18</b> | 16000                           | 3500               | 0.25               | 0.6                | 16000                           | 1000               | 0.2                | 0.6                |
| <b>3</b>           | <b>30</b> | 16000                           | 3500               | 0.2                | 0.6                | 16000                           | 1000               | 0.2                | 0.6                |

Depth of Cut



Note 1) When the inclination angle of machined surface is large, or machining with large cutting load such as in a corner area, reduce the revolution and feed rate.

Note 2) If the depth of cut is shallow, the revolution and feed rate can be increased.

Note 3) Cutting conditions may differ considerably due to the tool overhang, depth of cut and machine tool condition. Please use the table above as a reference starting point.

# For Machining of Hardened Steel

## VFRPSRB

Conner radius, Short cut length, 4-Flute





DC ≤ 1.0 DC ≥ 1.5

| Carbon Steel, Alloy Steel, Cast Iron<br>(≤30HRC) | Tool Steel, Pre-Hardened Steel, Hardened Steel<br>(≤45HRC) | Hardened Steel<br>(≤55HRC) | Hardened Steel<br>(>55HRC) | Austenitic<br>Stainless Steel | Titanium Alloy,<br>Heat Resistant Alloy | Copper Alloy | Aluminium Alloy |
|--------------------------------------------------|------------------------------------------------------------|----------------------------|----------------------------|-------------------------------|-----------------------------------------|--------------|-----------------|
|                                                  | ○                                                          | ◎                          | ◎                          |                               |                                         |              |                 |



Effective length  
for inclined angle

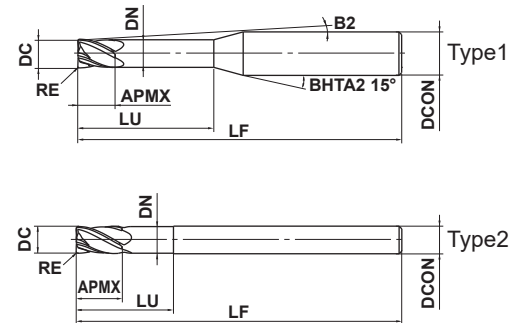

| 0.5 ≤ DC ≤ 6 | 6 < DC ≤ 12   |              |  |  |  |
|--------------|---------------|--------------|--|--|--|
| ±0.005       | ±0.007        |              |  |  |  |
| 0<br>- 0.01  | 0<br>- 0.015  |              |  |  |  |
| DCON=6       | 8 ≤ DCON ≤ 10 | DCON=12      |  |  |  |
| 0<br>- 0.005 | 0<br>- 0.006  | 0<br>- 0.008 |  |  |  |

● Completely seamless curved R edge. DC ≥ 1.5

● The wiper edge and strong back taper achieve high precision machining. 1.5 ≤ DC ≤ 5

(mm)

| Order Number         | DC  | RE   | APMX | LU | DN   | B2   | LF | DCON | No.F* | Stock | Type | Effective length<br>for inclined angle |      |      |      |
|----------------------|-----|------|------|----|------|------|----|------|-------|-------|------|----------------------------------------|------|------|------|
|                      |     |      |      |    |      |      |    |      |       |       |      | 0.5°                                   | 1°   | 2°   | 3°   |
| VFRPSRBD0050R005N020 | 0.5 | 0.05 | 0.5  | 2  | 0.47 | 12.6 | 50 | 6    | 4     | ●     | 1    | 2.1                                    | 2.2  | 2.3  | 2.5  |
| VFRPSRBD0050R010N020 | 0.5 | 0.1  | 0.5  | 2  | 0.47 | 12.7 | 50 | 6    | 4     | ●     | 1    | 2.1                                    | 2.2  | 2.3  | 2.5  |
| VFRPSRBD0060R005N020 | 0.6 | 0.05 | 0.6  | 2  | 0.57 | 12.5 | 50 | 6    | 4     | ●     | 1    | 2.1                                    | 2.2  | 2.4  | 2.6  |
| VFRPSRBD0060R010N020 | 0.6 | 0.1  | 0.6  | 2  | 0.57 | 12.5 | 50 | 6    | 4     | ●     | 1    | 2.1                                    | 2.2  | 2.3  | 2.6  |
| VFRPSRBD0060R010N040 | 0.6 | 0.1  | 0.6  | 4  | 0.57 | 10.8 | 50 | 6    | 4     | ●     | 1    | 4.2                                    | 4.4  | 4.7  | 5.1  |
| VFRPSRBD0060R020N020 | 0.6 | 0.2  | 0.6  | 2  | 0.57 | 12.6 | 50 | 6    | 4     | ●     | 1    | 2.1                                    | 2.2  | 2.2  | 2.6  |
| VFRPSRBD0080R005N040 | 0.8 | 0.05 | 0.8  | 4  | 0.77 | 10.7 | 50 | 6    | 4     | ●     | 1    | 4.2                                    | 4.4  | 4.7  | 5.1  |
| VFRPSRBD0080R010N040 | 0.8 | 0.1  | 0.8  | 4  | 0.77 | 10.7 | 50 | 6    | 4     | ●     | 1    | 4.2                                    | 4.4  | 4.7  | 5.1  |
| VFRPSRBD0080R020N040 | 0.8 | 0.2  | 0.8  | 4  | 0.77 | 10.8 | 50 | 6    | 4     | ●     | 1    | 4.2                                    | 4.4  | 4.7  | 5.1  |
| VFRPSRBD0080R030N040 | 0.8 | 0.3  | 0.8  | 4  | 0.77 | 10.8 | 50 | 6    | 4     | ●     | 1    | 4.2                                    | 4.4  | 4.7  | 5    |
| VFRPSRBD0100R005N040 | 1   | 0.05 | 1    | 4  | 0.96 | 10.4 | 50 | 6    | 4     | ●     | 1    | 4.3                                    | 4.5  | 4.9  | 5.4  |
| VFRPSRBD0100R010N040 | 1   | 0.1  | 1    | 4  | 0.96 | 10.4 | 50 | 6    | 4     | ●     | 1    | 4.3                                    | 4.5  | 4.9  | 5.4  |
| VFRPSRBD0100R010N060 | 1   | 0.1  | 1    | 6  | 0.96 | 9.1  | 50 | 6    | 4     | ●     | 1    | 6.4                                    | 6.7  | 7.3  | 7.9  |
| VFRPSRBD0100R020N040 | 1   | 0.2  | 1    | 4  | 0.96 | 10.5 | 50 | 6    | 4     | ●     | 1    | 4.3                                    | 4.5  | 4.7  | 5.3  |
| VFRPSRBD0100R020N060 | 1   | 0.2  | 1    | 6  | 0.96 | 9.2  | 50 | 6    | 4     | ●     | 1    | 6.4                                    | 6.7  | 7.3  | 7.8  |
| VFRPSRBD0100R030N040 | 1   | 0.3  | 1    | 4  | 0.96 | 10.5 | 50 | 6    | 4     | ●     | 1    | 4.3                                    | 4.5  | 4.6  | 5.3  |
| VFRPSRBD0100R040N040 | 1   | 0.4  | 1    | 4  | 0.96 | 10.6 | 50 | 6    | 4     | ●     | 1    | 4.3                                    | 4.5  | 4.5  | 5.3  |
| VFRPSRBD0150R010N040 | 1.5 | 0.1  | 1.5  | 4  | 1.42 | 10.2 | 50 | 6    | 4     | ●     | 1    | 4.2                                    | 4.4  | 4.8  | 5.2  |
| VFRPSRBD0150R010N060 | 1.5 | 0.1  | 1.5  | 6  | 1.42 | 8.8  | 50 | 6    | 4     | ●     | 1    | 6.3                                    | 6.6  | 7.1  | 7.7  |
| VFRPSRBD0150R010N100 | 1.5 | 0.1  | 1.5  | 10 | 1.42 | 6.9  | 50 | 6    | 4     | ●     | 1    | 10.5                                   | 10.9 | 11.7 | 12.7 |
| VFRPSRBD0150R020N040 | 1.5 | 0.2  | 1.5  | 4  | 1.42 | 10.2 | 50 | 6    | 4     | ●     | 1    | 4.2                                    | 4.4  | 4.6  | 5.2  |
| VFRPSRBD0150R020N060 | 1.5 | 0.2  | 1.5  | 6  | 1.42 | 8.8  | 50 | 6    | 4     | ●     | 1    | 6.3                                    | 6.6  | 7.1  | 7.7  |
| VFRPSRBD0150R020N100 | 1.5 | 0.2  | 1.5  | 10 | 1.42 | 7    | 50 | 6    | 4     | ●     | 1    | 10.5                                   | 10.9 | 11.7 | 12.6 |
| VFRPSRBD0150R030N040 | 1.5 | 0.3  | 1.5  | 4  | 1.42 | 10.3 | 50 | 6    | 4     | ●     | 1    | 4.2                                    | 4.4  | 4.5  | 5.2  |
| VFRPSRBD0150R030N060 | 1.5 | 0.3  | 1.5  | 6  | 1.42 | 8.9  | 50 | 6    | 4     | ●     | 1    | 6.3                                    | 6.6  | 7.1  | 7.6  |
| VFRPSRBD0150R030N100 | 1.5 | 0.3  | 1.5  | 10 | 1.42 | 7    | 50 | 6    | 4     | ●     | 1    | 10.5                                   | 10.9 | 11.7 | 12.6 |
| VFRPSRBD0150R050N040 | 1.5 | 0.5  | 1.5  | 4  | 1.42 | 10.5 | 50 | 6    | 4     | ●     | 1    | 4.2                                    | 4.4  | 4.3  | 5.1  |
| VFRPSRBD0150R050N060 | 1.5 | 0.5  | 1.5  | 6  | 1.42 | 9    | 50 | 6    | 4     | ●     | 1    | 6.3                                    | 6.6  | 7.1  | 7.6  |
| VFRPSRBD0150R050N100 | 1.5 | 0.5  | 1.5  | 10 | 1.42 | 7.1  | 50 | 6    | 4     | ●     | 1    | 10.5                                   | 10.9 | 11.7 | 12.6 |
| VFRPSRBD0200R010N060 | 2   | 0.1  | 2    | 6  | 1.9  | 8.4  | 50 | 6    | 4     | ●     | 1    | 6.3                                    | 6.6  | 7.1  | 7.6  |
| VFRPSRBD0200R010N100 | 2   | 0.1  | 2    | 10 | 1.9  | 6.5  | 50 | 6    | 4     | ●     | 1    | 10.5                                   | 10.9 | 11.7 | 12.6 |
| VFRPSRBD0200R010N150 | 2   | 0.1  | 2    | 15 | 1.9  | 5.1  | 50 | 6    | 4     | ●     | 1    | 15.7                                   | 16.2 | 17.4 | 18.8 |
| VFRPSRBD0200R020N060 | 2   | 0.2  | 2    | 6  | 1.9  | 8.4  | 50 | 6    | 4     | ●     | 1    | 6.3                                    | 6.6  | 7.1  | 7.6  |
| VFRPSRBD0200R020N100 | 2   | 0.2  | 2    | 10 | 1.9  | 6.5  | 50 | 6    | 4     | ●     | 1    | 10.5                                   | 10.9 | 11.7 | 12.6 |

\* Number of Flutes

RE = Corner Radius

DC = Cutting Dia.

APMX = Depth of Cut Max.

LU = Usable Length

DN = Neck Dia.

LF = Functional Length

DCON = Connection Dia.

(mm)

| Order Number         | DC  | RE  | APMX | LU | DN   | B2  | LF | DCON | No.F* | Stock | Type | Effective length for inclined angle |      |      |      |
|----------------------|-----|-----|------|----|------|-----|----|------|-------|-------|------|-------------------------------------|------|------|------|
|                      |     |     |      |    |      |     |    |      |       |       |      | 0.5°                                | 1°   | 2°   | 3°   |
| VFRPSRBD0200R020N150 | 2   | 0.2 | 2    | 15 | 1.9  | 5.1 | 50 | 6    | 4     | ●     | 1    | 15.7                                | 16.2 | 17.4 | 18.8 |
| VFRPSRBD0200R030N060 | 2   | 0.3 | 2    | 6  | 1.9  | 8.5 | 50 | 6    | 4     | ●     | 1    | 6.3                                 | 6.6  | 7    | 7.6  |
| VFRPSRBD0200R030N100 | 2   | 0.3 | 2    | 10 | 1.9  | 6.6 | 50 | 6    | 4     | ●     | 1    | 10.5                                | 10.8 | 11.6 | 12.6 |
| VFRPSRBD0200R030N150 | 2   | 0.3 | 2    | 15 | 1.9  | 5.1 | 50 | 6    | 4     | ●     | 1    | 15.7                                | 16.2 | 17.4 | 18.8 |
| VFRPSRBD0200R030N200 | 2   | 0.3 | 2    | 20 | 1.9  | 4.2 | 60 | 6    | 4     | ●     | 1    | 20.8                                | 21.5 | 23.1 | 25   |
| VFRPSRBD0200R050N060 | 2   | 0.5 | 2    | 6  | 1.9  | 8.6 | 50 | 6    | 4     | ●     | 1    | 6.3                                 | 6.5  | 7    | 7.5  |
| VFRPSRBD0200R050N100 | 2   | 0.5 | 2    | 10 | 1.9  | 6.6 | 50 | 6    | 4     | ●     | 1    | 10.5                                | 10.8 | 11.6 | 12.5 |
| VFRPSRBD0200R050N150 | 2   | 0.5 | 2    | 15 | 1.9  | 5.2 | 50 | 6    | 4     | ●     | 1    | 15.6                                | 16.2 | 17.4 | 18.7 |
| VFRPSRBD0200R050N200 | 2   | 0.5 | 2    | 20 | 1.9  | 4.2 | 60 | 6    | 4     | ●     | 1    | 20.8                                | 21.5 | 23.1 | 24.9 |
| VFRPSRBD0250R030N080 | 2.5 | 0.3 | 2.5  | 8  | 2.35 | 6.9 | 50 | 6    | 4     | ●     | 1    | 8.3                                 | 8.6  | 9.2  | 10   |
| VFRPSRBD0250R030N150 | 2.5 | 0.3 | 2.5  | 15 | 2.35 | 4.7 | 50 | 6    | 4     | ●     | 1    | 15.6                                | 16.1 | 17.3 | 18.7 |
| VFRPSRBD0250R050N080 | 2.5 | 0.5 | 2.5  | 8  | 2.35 | 7   | 50 | 6    | 4     | ●     | 1    | 8.3                                 | 8.6  | 9.2  | 9.9  |
| VFRPSRBD0250R050N150 | 2.5 | 0.5 | 2.5  | 15 | 2.35 | 4.7 | 50 | 6    | 4     | ●     | 1    | 15.6                                | 16.1 | 17.3 | 18.6 |
| VFRPSRBD0250R100N080 | 2.5 | 1   | 2.5  | 8  | 2.35 | 7.3 | 50 | 6    | 4     | ●     | 1    | 8.3                                 | 8.6  | 9.1  | 9.8  |
| VFRPSRBD0300R010N100 | 3   | 0.1 | 3    | 10 | 2.85 | 5.5 | 60 | 6    | 4     | ●     | 1    | 10.4                                | 10.8 | 11.6 | 12.5 |
| VFRPSRBD0300R010N150 | 3   | 0.1 | 3    | 15 | 2.85 | 4.2 | 60 | 6    | 4     | ●     | 1    | 15.6                                | 16.1 | 17.3 | 18.7 |
| VFRPSRBD0300R020N100 | 3   | 0.2 | 3    | 10 | 2.85 | 5.5 | 60 | 6    | 4     | ●     | 1    | 10.4                                | 10.8 | 11.6 | 12.5 |
| VFRPSRBD0300R020N150 | 3   | 0.2 | 3    | 15 | 2.85 | 4.2 | 60 | 6    | 4     | ●     | 1    | 15.6                                | 16.1 | 17.3 | 18.7 |
| VFRPSRBD0300R020N200 | 3   | 0.2 | 3    | 20 | 2.85 | 3.4 | 60 | 6    | 4     | ●     | 1    | 20.7                                | 21.5 | 23.1 | 24.9 |
| VFRPSRBD0300R030N100 | 3   | 0.3 | 3    | 10 | 2.85 | 5.6 | 60 | 6    | 4     | ●     | 1    | 10.4                                | 10.8 | 11.5 | 12.5 |
| VFRPSRBD0300R030N150 | 3   | 0.3 | 3    | 15 | 2.85 | 4.2 | 60 | 6    | 4     | ●     | 1    | 15.6                                | 16.1 | 17.3 | 18.7 |
| VFRPSRBD0300R030N200 | 3   | 0.3 | 3    | 20 | 2.85 | 3.4 | 60 | 6    | 4     | ●     | 1    | 20.7                                | 21.5 | 23   | 24.9 |
| VFRPSRBD0300R050N100 | 3   | 0.5 | 3    | 10 | 2.85 | 5.6 | 60 | 6    | 4     | ●     | 1    | 10.4                                | 10.7 | 11.5 | 12.4 |
| VFRPSRBD0300R050N150 | 3   | 0.5 | 3    | 15 | 2.85 | 4.2 | 60 | 6    | 4     | ●     | 1    | 15.6                                | 16.1 | 17.3 | 18.6 |
| VFRPSRBD0300R050N200 | 3   | 0.5 | 3    | 20 | 2.85 | 3.4 | 60 | 6    | 4     | ●     | 1    | 20.7                                | 21.4 | 23   | 24.8 |
| VFRPSRBD0300R100N100 | 3   | 1   | 3    | 10 | 2.85 | 5.8 | 60 | 6    | 4     | ●     | 1    | 10.4                                | 10.7 | 11.4 | 12.3 |
| VFRPSRBD0300R100N150 | 3   | 1   | 3    | 15 | 2.85 | 4.3 | 60 | 6    | 4     | ●     | 1    | 15.5                                | 16.1 | 17.2 | 18.5 |
| VFRPSRBD0300R100N200 | 3   | 1   | 3    | 20 | 2.85 | 3.5 | 60 | 6    | 4     | ●     | 1    | 20.7                                | 21.4 | 22.9 | 24.7 |
| VFRPSRBD0400R010N120 | 4   | 0.1 | 4    | 12 | 3.85 | 3.6 | 60 | 6    | 4     | ●     | 1    | 12.5                                | 12.9 | 13.9 | 15   |
| VFRPSRBD0400R010N200 | 4   | 0.1 | 4    | 20 | 3.85 | 2.4 | 60 | 6    | 4     | ●     | 1    | 20.7                                | 21.5 | 23.1 | *    |
| VFRPSRBD0400R020N120 | 4   | 0.2 | 4    | 12 | 3.85 | 3.7 | 60 | 6    | 4     | ●     | 1    | 12.5                                | 12.9 | 13.9 | 15   |
| VFRPSRBD0400R020N200 | 4   | 0.2 | 4    | 20 | 3.85 | 2.4 | 60 | 6    | 4     | ●     | 1    | 20.7                                | 21.5 | 23.1 | *    |
| VFRPSRBD0400R030N120 | 4   | 0.3 | 4    | 12 | 3.85 | 3.7 | 60 | 6    | 4     | ●     | 1    | 12.5                                | 12.9 | 13.8 | 15   |
| VFRPSRBD0400R030N200 | 4   | 0.3 | 4    | 20 | 3.85 | 2.4 | 60 | 6    | 4     | ●     | 1    | 20.7                                | 21.5 | 23   | *    |
| VFRPSRBD0400R030N300 | 4   | 0.3 | 4    | 30 | 3.85 | 1.7 | 70 | 6    | 4     | ●     | 1    | 31.1                                | 32.2 | *    | *    |
| VFRPSRBD0400R050N120 | 4   | 0.5 | 4    | 12 | 3.85 | 3.7 | 60 | 6    | 4     | ●     | 1    | 12.5                                | 12.9 | 13.8 | 14.9 |
| VFRPSRBD0400R050N200 | 4   | 0.5 | 4    | 20 | 3.85 | 2.5 | 60 | 6    | 4     | ●     | 1    | 20.7                                | 21.4 | 23   | *    |
| VFRPSRBD0400R050N300 | 4   | 0.5 | 4    | 30 | 3.85 | 1.7 | 70 | 6    | 4     | ●     | 1    | 31.1                                | 32.1 | *    | *    |
| VFRPSRBD0400R100N120 | 4   | 1   | 4    | 12 | 3.85 | 3.8 | 60 | 6    | 4     | ●     | 1    | 12.4                                | 12.8 | 13.7 | 14.8 |
| VFRPSRBD0400R100N200 | 4   | 1   | 4    | 20 | 3.85 | 2.5 | 60 | 6    | 4     | ●     | 1    | 20.7                                | 21.4 | 22.9 | *    |
| VFRPSRBD0400R100N300 | 4   | 1   | 4    | 30 | 3.85 | 1.7 | 70 | 6    | 4     | ●     | 1    | 31.1                                | 32.1 | *    | *    |
| VFRPSRBD0500R050N150 | 5   | 0.5 | 5    | 15 | 4.85 | 1.7 | 60 | 6    | 4     | ●     | 1    | 15.6                                | 16.1 | *    | *    |
| VFRPSRBD0500R100N150 | 5   | 1   | 5    | 15 | 4.85 | 1.8 | 60 | 6    | 4     | ●     | 1    | 15.5                                | 16.1 | *    | *    |
| VFRPSRBD0600R010N180 | 6   | 0.1 | 9    | 18 | 5.85 | —   | 70 | 6    | 4     | ●     | 2    | *                                   | *    | *    | *    |
| VFRPSRBD0600R020N180 | 6   | 0.2 | 9    | 18 | 5.85 | —   | 70 | 6    | 4     | ●     | 2    | *                                   | *    | *    | *    |
| VFRPSRBD0600R030N180 | 6   | 0.3 | 9    | 18 | 5.85 | —   | 70 | 6    | 4     | ●     | 2    | *                                   | *    | *    | *    |
| VFRPSRBD0600R050N180 | 6   | 0.5 | 9    | 18 | 5.85 | —   | 70 | 6    | 4     | ●     | 2    | *                                   | *    | *    | *    |
| VFRPSRBD0600R100N180 | 6   | 1   | 9    | 18 | 5.85 | —   | 70 | 6    | 4     | ●     | 2    | *                                   | *    | *    | *    |
| VFRPSRBD0600R200N180 | 6   | 2   | 9    | 18 | 5.85 | —   | 70 | 6    | 4     | ●     | 2    | *                                   | *    | *    | *    |
| VFRPSRBD0800R020N240 | 8   | 0.2 | 12   | 24 | 7.85 | —   | 90 | 8    | 4     | ●     | 2    | *                                   | *    | *    | *    |
| VFRPSRBD0800R030N240 | 8   | 0.3 | 12   | 24 | 7.85 | —   | 90 | 8    | 4     | ●     | 2    | *                                   | *    | *    | *    |
| VFRPSRBD0800R050N240 | 8   | 0.5 | 12   | 24 | 7.85 | —   | 90 | 8    | 4     | ●     | 2    | *                                   | *    | *    | *    |

\* Number of Flutes

\* No interference

## VFRPSRB

Conner radius, Short cut length, 4-Flute

(mm)

| Order Number         | DC | RE  | APMX | LU | DN   | B2 | LF  | DCON | No.F* | Stock | Type | Effective length for inclined angle |    |    |    |
|----------------------|----|-----|------|----|------|----|-----|------|-------|-------|------|-------------------------------------|----|----|----|
|                      |    |     |      |    |      |    |     |      |       |       |      | 0.5°                                | 1° | 2° | 3° |
| VFRPSRBD0800R100N240 | 8  | 1   | 12   | 24 | 7.85 | —  | 90  | 8    | 4     | ●     | 2    | *                                   | *  | *  | *  |
| VFRPSRBD0800R200N240 | 8  | 2   | 12   | 24 | 7.85 | —  | 90  | 8    | 4     | ●     | 2    | *                                   | *  | *  | *  |
| VFRPSRBD1000R030N300 | 10 | 0.3 | 15   | 30 | 9.7  | —  | 100 | 10   | 4     | ●     | 2    | *                                   | *  | *  | *  |
| VFRPSRBD1000R050N300 | 10 | 0.5 | 15   | 30 | 9.7  | —  | 100 | 10   | 4     | ●     | 2    | *                                   | *  | *  | *  |
| VFRPSRBD1000R100N300 | 10 | 1   | 15   | 30 | 9.7  | —  | 100 | 10   | 4     | ●     | 2    | *                                   | *  | *  | *  |
| VFRPSRBD1000R200N300 | 10 | 2   | 15   | 30 | 9.7  | —  | 100 | 10   | 4     | ●     | 2    | *                                   | *  | *  | *  |
| VFRPSRBD1000R300N300 | 10 | 3   | 15   | 30 | 9.7  | —  | 100 | 10   | 4     | ●     | 2    | *                                   | *  | *  | *  |
| VFRPSRBD1200R050N360 | 12 | 0.5 | 18   | 36 | 11.7 | —  | 110 | 12   | 4     | ●     | 2    | *                                   | *  | *  | *  |
| VFRPSRBD1200R100N360 | 12 | 1   | 18   | 36 | 11.7 | —  | 110 | 12   | 4     | ●     | 2    | *                                   | *  | *  | *  |
| VFRPSRBD1200R200N360 | 12 | 2   | 18   | 36 | 11.7 | —  | 110 | 12   | 4     | ●     | 2    | *                                   | *  | *  | *  |
| VFRPSRBD1200R300N360 | 12 | 3   | 18   | 36 | 11.7 | —  | 110 | 12   | 4     | ●     | 2    | *                                   | *  | *  | *  |

\* Number of Flutes

\* No interference

RE = Corner Radius  
DC = Cutting Dia.  
APMX = Depth of Cut Max.

LU = Usable Length  
DN = Neck Dia.  
LF = Functional Length


DCON = Connection Dia.

## Recommended Cutting Conditions

(mm)

| Workpiece Material |                     |                     | Hardened Steel (45—55HRC)          |                       |                    |                    | Hardened Steel (55—65HRC)          |                       |                    |                    | Hardened Steel (65—70HRC)          |                       |                    |                    |
|--------------------|---------------------|---------------------|------------------------------------|-----------------------|--------------------|--------------------|------------------------------------|-----------------------|--------------------|--------------------|------------------------------------|-----------------------|--------------------|--------------------|
| Dia.<br>DC         | Corner Radius<br>RE | Usable Length<br>LU | Revolution<br>(min <sup>-1</sup> ) | Feed Rate<br>(mm/min) | Depth of Cut<br>ap | Width of Cut<br>ae | Revolution<br>(min <sup>-1</sup> ) | Feed rate<br>(mm/min) | Depth of Cut<br>ap | Width of Cut<br>ae | Revolution<br>(min <sup>-1</sup> ) | Feed rate<br>(mm/min) | Depth of Cut<br>ap | Width of Cut<br>ae |
| 0.5                | 0.05                | 2                   | 25000                              | 1000                  | 0.005              | 0.1                | 19000                              | 760                   | 0.004              | 0.08               | 13000                              | 510                   | 0.003              | 0.08               |
| 0.5                | 0.1                 | 2                   | 25000                              | 1000                  | 0.008              | 0.1                | 19000                              | 760                   | 0.006              | 0.08               | 13000                              | 510                   | 0.005              | 0.08               |
| 0.6                | 0.05                | 2                   | 21000                              | 1000                  | 0.005              | 0.1                | 16000                              | 760                   | 0.004              | 0.08               | 11000                              | 510                   | 0.003              | 0.08               |
| 0.6                | 0.1                 | 2                   | 21000                              | 1000                  | 0.008              | 0.1                | 16000                              | 760                   | 0.006              | 0.08               | 11000                              | 510                   | 0.005              | 0.08               |
| 0.6                | 0.1                 | 4                   | 18000                              | 890                   | 0.006              | 0.1                | 16000                              | 760                   | 0.005              | 0.08               | 11000                              | 510                   | 0.004              | 0.08               |
| 0.6                | 0.2                 | 2                   | 24000                              | 1100                  | 0.01               | 0.1                | 19000                              | 890                   | 0.008              | 0.08               | 16000                              | 760                   | 0.006              | 0.08               |
| 0.8                | 0.05                | 4                   | 16000                              | 760                   | 0.015              | 0.12               | 12000                              | 570                   | 0.01               | 0.1                | 7900                               | 380                   | 0.01               | 0.1                |
| 0.8                | 0.1                 | 4                   | 16000                              | 760                   | 0.02               | 0.12               | 12000                              | 570                   | 0.015              | 0.1                | 7900                               | 380                   | 0.01               | 0.1                |
| 0.8                | 0.2                 | 4                   | 20000                              | 950                   | 0.03               | 0.12               | 16000                              | 760                   | 0.025              | 0.1                | 12000                              | 570                   | 0.02               | 0.1                |
| 0.8                | 0.3                 | 4                   | 20000                              | 950                   | 0.03               | 0.12               | 16000                              | 760                   | 0.025              | 0.1                | 12000                              | 570                   | 0.02               | 0.1                |
| 1                  | 0.05                | 4                   | 13000                              | 1000                  | 0.015              | 0.15               | 9500                               | 760                   | 0.01               | 0.12               | 6400                               | 510                   | 0.01               | 0.12               |
| 1                  | 0.1                 | 4                   | 13000                              | 1000                  | 0.02               | 0.15               | 9500                               | 760                   | 0.015              | 0.12               | 6400                               | 510                   | 0.015              | 0.12               |
| 1                  | 0.1                 | 6                   | 11000                              | 890                   | 0.015              | 0.12               | 6400                               | 510                   | 0.01               | 0.1                | 6400                               | 510                   | 0.01               | 0.1                |
| 1                  | 0.2                 | 4                   | 16000                              | 1300                  | 0.03               | 0.15               | 9500                               | 760                   | 0.025              | 0.12               | 6400                               | 510                   | 0.02               | 0.12               |
| 1                  | 0.2                 | 6                   | 13000                              | 1000                  | 0.02               | 0.12               | 6400                               | 510                   | 0.02               | 0.1                | 6400                               | 510                   | 0.015              | 0.1                |
| 1                  | 0.3                 | 4                   | 16000                              | 1300                  | 0.03               | 0.15               | 9500                               | 760                   | 0.025              | 0.12               | 6400                               | 510                   | 0.02               | 0.12               |
| 1                  | 0.4                 | 4                   | 16000                              | 1300                  | 0.04               | 0.15               | 9500                               | 760                   | 0.03               | 0.12               | 6400                               | 510                   | 0.025              | 0.12               |
| 1.5                | 0.1                 | 4                   | 14000                              | 1700                  | 0.025              | 0.23               | 11000                              | 920                   | 0.015              | 0.2                | 7200                               | 570                   | 0.01               | 0.2                |
| 1.5                | 0.1                 | 6                   | 11000                              | 1400                  | 0.025              | 0.18               | 9200                               | 730                   | 0.015              | 0.16               | 5700                               | 460                   | 0.01               | 0.16               |
| 1.5                | 0.1                 | 10                  | 11000                              | 1400                  | 0.025              | 0.18               | 9200                               | 730                   | 0.015              | 0.16               | 5700                               | 460                   | 0.01               | 0.16               |
| 1.5                | 0.2                 | 4                   | 14000                              | 1700                  | 0.05               | 0.23               | 11000                              | 920                   | 0.035              | 0.2                | 7200                               | 570                   | 0.025              | 0.2                |
| 1.5                | 0.2                 | 6                   | 11000                              | 1400                  | 0.05               | 0.18               | 9200                               | 730                   | 0.035              | 0.16               | 5700                               | 460                   | 0.025              | 0.16               |
| 1.5                | 0.2                 | 10                  | 11000                              | 1400                  | 0.05               | 0.18               | 9200                               | 730                   | 0.035              | 0.16               | 5700                               | 460                   | 0.025              | 0.16               |
| 1.5                | 0.3                 | 4                   | 16000                              | 1900                  | 0.075              | 0.23               | 13000                              | 1000                  | 0.05               | 0.2                | 8000                               | 640                   | 0.035              | 0.2                |
| 1.5                | 0.3                 | 6                   | 13000                              | 1500                  | 0.075              | 0.18               | 10000                              | 810                   | 0.05               | 0.16               | 6400                               | 510                   | 0.035              | 0.16               |
| 1.5                | 0.3                 | 10                  | 13000                              | 1500                  | 0.075              | 0.18               | 10000                              | 810                   | 0.05               | 0.16               | 6400                               | 510                   | 0.035              | 0.16               |
| 1.5                | 0.5                 | 4                   | 16000                              | 1900                  | 0.08               | 0.23               | 13000                              | 1000                  | 0.055              | 0.2                | 8000                               | 640                   | 0.04               | 0.2                |
| 1.5                | 0.5                 | 6                   | 13000                              | 1500                  | 0.08               | 0.18               | 10000                              | 810                   | 0.055              | 0.16               | 6400                               | 510                   | 0.04               | 0.16               |
| 1.5                | 0.5                 | 10                  | 13000                              | 1500                  | 0.08               | 0.18               | 10000                              | 810                   | 0.055              | 0.16               | 6400                               | 510                   | 0.04               | 0.16               |
| 2                  | 0.1                 | 6                   | 11000                              | 1700                  | 0.025              | 0.3                | 8600                               | 1000                  | 0.02               | 0.28               | 5400                               | 640                   | 0.015              | 0.28               |
| 2                  | 0.1                 | 10                  | 8600                               | 1400                  | 0.025              | 0.24               | 6900                               | 830                   | 0.02               | 0.22               | 4300                               | 520                   | 0.015              | 0.22               |
| 2                  | 0.1                 | 15                  | 6400                               | 1000                  | 0.02               | 0.18               | 5200                               | 620                   | 0.015              | 0.17               | 3200                               | 390                   | 0.01               | 0.17               |
| 2                  | 0.2                 | 6                   | 11000                              | 1700                  | 0.055              | 0.3                | 8600                               | 1000                  | 0.035              | 0.28               | 5400                               | 640                   | 0.025              | 0.28               |
| 2                  | 0.2                 | 10                  | 8600                               | 1400                  | 0.055              | 0.24               | 6900                               | 830                   | 0.035              | 0.22               | 4300                               | 520                   | 0.025              | 0.22               |
| 2                  | 0.2                 | 15                  | 6400                               | 1000                  | 0.04               | 0.18               | 5200                               | 620                   | 0.025              | 0.17               | 3200                               | 390                   | 0.02               | 0.16               |
| 2                  | 0.3                 | 6                   | 12000                              | 1900                  | 0.08               | 0.3                | 6900                               | 1100                  | 0.055              | 0.28               | 6000                               | 420                   | 0.04               | 0.27               |
| 2                  | 0.3                 | 10                  | 9500                               | 1500                  | 0.08               | 0.24               | 7600                               | 920                   | 0.055              | 0.22               | 4800                               | 570                   | 0.04               | 0.22               |
| 2                  | 0.3                 | 15                  | 7200                               | 1100                  | 0.065              | 0.18               | 5700                               | 690                   | 0.045              | 0.17               | 3600                               | 430                   | 0.03               | 0.16               |
| 2                  | 0.3                 | 20                  | 7200                               | 1100                  | 0.065              | 0.18               | 5700                               | 690                   | 0.045              | 0.17               | 3600                               | 430                   | 0.03               | 0.16               |
| 2                  | 0.5                 | 6                   | 12000                              | 1900                  | 0.085              | 0.3                | 9500                               | 1100                  | 0.06               | 0.28               | 6000                               | 720                   | 0.04               | 0.27               |
| 2                  | 0.5                 | 10                  | 9500                               | 1500                  | 0.085              | 0.24               | 7600                               | 920                   | 0.06               | 0.22               | 4800                               | 570                   | 0.04               | 0.22               |
| 2                  | 0.5                 | 15                  | 7200                               | 1100                  | 0.07               | 0.18               | 5700                               | 690                   | 0.045              | 0.17               | 3600                               | 430                   | 0.035              | 0.16               |
| 2                  | 0.5                 | 20                  | 7200                               | 1100                  | 0.07               | 0.18               | 5700                               | 690                   | 0.045              | 0.17               | 3600                               | 430                   | 0.035              | 0.16               |
| 2.5                | 0.3                 | 8                   | 9500                               | 1900                  | 0.08               | 0.38               | 7600                               | 1400                  | 0.055              | 0.35               | 4800                               | 860                   | 0.04               | 0.34               |
| 2.5                | 0.3                 | 15                  | 7600                               | 1500                  | 0.08               | 0.3                | 6100                               | 1100                  | 0.055              | 0.28               | 3800                               | 690                   | 0.04               | 0.27               |
| 2.5                | 0.5                 | 8                   | 9500                               | 1900                  | 0.09               | 0.38               | 7600                               | 1400                  | 0.06               | 0.35               | 4800                               | 860                   | 0.04               | 0.34               |
| 2.5                | 0.5                 | 15                  | 7600                               | 1500                  | 0.09               | 0.3                | 6100                               | 1100                  | 0.06               | 0.28               | 3800                               | 690                   | 0.04               | 0.27               |
| 2.5                | 1                   | 8                   | 9500                               | 1900                  | 0.15               | 0.33               | 7600                               | 1400                  | 0.09               | 0.31               | 4800                               | 860                   | 0.065              | 0.31               |

Depth of Cut



Note 1) The cutting conditions above are a guide only to machining with cutting edges with a corner radius. When machining with peripheral cutting edges, use the minimum feed rate as a guide.

Note 2) If depth of cut is shallow, the revolution and feed rate can be increased.

Note 3) For profile machining such as moulds, machining conditions may differ considerably depending on the workpiece geometry, machining methods and depth of cut. Reduce the feed rate especially when machining the corner sections of a workpiece.

Note 4) If the rigidity of the machine or the workpiece materials installation is very low, or chattering and noise are generated, please adjust the revolution, feed rate and depth of cut.


## VFRPSRB

Conner radius, Short cut length, 4-Flute

(mm)

| Workpiece Material |     |    | Hardened Steel (45—55HRC)          |                       |                    |                    | Hardened Steel (55—65HRC)          |                       |                    |                    | Hardened Steel (65—70HRC)          |                       |                    |                    |
|--------------------|-----|----|------------------------------------|-----------------------|--------------------|--------------------|------------------------------------|-----------------------|--------------------|--------------------|------------------------------------|-----------------------|--------------------|--------------------|
|                    |     |    | Revolution<br>(min <sup>-1</sup> ) | Feed Rate<br>(mm/min) | Depth of Cut<br>ap | Width of Cut<br>ae | Revolution<br>(min <sup>-1</sup> ) | Feed rate<br>(mm/min) | Depth of Cut<br>ap | Width of Cut<br>ae | Revolution<br>(min <sup>-1</sup> ) | Feed rate<br>(mm/min) | Depth of Cut<br>ap | Width of Cut<br>ae |
| 3                  | 0.1 | 10 | 8100                               | 1900                  | 0.025              | 0.6                | 6500                               | 1200                  | 0.02               | 0.55               | 4100                               | 730                   | 0.015              | 0.55               |
| 3                  | 0.1 | 15 | 6500                               | 1600                  | 0.025              | 0.48               | 5200                               | 940                   | 0.02               | 0.44               | 3200                               | 580                   | 0.015              | 0.44               |
| 3                  | 0.2 | 10 | 8100                               | 1900                  | 0.055              | 0.6                | 6500                               | 1200                  | 0.04               | 0.55               | 4100                               | 730                   | 0.025              | 0.55               |
| 3                  | 0.2 | 15 | 6500                               | 1600                  | 0.055              | 0.48               | 5200                               | 940                   | 0.04               | 0.44               | 3200                               | 580                   | 0.025              | 0.44               |
| 3                  | 0.2 | 20 | 6500                               | 1600                  | 0.055              | 0.48               | 5200                               | 940                   | 0.04               | 0.44               | 3200                               | 580                   | 0.025              | 0.44               |
| 3                  | 0.3 | 10 | 9000                               | 2200                  | 0.085              | 0.6                | 7200                               | 1300                  | 0.055              | 0.55               | 4500                               | 810                   | 0.04               | 0.55               |
| 3                  | 0.3 | 15 | 7200                               | 1700                  | 0.085              | 0.48               | 5800                               | 1000                  | 0.055              | 0.44               | 3600                               | 650                   | 0.04               | 0.44               |
| 3                  | 0.3 | 20 | 7200                               | 1700                  | 0.085              | 0.48               | 5800                               | 1000                  | 0.055              | 0.44               | 3600                               | 650                   | 0.04               | 0.44               |
| 3                  | 0.5 | 10 | 9000                               | 2200                  | 0.09               | 0.6                | 7200                               | 1300                  | 0.06               | 0.55               | 4500                               | 810                   | 0.045              | 0.55               |
| 3                  | 0.5 | 15 | 7200                               | 1700                  | 0.09               | 0.48               | 5800                               | 1000                  | 0.06               | 0.44               | 3600                               | 650                   | 0.045              | 0.44               |
| 3                  | 0.5 | 20 | 7200                               | 1700                  | 0.09               | 0.48               | 5800                               | 1000                  | 0.06               | 0.44               | 3600                               | 650                   | 0.045              | 0.44               |
| 3                  | 1   | 10 | 9000                               | 2200                  | 0.15               | 0.54               | 7200                               | 1300                  | 0.1                | 0.5                | 4500                               | 810                   | 0.07               | 0.5                |
| 3                  | 1   | 15 | 7200                               | 1700                  | 0.15               | 0.43               | 5800                               | 1000                  | 0.1                | 0.4                | 3600                               | 650                   | 0.07               | 0.4                |
| 3                  | 1   | 20 | 7200                               | 2000                  | 0.15               | 0.43               | 5800                               | 1000                  | 0.1                | 0.4                | 3600                               | 650                   | 0.07               | 0.4                |
| 4                  | 0.1 | 12 | 6100                               | 1700                  | 0.25               | 0.8                | 4900                               | 970                   | 0.02               | 0.74               | 3000                               | 610                   | 0.015              | 0.73               |
| 4                  | 0.1 | 20 | 4900                               | 1400                  | 0.25               | 0.6                | 3900                               | 780                   | 0.02               | 0.6                | 2400                               | 490                   | 0.015              | 0.58               |
| 4                  | 0.2 | 12 | 6100                               | 1700                  | 0.055              | 0.8                | 4900                               | 970                   | 0.04               | 0.74               | 3000                               | 610                   | 0.025              | 0.73               |
| 4                  | 0.2 | 20 | 4900                               | 1400                  | 0.055              | 0.6                | 3900                               | 780                   | 0.04               | 0.6                | 2400                               | 490                   | 0.025              | 0.58               |
| 4                  | 0.3 | 12 | 6800                               | 1900                  | 0.085              | 0.8                | 5400                               | 1100                  | 0.055              | 0.75               | 3400                               | 680                   | 0.04               | 0.73               |
| 4                  | 0.3 | 20 | 5400                               | 1500                  | 0.085              | 0.6                | 4300                               | 870                   | 0.055              | 0.6                | 2700                               | 540                   | 0.04               | 0.58               |
| 4                  | 0.3 | 30 | 4100                               | 1100                  | 0.065              | 0.5                | 3200                               | 650                   | 0.045              | 0.45               | 2000                               | 410                   | 0.035              | 0.44               |
| 4                  | 0.5 | 12 | 6800                               | 1900                  | 0.09               | 0.8                | 5400                               | 1100                  | 0.06               | 0.75               | 3400                               | 680                   | 0.045              | 0.74               |
| 4                  | 0.5 | 20 | 5400                               | 1500                  | 0.09               | 0.65               | 4300                               | 870                   | 0.06               | 0.6                | 2700                               | 540                   | 0.045              | 0.58               |
| 4                  | 0.5 | 30 | 4100                               | 1100                  | 0.075              | 0.5                | 4300                               | 650                   | 0.05               | 0.45               | 2000                               | 410                   | 0.035              | 0.44               |
| 4                  | 1   | 12 | 6800                               | 1900                  | 0.15               | 0.7                | 5400                               | 1100                  | 0.1                | 0.66               | 3400                               | 680                   | 0.07               | 0.66               |
| 4                  | 1   | 20 | 5400                               | 1500                  | 0.15               | 0.55               | 4300                               | 870                   | 0.1                | 0.53               | 2700                               | 540                   | 0.07               | 0.53               |
| 4                  | 1   | 30 | 4100                               | 1100                  | 0.1                | 0.4                | 3200                               | 650                   | 0.075              | 0.4                | 2000                               | 410                   | 0.055              | 0.4                |
| 5                  | 0.5 | 15 | 6400                               | 1800                  | 0.1                | 1.3                | 5100                               | 1000                  | 0.065              | 1.2                | 3200                               | 640                   | 0.045              | 1.1                |
| 5                  | 1   | 15 | 6400                               | 1800                  | 0.15               | 1.1                | 5100                               | 1000                  | 0.1                | 1                  | 3200                               | 640                   | 0.075              | 1                  |
| 6                  | 0.1 | 18 | 4800                               | 1500                  | 0.03               | 1.5                | 3800                               | 920                   | 0.02               | 1.4                | 2400                               | 570                   | 0.015              | 1.3                |
| 6                  | 0.2 | 18 | 4800                               | 1500                  | 0.06               | 1.5                | 3800                               | 920                   | 0.04               | 1.4                | 2400                               | 570                   | 0.03               | 1.3                |
| 6                  | 0.3 | 18 | 5300                               | 1700                  | 0.09               | 1.5                | 4200                               | 1000                  | 0.06               | 1.4                | 2700                               | 640                   | 0.045              | 1.3                |
| 6                  | 0.5 | 18 | 5300                               | 1700                  | 0.1                | 1.5                | 4200                               | 1000                  | 0.065              | 1.4                | 2700                               | 640                   | 0.045              | 1.3                |
| 6                  | 1   | 18 | 5300                               | 1700                  | 0.15               | 1.4                | 4200                               | 1000                  | 0.1                | 1.2                | 2700                               | 640                   | 0.075              | 1.2                |
| 6                  | 2   | 18 | 5300                               | 1700                  | 0.3                | 1.3                | 4200                               | 1000                  | 0.2                | 1.1                | 2700                               | 640                   | 0.15               | 1.1                |
| 8                  | 0.2 | 24 | 3600                               | 1100                  | 0.06               | 2                  | 2900                               | 690                   | 0.04               | 1.8                | 1800                               | 430                   | 0.03               | 1.8                |
| 8                  | 0.3 | 24 | 4000                               | 1300                  | 0.09               | 2                  | 3200                               | 760                   | 0.06               | 1.8                | 2000                               | 480                   | 0.045              | 1.8                |
| 8                  | 0.5 | 24 | 4000                               | 1300                  | 0.095              | 2                  | 3200                               | 760                   | 0.065              | 1.8                | 2000                               | 480                   | 0.045              | 1.8                |
| 8                  | 1   | 24 | 4000                               | 1300                  | 0.15               | 1.8                | 3200                               | 760                   | 0.1                | 1.7                | 2000                               | 480                   | 0.075              | 1.6                |
| 8                  | 2   | 24 | 4000                               | 1300                  | 0.3                | 1.7                | 3200                               | 760                   | 0.2                | 1.6                | 2000                               | 480                   | 0.15               | 1.5                |
| 10                 | 0.3 | 30 | 3200                               | 1000                  | 0.09               | 2.5                | 2500                               | 610                   | 0.06               | 2.3                | 1600                               | 380                   | 0.045              | 2.3                |
| 10                 | 0.5 | 30 | 3200                               | 1000                  | 0.095              | 2.5                | 2500                               | 610                   | 0.065              | 2.3                | 1600                               | 380                   | 0.045              | 2.3                |
| 10                 | 1   | 30 | 3200                               | 1000                  | 0.15               | 2.3                | 2500                               | 610                   | 0.1                | 2.1                | 1600                               | 380                   | 0.075              | 2                  |
| 10                 | 2   | 30 | 3200                               | 1000                  | 0.3                | 2.1                | 2500                               | 610                   | 0.2                | 2                  | 1600                               | 380                   | 0.15               | 1.9                |
| 10                 | 3   | 30 | 3200                               | 1000                  | 0.45               | 1.9                | 2500                               | 610                   | 0.3                | 1.7                | 1600                               | 380                   | 0.2                | 1.7                |
| 12                 | 0.5 | 36 | 2700                               | 950                   | 0.1                | 3                  | 2100                               | 510                   | 0.065              | 2.8                | 1300                               | 320                   | 0.05               | 2.7                |
| 12                 | 1   | 36 | 2700                               | 950                   | 0.15               | 2.7                | 2100                               | 510                   | 0.1                | 2.5                | 1300                               | 320                   | 0.075              | 2.4                |
| 12                 | 2   | 36 | 2700                               | 950                   | 0.3                | 2.6                | 2100                               | 510                   | 0.2                | 2.4                | 1300                               | 320                   | 0.15               | 2.3                |
| 12                 | 3   | 36 | 2700                               | 950                   | 0.45               | 2.3                | 2100                               | 510                   | 0.3                | 2.1                | 1300                               | 320                   | 0.2                | 2                  |

Depth of Cut



[illegible]




---

# Revolutionary Machining of Hardened Steel

---

## VFR2SSB/VFR2SB

Ball Nose End Mill, 2-Flute

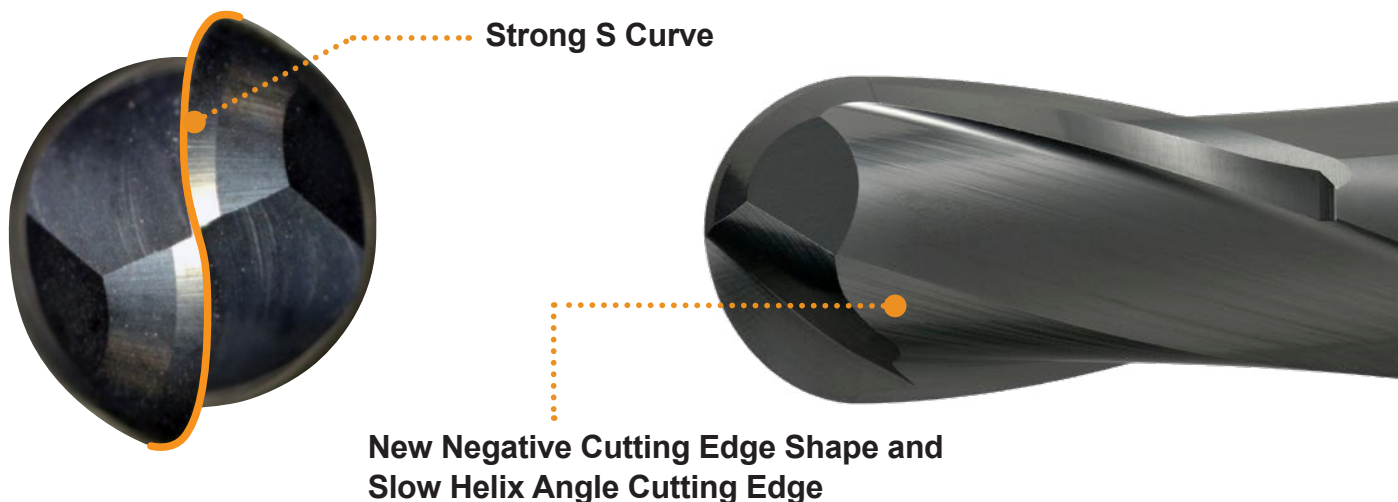

New Cutting Edge : Optimisation of the flute geometry, helix and rake angles have improved the edge strength in all areas.

Carbide Substrate : High grade carbide ideal for machining hardened materials.

---


## VFR2SBF

Ball Nose End Mill, For mirror finishing, 2-Flute



## Cutting Example


### VFR2SB



**ASP23  
(62HRC)**




**AISI M2  
(64HRC)**




**HAP72  
(68HRC)**

<Cutting Conditions>  
 Workpiece Material : High Speed Steel  
 50 mm x 50 mm x 30 mm  
 Tool : VFR2SBR0300  
 Cutting Mode : Air Blow  
 Machine : Vertical MC

#### Rough Machining Path

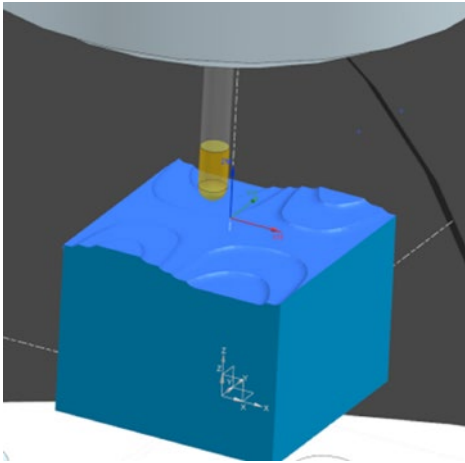

#### Medium and Finish Machining Path (Tilt Angle 30°)

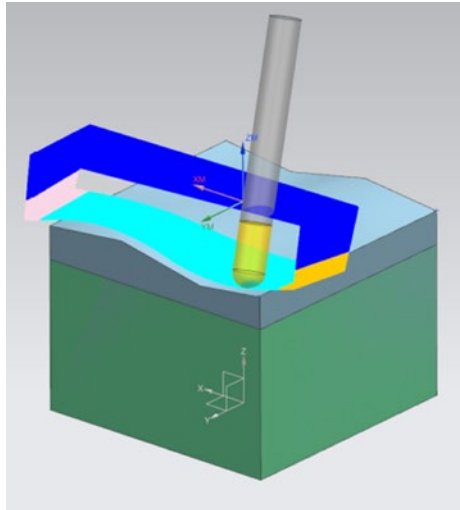


**Cutting Time : 234 min  
Tools Used : 4**


| (mm)                    |              |                           |                |      |       |                        |                         |                    |
|-------------------------|--------------|---------------------------|----------------|------|-------|------------------------|-------------------------|--------------------|
| Process                 | RE           | n<br>(min <sup>-1</sup> ) | vf<br>(mm/min) | ap   | ae    | Finishing<br>Allowance | Cutting Time<br>(h:m:s) | Number of<br>Tools |
| Rough Machining         | <b>R 3.0</b> | 12000                     | 1600           | 0.35 | 1.0   | 0.2                    | 1:01:45                 | 2                  |
| Medium Finish Machining | <b>R 3.0</b> | 8000                      | 500            | 0.3  | 0.1   | 0.05                   | 0:49:15                 | 1                  |
| Finish Machining        | <b>R 3.0</b> | 12000                     | 700            | 0.1  | 0.035 | —                      | 2:03:19                 | 1                  |

# VFR2SBF


Workpiece : Pre-hardened Steel

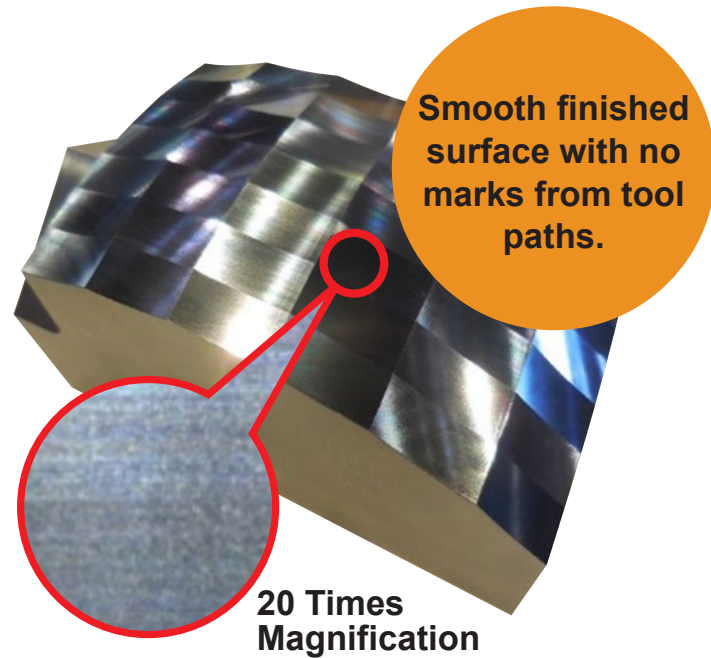


By using 5-axis machining, cutting at the tip of the ball nose can be avoided

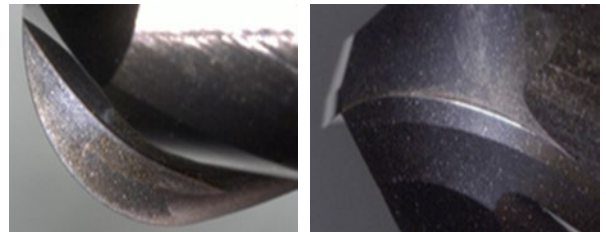

Excellent tool conditions after 31 hours of finish machining.



A surface roughness of Rz: 0.8 $\mu$ m or lower can be achieved.

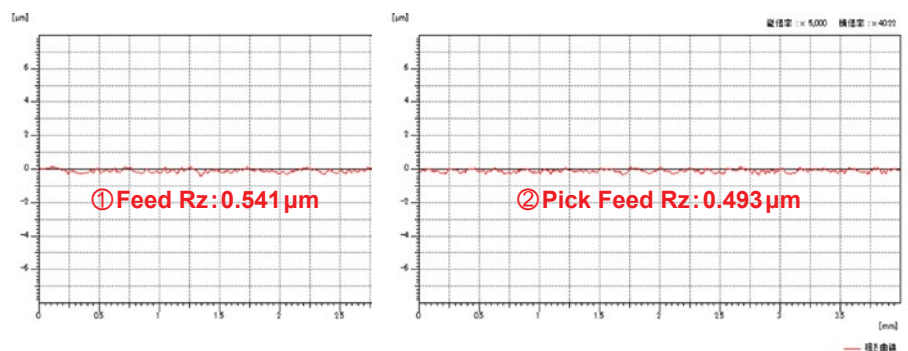

## Cutting Conditions

Holder : HSK-A63


(mm)

| Process                                  | Order Number     | Coolant  | n<br>( $\text{min}^{-1}$ ) | vc<br>(m/min) | vf<br>(mm/min) | fz<br>(mm/t.) | ap                          | ae     | Finishing Allowance | Cutting Time (h : m) |
|------------------------------------------|------------------|----------|----------------------------|---------------|----------------|---------------|-----------------------------|--------|---------------------|----------------------|
| Rough Machining<br>Side Finish Machining | VQMHVRBD1600R500 | Air Blow | 3000<br>2000               | 150<br>100    | 1800<br>240    | 0.15<br>0.03  | 32<br>—                     | 1<br>— | 0.2<br>0            | 0:24                 |
| Chamfer and Medium<br>Finish Machining   | MP2SBR0300       | Air Blow | 13000                      | 245           | 2600           | 0.1           | Along the Surface<br>p0.1   |        | 0.03                | 0:46                 |
| Finish Machining                         | VFR2SBFR0300     | MQL      | 20000                      | 375           | 600            | 0.015         | Along the Surface<br>p0.015 |        | 0                   | 31:10                |

Precision-Corner Radius End Mill, 4-Flute

# VFRPSRB

A seamless edge geometry that is resistant to chipping, together with a wiper edge and strong back taper enables high precision machining.

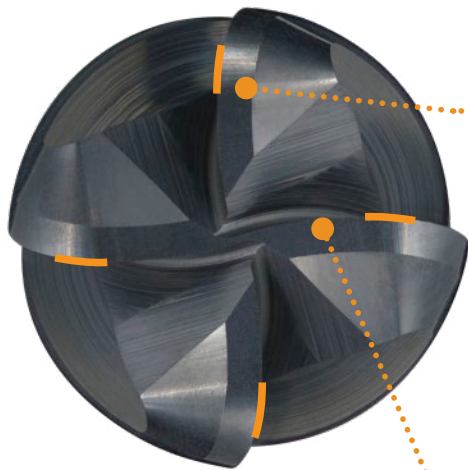

Equipped with a wiper edge of  $DC \geq 1.5 \text{ mm}$

Improves the surface finish of the bottom machined face.

Optimal Seamless Shape of  $DC \geq 1.5 \text{ mm}$

Suppresses chipping.




Strong Back Taper of  $1.5 \leq DC \leq 5 \text{ mm}$

Reduces chatter and vibration when machining vertical walls.

## High Precision Corner Radius Accuracy

The corner radius of VFRPSRB is measured as follows, based on the absolute centre of the corner radius.

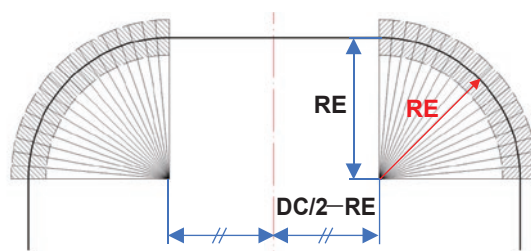

DC : Cutting Dia.  
RE : Corner Radius

**VFRPSRB**

$0.5 \leq DC \leq 6 \text{ mm} : \pm 0.005$   
 $8 \leq DC \leq 12 \text{ mm} : \pm 0.007$

Conventional Precision Radius  $\pm 0.01$


---

## Completely Seamless Curved R Edge, $DC \geq 1.5\text{mm}$

---


A stable machining surface is achieved by a seamless blend between the radius and flank geometry.

**VFRPSRB**

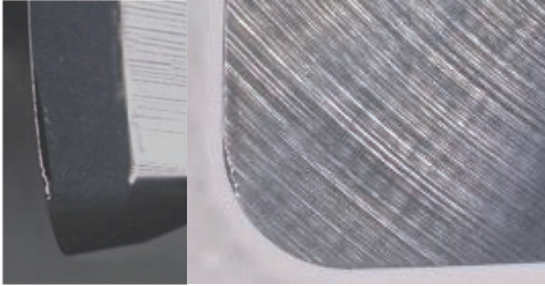

Due to the seamless geometry, chipping is suppressed and wear progress is stabilised.

Conventional

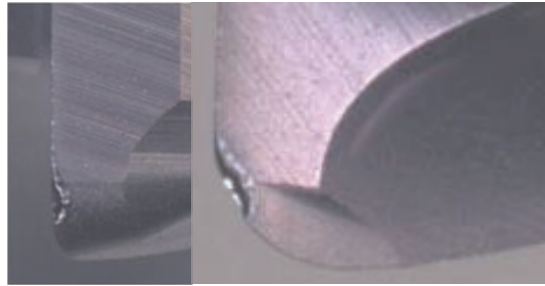


Chipping occurs because the stress is concentrated on the joint between the flank and corner edge geometry.

## Equipped with a Wiper Edge, $DC \geq 1.5\text{mm}$



---

A smooth surface finish is possible by utilising a wiper edge.

**VFRPSRB**

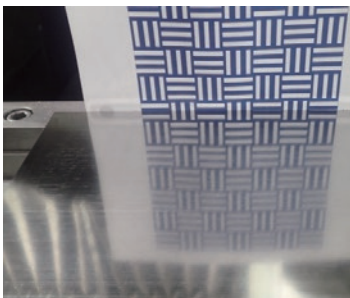



Conventional

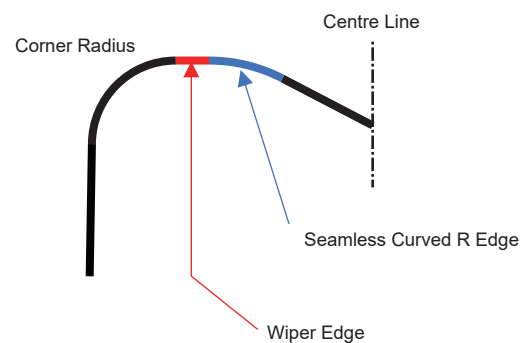

## Cutting Performance

### Wear Resistance Comparison - Machining High Speed Tool Steel (68HRC)

Excellent wear resistance when machining high-hardness steel.

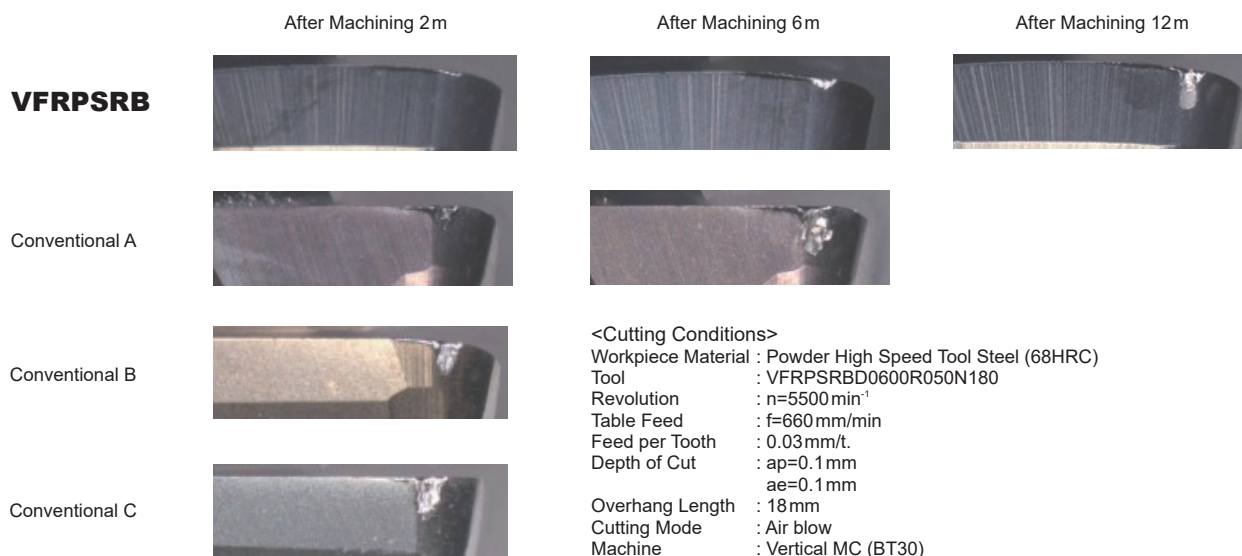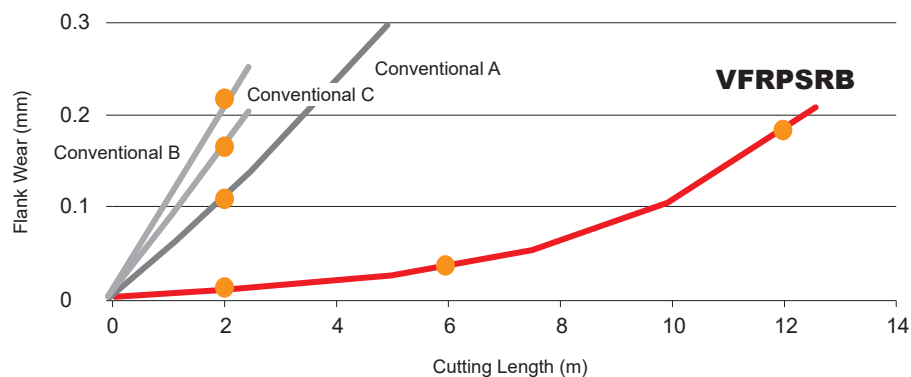


Ball Nose End Mill, Long Neck, 2-Flute

# VFR2XLB

Precise machining of vertical walls is possible due to a back taper and a strong, seamless ball nose cutting edge geometry.

## Ball Nose Optimisation

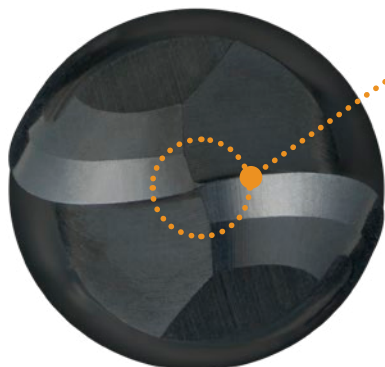

Ideal centre flute geometry for finish machining.

## Rake Angle Optimisation

Optimum geometry provides a sharp edge together with fracture resistance that enables excellent surface finishes.

## Strong Back Taper


Reduces chatter and vibration when machining vertical walls.



## Cutting Performance


### Wear Resistance Comparison - Machining ASP23 (62HRC)

Greatly improved wear resistance for high precision machining.

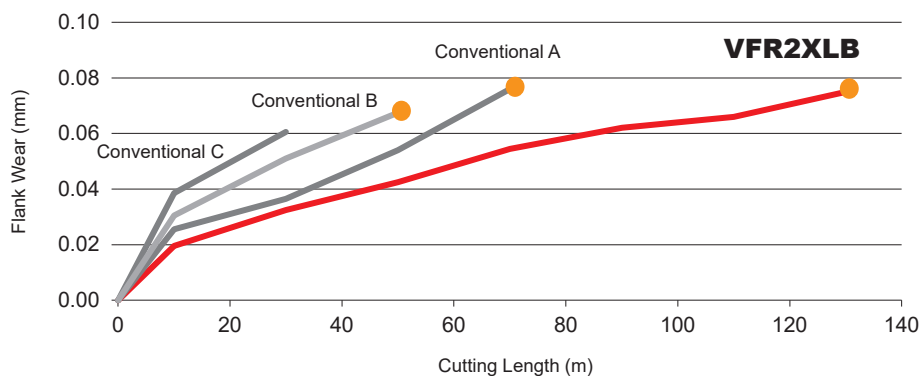

#### <Cutting Conditions>

Workpiece Material : ASP23 (62HRC)  
Tool : VFR2XLB R0100N120  
Revolution :  $n=16000 \text{ min}^{-1}$   
Table Feed :  $f=1600 \text{ mm/min}$   
Feed per Tooth :  $0.05 \text{ mm/t}$   
Depth of Cut :  $a_p=0.05 \text{ mm} \times 10$   
 $a_e=0.1 \text{ mm} \times 10$   
Overhang Length : 18 mm  
Cutting Mode : Air blow  
Machine : Vertical MC (HSK-E32)

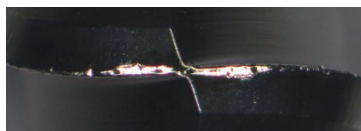

VFR2XLB



Conventional A




Conventional B

## Cutting Performance


### Cutting Edge Geometry for Finishing

Sharp but strong cutting edge enables good surface finishes.



**VFR2XLB**

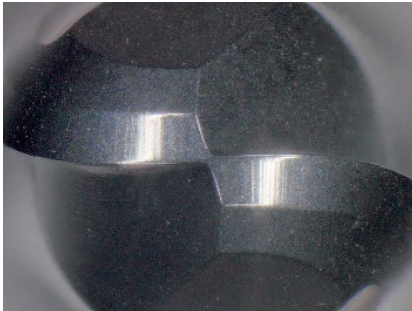



Conventional

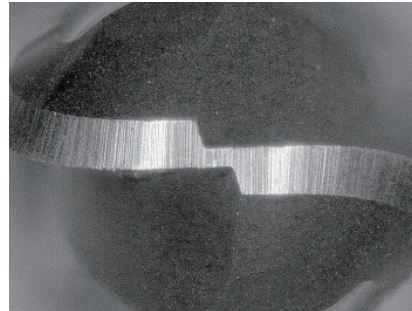

### Comparison of Surface Finishes

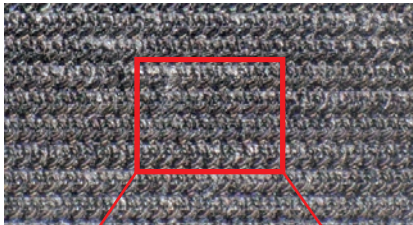


Sharp edges leave a uniform finish.

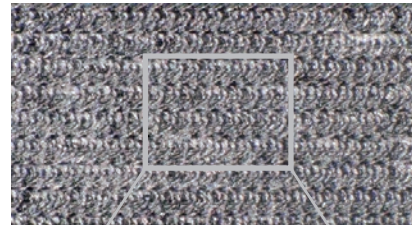


A dull edge leaves an undefined finish.

### Comparison of Surface Roughness (Feed Side)

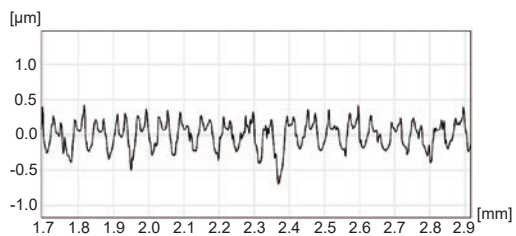

Ra=0.174µm, Rz=1.12µm

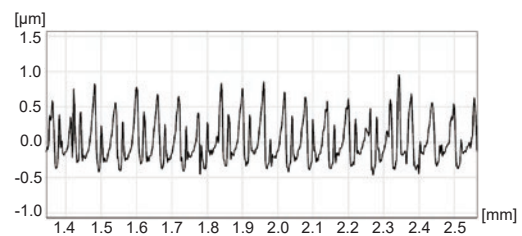




Ra=0.240µm, Rz=2.01µm

# Application Example

## Machining of a Bevel Gear Mould

Ideal for machining high-hardness precision, cold forging moulds of 65HRC or higher.

(mm)

| No. | Process                              | Tools Used                  | vc<br>(m/min) | n<br>(min <sup>-1</sup> ) | vf<br>(mm/min) | ap   | ae   | Next<br>Process<br>Finishing<br>Allowance | 3D Model<br>Post Machining                                                            |
|-----|--------------------------------------|-----------------------------|---------------|---------------------------|----------------|------|------|-------------------------------------------|---------------------------------------------------------------------------------------|
| 1   | Rough Machining<br>(Central Helical) | <b>VFR2SBR0400</b>          | 80            | 3,200                     | 130            | 3    | 0.6  | 0.1                                       |    |
| 2   | Rough Pocket<br>Milling①             | <b>VFR2SBR0200</b>          | 80            | 6,300                     | 250            | 0.9  | 0.3  | 0.2                                       |    |
| 3   | Rough Pocket<br>Milling②             | <b>VFR2XLBR0150N100</b>     | 60            | 6,300                     | 190            | 0.9  | 0.15 | 0.2                                       |   |
| 4   | Semi-finish<br>Machining             | <b>VFR2XLBR0100N100</b>     | 80            | 12,700                    | 250            | 0.2  | 0.1  | 0.1                                       |  |
| 5   | Deep Wall<br>Finish Machining        | <b>VFR2XLBR0100N100</b>     | 80            | 12,700                    | 250            | 0.1  | 0.03 | 0                                         |  |
| 6   | Bottom Face<br>Finish Machining      | <b>VFRPSRBD0300R050N100</b> | 40            | 4,500                     | 270            | 0.1  | 0.1  | 0                                         |  |
| 7   | Upper Surface<br>Milling             | <b>VFRPSRBD0600R050N180</b> | 40            | 2,100                     | 500            | 0.02 | 0.5  | 0                                         |  |
| 8   | Chamfering                           | <b>VC2CD0600</b>            | 50            | 2,700                     | 110            | 0.5  | 0.2  | 0                                         |  |

<Cutting Conditions>

Workpiece Material : SKH51

50×50×25

Machine

: Vertical MC (HSK-E32)



## Application Example

### Comparison of Surface Finishes - Machining of Dies Used for Plastic Moulding

Ideal surface finishes of dies can be achieved.

Workpiece Material : Steel die used for plastic moulding ( M340 58HRC )

(mm)

| Process               | Tools Used              | n<br>(min <sup>-1</sup> ) | vf<br>(mm/min) | ap   | ae   | Coolant |
|-----------------------|-------------------------|---------------------------|----------------|------|------|---------|
| Semi-finish Machining | <b>VFR2XLBR0050N040</b> | 18000                     | 900            | 0.02 | 0.02 | MQL     |
|                       | <b>VFR2XLBR0100N060</b> | 17500                     | 1200           | 0.03 | 0.1  |         |
| Finish Machining      | <b>VFR2XLBR0050N040</b> | 18000                     | 900            | 0.02 | 0.02 |         |
|                       | <b>VFR2XLBR0100N060</b> | 17500                     | 1200           | 0.03 | 0.08 |         |



**VFR2XLB** Has a smooth surface



Conventional

### Comparison of Surface Finishes - Machining SKD11


Excellent surface finish compared to those machined by conventional tools.



**VFR2XLB**



Conventional A cloudy surface finish

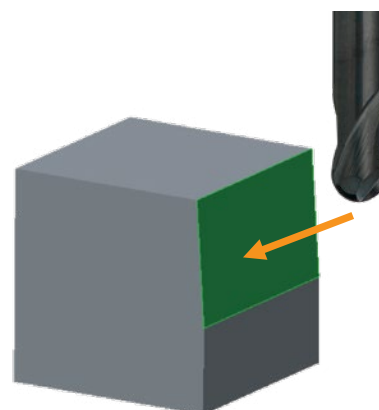


Cutting Form : 1° Taper Cutting

<Cutting Conditions>

Workpiece Material : JIS SKD11 (60HRC)  
 Tool : VFR2XLBR0100N100  
 Revolution : n=19000 min<sup>-1</sup>  
 Table Feed : f=680 mm/min  
 Depth of Cut : ap=0.02mm  
 ae=0.02mm  
 Overhang Length : 16 mm  
 Cutting Mode : Air blow  
 Machine : Vertical MC (HSK-E32)


# Cutting Performance

## JIS SKD61 (52HRC)

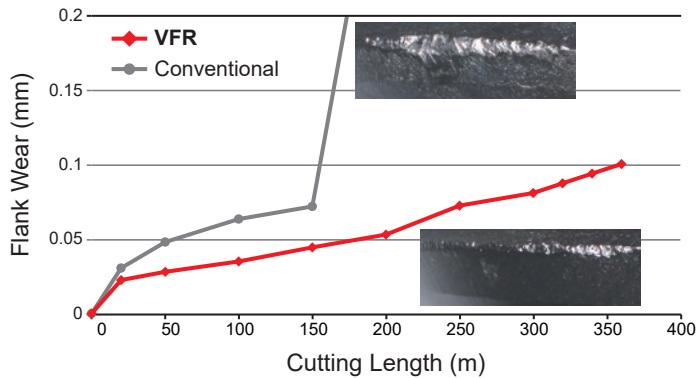


### <Cutting Conditions>

Workpiece Material : JIS SKD61 (52HRC)  
 Tool : VFR2SBR0300  
 Revolution :  $n=17000 \text{ min}^{-1}$   
 Table Feed :  $v_f=1700 \text{ mm/min}$   
 Feed per Tooth :  $f_z=0.05 \text{ mm/t}$   
 Depth of Cut :  $a_p=2 \text{ mm}$ ,  $a_e=0.3 \text{ mm}$   
 Overhang Length : 22 mm  
 Cutting Mode : Air blow  
 Machine : Vertical MC (HSK-A63)

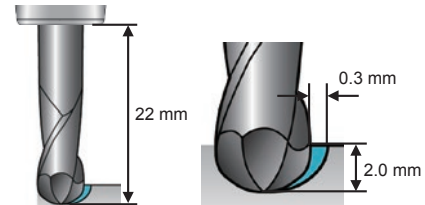


## JIS SKD11 (60HRC)

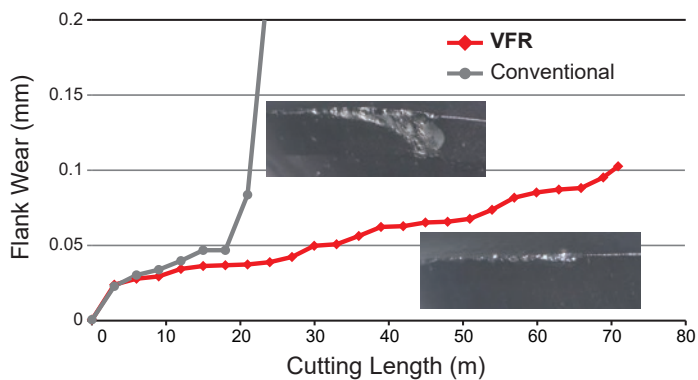


### <Cutting Conditions>

Workpiece Material : JIS SKD11 (60HRC)  
 Tool : VFR2SBR0300  
 Revolution :  $n=5400 \text{ min}^{-1}$   
 Table Feed :  $v_f=540 \text{ mm/min}$   
 Feed per Tooth :  $f_z=0.05 \text{ mm/t}$   
 Depth of Cut :  $a_p=2 \text{ mm}$ ,  $a_e=0.2 \text{ mm}$   
 Overhang Length : 22 mm  
 Cutting Mode : Air Blow  
 Machine : Vertical MC (HSK-A63)

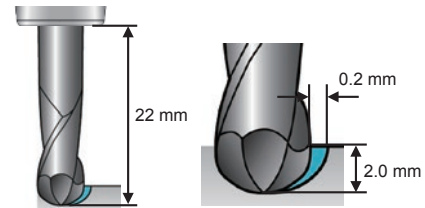


## ASP23 (62HRC)

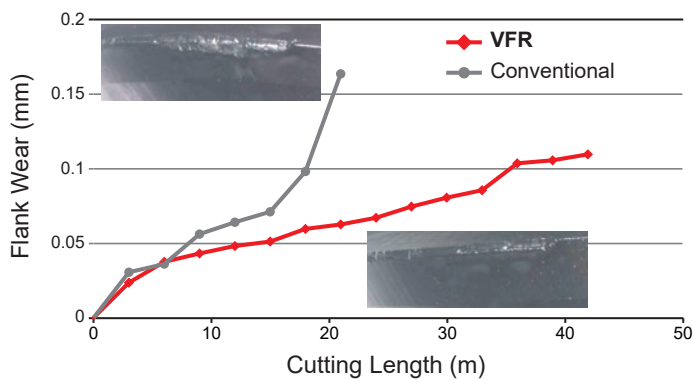


### <Cutting Conditions>

Workpiece Material : ASP23 (62HRC)  
 Tool : VFR2SBR0300  
 Revolution :  $n=5400 \text{ min}^{-1}$   
 Table Feed :  $v_f=540 \text{ mm/min}$   
 Feed per Tooth :  $f_z=0.05 \text{ mm/t}$   
 Depth of Cut :  $a_p=2 \text{ mm}$ ,  $a_e=0.2 \text{ mm}$   
 Overhang Length : 22 mm  
 Cutting Mode : Air Blow  
 Machine : Vertical MC (HSK-A63)

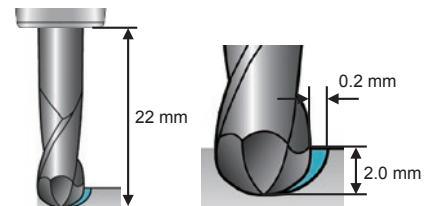


## JIS SKH51 (64HRC)

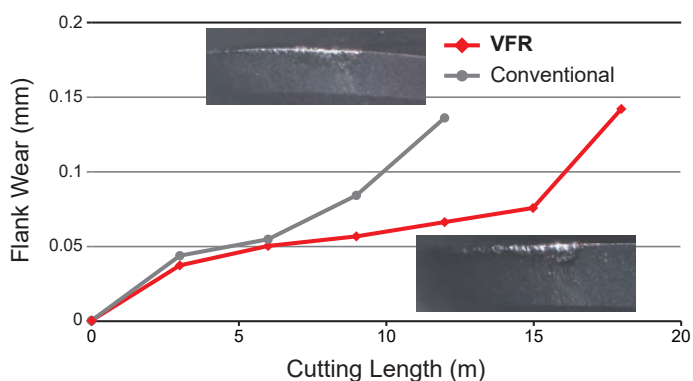


### <Cutting Conditions>

Workpiece Material : JIS SKH51 (64HRC)  
 Tool : VFR2SBR0300  
 Revolution :  $n=5400 \text{ min}^{-1}$   
 Table Feed :  $v_f=540 \text{ mm/min}$   
 Feed per Tooth :  $f_z=0.05 \text{ mm/t}$   
 Depth of Cut :  $a_p=2 \text{ mm}$ ,  $a_e=0.2 \text{ mm}$   
 Overhang Length : 22 mm  
 Cutting Mode : Air Blow  
 Machine : Vertical MC (HSK-A63)

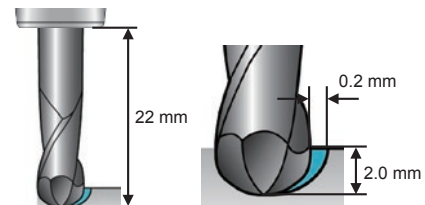


# Cutting Performance

## STAVAX (52 HRC) Comparison of Machined Surface

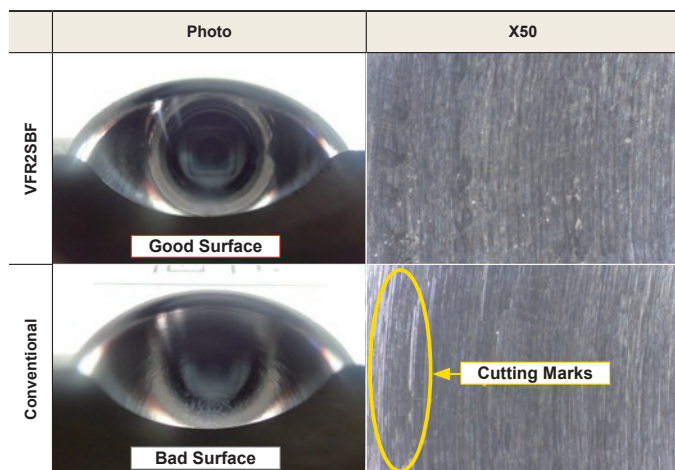

### Model Shape

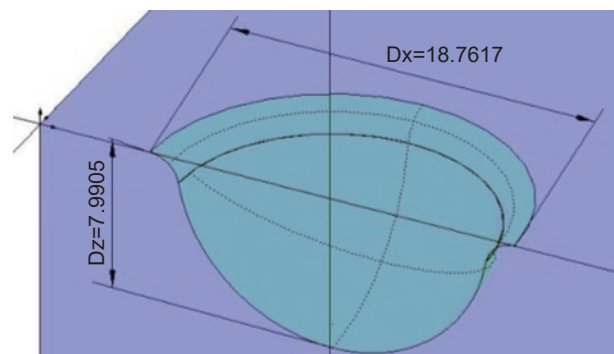

#### <Cutting Conditions>

Workpiece Material : STAVAX (52HRC)  
 Tool : VFR2SBFR0300  
 Revolution :  $n=32000 \text{ min}^{-1}$   
 Cutting Speed :  $vc=603 \text{ m/min}$   
 Table Feed :  $vf=1280 \text{ mm/min}$

Feed per Tooth :  $fz=0.02 \text{ mm/t.}$   
 Depth of Cut :  $ap=0.02 \text{ mm, } ae=0.02 \text{ mm}$   
 Overhang Length : 15 mm  
 Cutting Mode : Air Blow  
 Machine : Vertical MC (HSK-E25)

#### For Your Safety

●Don't handle inserts and chips without gloves. ●Please machine within the recommended application range and exchange expired tools with new ones in advance of breakage. ●Please use safety covers and wear safety glasses. ●When using compounded cutting oils, please take fire precautions. ●When attaching inserts or spare parts, please use only the correct wrench or driver. ●When using rotating tools, please make a trial run to check run-out, vibration and abnormal sounds etc.

## MITSUBISHI MATERIALS CORPORATION

### MMC HARDMETAL INDIA PVT LTD

#### Head Office

Prasad Enclave, #118/119, 1st Floor, 2nd Stage BBMP Ward #11,  
 (New #38), Industrial Suburb, Yeshwanthpura, Bengaluru-560 022  
 Karnataka, India, Tel : +91 80 2204 3600  
 E-mail : mb-mmci@mmc.co.jp

#### REGIONAL OFFICES:

##### Pune Office

Plot No, A-27 & A-28, H-Block,  
 Pimpri Waghere, Pimpri Industrial Area MIDC,  
 Pune – 411018, Maharashtra, India  
 Tel :: +91 020-27456959

##### Gurugram Office

#407, 4th Floor, JMD Galleria, Sohna Road,  
 Opposite Malibu Town, Sector-48,  
 Gurgaon-122 001 Haryana, India.  
 Tel : +91 124 4089163

##### Chennai Office

MM Complex, 2nd Floor, Part 30/10 Hopman 2nd Street,  
 100 Feet Main Road, Alandur,  
 Chennai – 600 016 Tamilnadu, India.  
 Tel: +91 44 4550 7006

##### Ahmedabad Office

210, Sigma Arcade, 2nd Floor, Visat Circle,  
 Ahmedabad-Mehsana Road, Chandkheda,  
 Ahmedabad – 382 424, Gujarat, India.  
 Tel : +91 79 2329 9300

<http://www.mmc-carbide.com/>

(Tools specifications subject to change without notice.)