


CBN Grade for Sintered Alloys and Cast Irons

**MB4120**New  
Product

# Excellent Fracture Resistance and Stable Cutting Improves Productivity

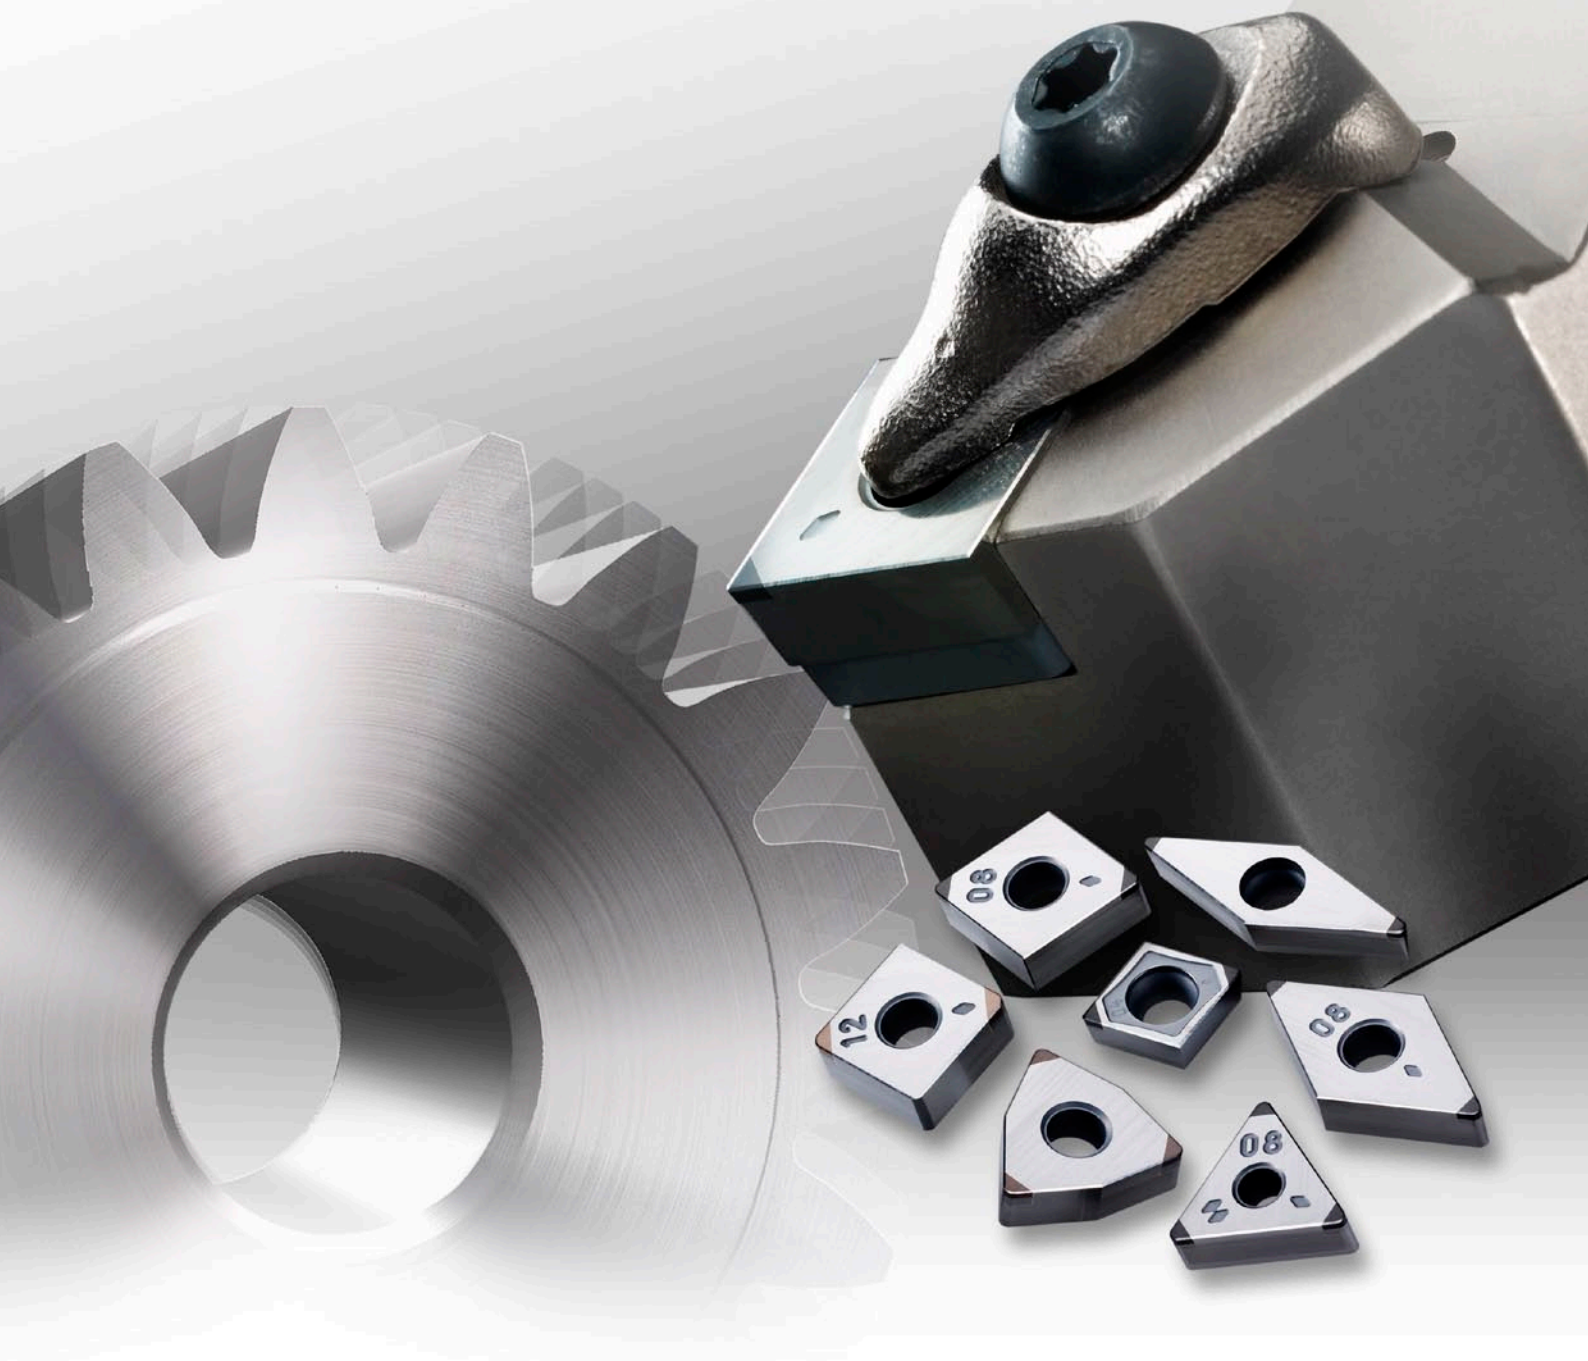

# CBN Grade for Sintered Alloys and Cast Irons

## ***MB4120***


Increasing the CBN particle content and bonding strength makes it suitable for machining various sintered materials.

### High Fracture Resistance

Fine CBN particles increase cutting edge toughness. The high fracture resistance allows stable performance even during interrupted machining.


### High Adhesion Strength of Fine CBN Particles

Optimization of the sintering conditions strengthens adhesion between fine CBN particles. This increases both fracture resistance and wear resistance.

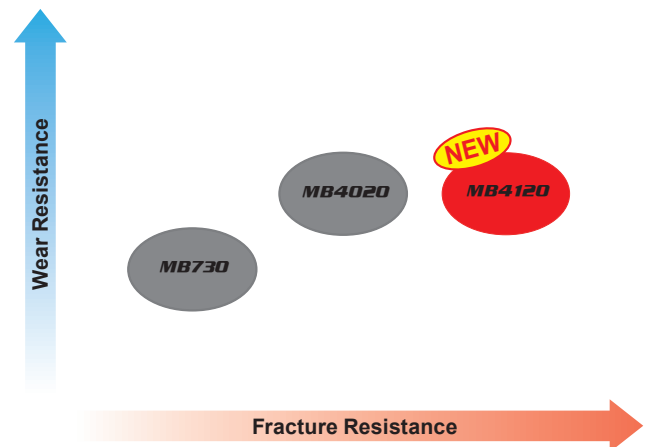

## A Wide Range of Edge Preparation (Honing) are Available


The SF type offers a sharper cutting edge, leading to the reduction in cutting resistance and burr development and an increase in surface finishes. The SF type is the first recommendation but, to increase cutting edge strength and chipping resistance there are also the SE, FS, GS and TS edge preparations.

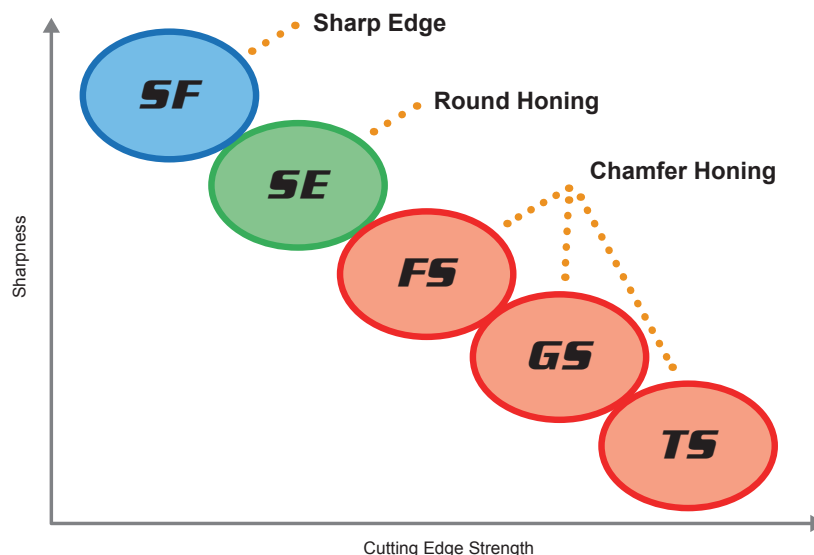

# Cutting Performance

## Fracture Resistance Comparison During Interrupted Facing of High Strength Sintered Alloy

Increased fracture resistance even during heavy interrupted machining.

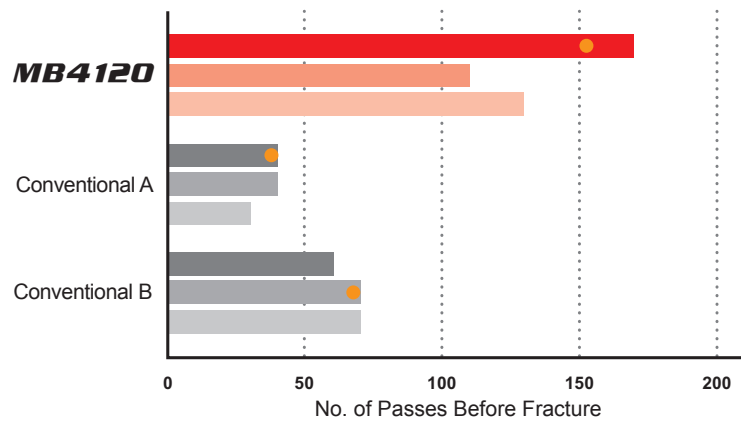

<Cutting Conditions>

Work Material : High Strength Sintered Alloy




Insert : NP-TNGA160408SE3

Cutting Speed :  $v_c = 150 \text{ m/min}$

Feed per Rev. :  $f = 0.15 \text{ mm/rev}$


Depth of Cut :  $a_p = 0.1 \text{ mm}$

Cutting Mode : Wet Cutting

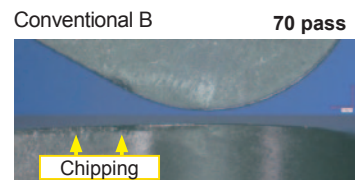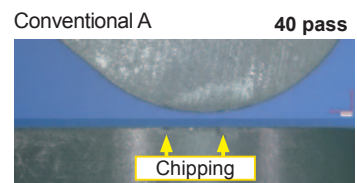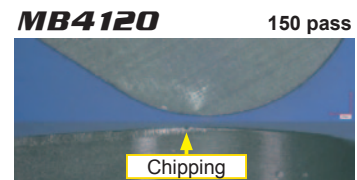

## Comparison in Continuous Machining of AISI No 35 B

Excellent fracture resistance compared to conventional products.

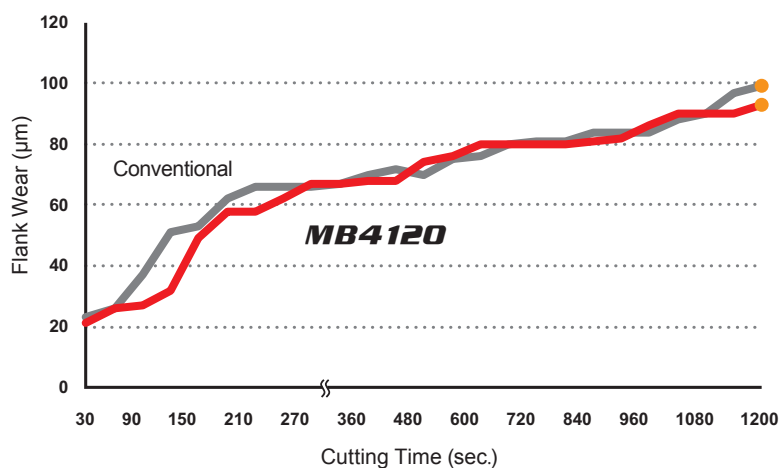

<Cutting Conditions>

Work Material : AISI No 35 B (Pearlite)



Insert : NP-TNGA160408SF3

Cutting Speed :  $v_c = 800 \text{ m/min}$

Feed per Rev. :  $f = 0.1 \text{ mm/rev}$

Depth of Cut :  $a_p = 0.2 \text{ mm}$


Cutting Mode : Dry Cutting

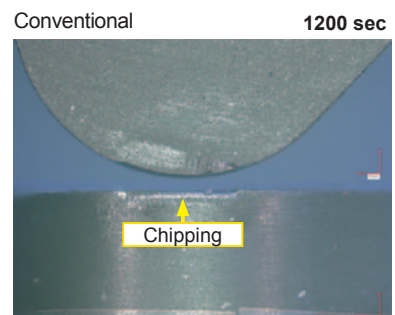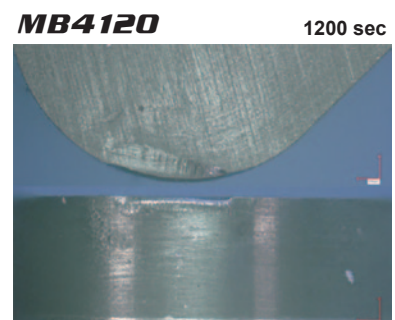

# CBN Grade for Sintered Alloys and Cast Irons

## Negative Inserts (With Hole)

### G Class

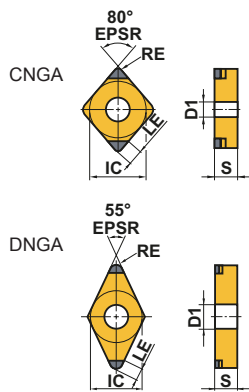

| NEW PETIT CUT |  |  |  |
|---------------|--|--|--|
| NP_002        |  |  |  |
| NEW PETIT CUT |  |  |  |
| NP_002        |  |  |  |


(mm)

| Order Number     | MB4120 | Cutting Edges | IC   | S    | RE  | D1   | LE  |
|------------------|--------|---------------|------|------|-----|------|-----|
| NP-CNGA120404SF2 | ●      | 2             | 12.7 | 4.76 | 0.4 | 5.16 | 1.9 |
| NP-CNGA120408SF2 | ●      | 2             | 12.7 | 4.76 | 0.8 | 5.16 | 2.1 |
| NP-CNGA120412SF2 | ●      | 2             | 12.7 | 4.76 | 1.2 | 5.16 | 2.3 |
| NP-CNGA120404SE2 | ●      | 2             | 12.7 | 4.76 | 0.4 | 5.16 | 1.9 |
| NP-CNGA120408SE2 | ●      | 2             | 12.7 | 4.76 | 0.8 | 5.16 | 2.1 |
| NP-CNGA120412SE2 | ●      | 2             | 12.7 | 4.76 | 1.2 | 5.16 | 2.3 |
| NP-CNGA120404FS2 | ●      | 2             | 12.7 | 4.76 | 0.4 | 5.16 | 1.9 |
| NP-CNGA120408FS2 | ●      | 2             | 12.7 | 4.76 | 0.8 | 5.16 | 2.1 |
| NP-CNGA120412FS2 | ●      | 2             | 12.7 | 4.76 | 1.2 | 5.16 | 2.3 |
| NP-CNGA120404GS2 | ●      | 2             | 12.7 | 4.76 | 0.4 | 5.16 | 1.9 |
| NP-CNGA120408GS2 | ●      | 2             | 12.7 | 4.76 | 0.8 | 5.16 | 2.1 |
| NP-CNGA120412GS2 | ●      | 2             | 12.7 | 4.76 | 1.2 | 5.16 | 2.3 |
| NP-CNGA120404TS2 | ●      | 2             | 12.7 | 4.76 | 0.4 | 5.16 | 1.9 |
| NP-CNGA120408TS2 | ●      | 2             | 12.7 | 4.76 | 0.8 | 5.16 | 2.1 |
| NP-CNGA120412TS2 | ●      | 2             | 12.7 | 4.76 | 1.2 | 5.16 | 2.3 |
| NP-DNGA150404SF2 | ●      | 2             | 12.7 | 4.76 | 0.4 | 5.16 | 2.1 |
| NP-DNGA150408SF2 | ●      | 2             | 12.7 | 4.76 | 0.8 | 5.16 | 2.0 |
| NP-DNGA150412SF2 | ●      | 2             | 12.7 | 4.76 | 1.2 | 5.16 | 1.9 |
| NP-DNGA150604SF2 | ●      | 2             | 12.7 | 6.35 | 0.4 | 5.16 | 2.1 |
| NP-DNGA150608SF2 | ●      | 2             | 12.7 | 6.35 | 0.8 | 5.16 | 2.0 |
| NP-DNGA150612SF2 | ●      | 2             | 12.7 | 6.35 | 1.2 | 5.16 | 1.9 |
| NP-DNGA150404SE2 | ●      | 2             | 12.7 | 4.76 | 0.4 | 5.16 | 2.1 |
| NP-DNGA150408SE2 | ●      | 2             | 12.7 | 4.76 | 0.8 | 5.16 | 2.0 |
| NP-DNGA150412SE2 | ●      | 2             | 12.7 | 4.76 | 1.2 | 5.16 | 1.9 |
| NP-DNGA150604SE2 | ●      | 2             | 12.7 | 6.35 | 0.4 | 5.16 | 2.1 |
| NP-DNGA150608SE2 | ●      | 2             | 12.7 | 6.35 | 0.8 | 5.16 | 2.0 |
| NP-DNGA150612SE2 | ●      | 2             | 12.7 | 6.35 | 1.2 | 5.16 | 1.9 |
| NP-DNGA150404FS2 | ●      | 2             | 12.7 | 4.76 | 0.4 | 5.16 | 2.1 |
| NP-DNGA150408FS2 | ●      | 2             | 12.7 | 4.76 | 0.8 | 5.16 | 2.0 |
| NP-DNGA150412FS2 | ●      | 2             | 12.7 | 4.76 | 1.2 | 5.16 | 1.9 |
| NP-DNGA150604FS2 | ●      | 2             | 12.7 | 6.35 | 0.4 | 5.16 | 2.1 |
| NP-DNGA150608FS2 | ●      | 2             | 12.7 | 6.35 | 0.8 | 5.16 | 2.0 |
| NP-DNGA150612FS2 | ●      | 2             | 12.7 | 6.35 | 1.2 | 5.16 | 1.9 |
| NP-DNGA150404GS2 | ●      | 2             | 12.7 | 4.76 | 0.4 | 5.16 | 2.1 |
| NP-DNGA150408GS2 | ●      | 2             | 12.7 | 4.76 | 0.8 | 5.16 | 2.0 |
| NP-DNGA150412GS2 | ●      | 2             | 12.7 | 4.76 | 1.2 | 5.16 | 1.9 |
| NP-DNGA150604GS2 | ●      | 2             | 12.7 | 6.35 | 0.4 | 5.16 | 2.1 |
| NP-DNGA150608GS2 | ●      | 2             | 12.7 | 6.35 | 0.8 | 5.16 | 2.0 |
| NP-DNGA150612GS2 | ●      | 2             | 12.7 | 6.35 | 1.2 | 5.16 | 1.9 |
| NP-DNGA150404TS2 | ●      | 2             | 12.7 | 4.76 | 0.4 | 5.16 | 2.1 |
| NP-DNGA150408TS2 | ●      | 2             | 12.7 | 4.76 | 0.8 | 5.16 | 2.0 |
| NP-DNGA150412TS2 | ●      | 2             | 12.7 | 4.76 | 1.2 | 5.16 | 1.9 |
| NP-DNGA150604TS2 | ●      | 2             | 12.7 | 6.35 | 0.4 | 5.16 | 2.1 |
| NP-DNGA150608TS2 | ●      | 2             | 12.7 | 6.35 | 0.8 | 5.16 | 2.0 |
| NP-DNGA150612TS2 | ●      | 2             | 12.7 | 6.35 | 1.2 | 5.16 | 1.9 |

● : Inventory maintained in Japan. (1 insert in one case.)

# Negative Inserts (With Hole)

## G Class

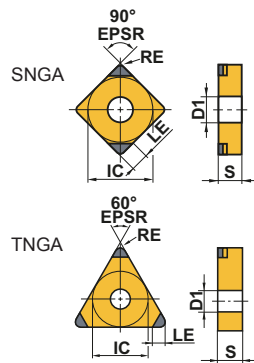

| NEW PETIT CUT |  |  |  |
|---------------|--|--|--|
| NP_002        |  |  |  |
| NEW PETIT CUT |  |  |  |
| NP_003        |  |  |  |


(mm)


| Order Number     | MB4120 | Cutting Edges | IC    | S    | RE  | D1   | LE  |
|------------------|--------|---------------|-------|------|-----|------|-----|
| NP-SNGA120404SF2 | ●      | 2             | 12.7  | 4.76 | 0.4 | 5.16 | 2.1 |
| NP-SNGA120408SF2 | ●      | 2             | 12.7  | 4.76 | 0.8 | 5.16 | 2.3 |
| NP-SNGA120412SF2 | ●      | 2             | 12.7  | 4.76 | 1.2 | 5.16 | 2.5 |
| NP-SNGA120404SE2 | ●      | 2             | 12.7  | 4.76 | 0.4 | 5.16 | 2.1 |
| NP-SNGA120408SE2 | ●      | 2             | 12.7  | 4.76 | 0.8 | 5.16 | 2.3 |
| NP-SNGA120412SE2 | ●      | 2             | 12.7  | 4.76 | 1.2 | 5.16 | 2.5 |
| NP-SNGA120404FS2 | ●      | 2             | 12.7  | 4.76 | 0.4 | 5.16 | 2.1 |
| NP-SNGA120408FS2 | ●      | 2             | 12.7  | 4.76 | 0.8 | 5.16 | 2.3 |
| NP-SNGA120412FS2 | ●      | 2             | 12.7  | 4.76 | 1.2 | 5.16 | 2.5 |
| NP-SNGA120404GS2 | ●      | 2             | 12.7  | 4.76 | 0.4 | 5.16 | 2.1 |
| NP-SNGA120408GS2 | ●      | 2             | 12.7  | 4.76 | 0.8 | 5.16 | 2.3 |
| NP-SNGA120412GS2 | ●      | 2             | 12.7  | 4.76 | 1.2 | 5.16 | 2.5 |
| NP-SNGA120404TS2 | ●      | 2             | 12.7  | 4.76 | 0.4 | 5.16 | 2.1 |
| NP-SNGA120408TS2 | ●      | 2             | 12.7  | 4.76 | 0.8 | 5.16 | 2.3 |
| NP-SNGA120412TS2 | ●      | 2             | 12.7  | 4.76 | 1.2 | 5.16 | 2.5 |
| NP-TNGA160404SF3 | ●      | 3             | 9.525 | 4.76 | 0.4 | 3.81 | 1.6 |
| NP-TNGA160408SF3 | ●      | 3             | 9.525 | 4.76 | 0.8 | 3.81 | 1.8 |
| NP-TNGA160412SF3 | ●      | 3             | 9.525 | 4.76 | 1.2 | 3.81 | 1.9 |
| NP-TNGA160404SE3 | ●      | 3             | 9.525 | 4.76 | 0.4 | 3.81 | 1.6 |
| NP-TNGA160408SE3 | ●      | 3             | 9.525 | 4.76 | 0.8 | 3.81 | 1.8 |
| NP-TNGA160412SE3 | ●      | 3             | 9.525 | 4.76 | 1.2 | 3.81 | 1.9 |
| NP-TNGA160404FS3 | ●      | 3             | 9.525 | 4.76 | 0.4 | 3.81 | 1.6 |
| NP-TNGA160408FS3 | ●      | 3             | 9.525 | 4.76 | 0.8 | 3.81 | 1.8 |
| NP-TNGA160412FS3 | ●      | 3             | 9.525 | 4.76 | 1.2 | 3.81 | 1.9 |
| NP-TNGA160404GS3 | ●      | 3             | 9.525 | 4.76 | 0.4 | 3.81 | 1.6 |
| NP-TNGA160408GS3 | ●      | 3             | 9.525 | 4.76 | 0.8 | 3.81 | 1.8 |
| NP-TNGA160412GS3 | ●      | 3             | 9.525 | 4.76 | 1.2 | 3.81 | 1.9 |
| NP-TNGA160404TS3 | ●      | 3             | 9.525 | 4.76 | 0.4 | 3.81 | 1.6 |
| NP-TNGA160408TS3 | ●      | 3             | 9.525 | 4.76 | 0.8 | 3.81 | 1.8 |
| NP-TNGA160412TS3 | ●      | 3             | 9.525 | 4.76 | 1.2 | 3.81 | 1.9 |

# CBN Grade for Sintered Alloys and Cast Irons

## Positive Inserts (With Hole)

### G Class

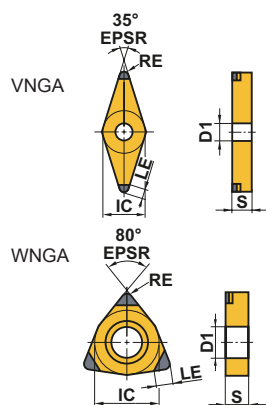

| NEW PETIT CUT                                                                      |  |  |  |
|------------------------------------------------------------------------------------|--|--|--|
| NP_002                                                                             |  |  |  |
|  |  |  |  |
| NEW PETIT CUT                                                                      |  |  |  |
| NP_003                                                                             |  |  |  |
|  |  |  |  |

(mm)

| Order Number     | MB4120 | Cutting Edges | IC    | S    | RE  | D1   | LE  |
|------------------|--------|---------------|-------|------|-----|------|-----|
| NP-VNGA160404SF2 | ●      | 2             | 9.525 | 4.76 | 0.4 | 3.81 | 2.5 |
| NP-VNGA160408SF2 | ●      | 2             | 9.525 | 4.76 | 0.8 | 3.81 | 2.0 |
| NP-VNGA160404SE2 | ●      | 2             | 9.525 | 4.76 | 0.4 | 3.81 | 2.5 |
| NP-VNGA160408SE2 | ●      | 2             | 9.525 | 4.76 | 0.8 | 3.81 | 2.0 |
| NP-VNGA160404FS2 | ●      | 2             | 9.525 | 4.76 | 0.4 | 3.81 | 2.5 |
| NP-VNGA160408FS2 | ●      | 2             | 9.525 | 4.76 | 0.8 | 3.81 | 2.0 |
| NP-VNGA160404GS2 | ●      | 2             | 9.525 | 4.76 | 0.4 | 3.81 | 2.5 |
| NP-VNGA160408GS2 | ●      | 2             | 9.525 | 4.76 | 0.8 | 3.81 | 2.0 |
| NP-VNGA160404TS2 | ●      | 2             | 9.525 | 4.76 | 0.4 | 3.81 | 2.5 |
| NP-VNGA160408TS2 | ●      | 2             | 9.525 | 4.76 | 0.8 | 3.81 | 2.0 |
| NP-WNGA080408SF3 | ●      | 3             | 12.7  | 4.76 | 0.8 | 5.16 | 2.1 |
| NP-WNGA080408SE3 | ●      | 3             | 12.7  | 4.76 | 0.8 | 5.16 | 2.1 |
| NP-WNGA080408FS3 | ●      | 3             | 12.7  | 4.76 | 0.8 | 5.16 | 2.1 |
| NP-WNGA080408GS3 | ●      | 3             | 12.7  | 4.76 | 0.8 | 5.16 | 2.1 |
| NP-WNGA080408TS3 | ●      | 3             | 12.7  | 4.76 | 0.8 | 5.16 | 2.1 |


● : Inventory maintained in Japan. (1 insert in one case.)



# Positive Inserts (With Hole)

## G Class

VBGW



| NEW PETIT CUT |  |  |  |
|---------------|--|--|--|
| NP_002        |  |  |  |
|               |  |  |  |
|               |  |  |  |
|               |  |  |  |


(mm)

| Order Number     | MB4120 | Cutting Edges | IC    | S    | RE  | D1   | LE  |
|------------------|--------|---------------|-------|------|-----|------|-----|
| NP-VBGW110304SF2 | ●      | 2             | 6.35  | 3.18 | 0.4 | 2.85 | 2.5 |
| NP-VBGW110308SF2 | ●      | 2             | 6.35  | 3.18 | 0.8 | 2.85 | 2.0 |
| NP-VBGW160404SF2 | ●      | 2             | 9.525 | 4.76 | 0.4 | 4.43 | 2.5 |
| NP-VBGW160408SF2 | ●      | 2             | 9.525 | 4.76 | 0.8 | 4.43 | 2.0 |
| NP-VBGW110304SE2 | ●      | 2             | 6.35  | 3.18 | 0.4 | 2.85 | 2.5 |
| NP-VBGW110308SE2 | ●      | 2             | 6.35  | 3.18 | 0.8 | 2.85 | 2.0 |
| NP-VBGW160404SE2 | ●      | 2             | 9.525 | 4.76 | 0.4 | 4.43 | 2.5 |
| NP-VBGW160408SE2 | ●      | 2             | 9.525 | 4.76 | 0.8 | 4.43 | 2.0 |
| NP-VBGW110304FS2 | ●      | 2             | 6.35  | 3.18 | 0.4 | 2.85 | 2.5 |
| NP-VBGW110308FS2 | ●      | 2             | 6.35  | 3.18 | 0.8 | 2.85 | 2.0 |
| NP-VBGW160404FS2 | ●      | 2             | 9.525 | 4.76 | 0.4 | 4.43 | 2.5 |
| NP-VBGW160408FS2 | ●      | 2             | 9.525 | 4.76 | 0.8 | 4.43 | 2.0 |
| NP-VBGW110304GS2 | ●      | 2             | 6.35  | 3.18 | 0.4 | 2.85 | 2.5 |
| NP-VBGW110308GS2 | ●      | 2             | 6.35  | 3.18 | 0.8 | 2.85 | 2.0 |
| NP-VBGW160404GS2 | ●      | 2             | 9.525 | 4.76 | 0.4 | 4.43 | 2.5 |
| NP-VBGW160408GS2 | ●      | 2             | 9.525 | 4.76 | 0.8 | 4.43 | 2.0 |

# CBN Grade for Sintered Alloys and Cast Irons

## Positive Inserts (With Hole)

### G Class



| NEW PETIT CUT |  |  |  |
|---------------|--|--|--|
| NP_002        |  |  |  |
|               |  |  |  |
|               |  |  |  |

(mm)


| Order Number     | MB4120 | Cutting Edges | IC    | S    | RE  | D1  | LE  |
|------------------|--------|---------------|-------|------|-----|-----|-----|
| NP-CCGW060202SF2 | ●      | 2             | 6.35  | 2.38 | 0.2 | 2.8 | 1.8 |
| NP-CCGW060204SF2 | ●      | 2             | 6.35  | 2.38 | 0.4 | 2.8 | 1.9 |
| NP-CCGW060208SF2 | ●      | 2             | 6.35  | 2.38 | 0.8 | 2.8 | 2.1 |
| NP-CCGW09T302SF2 | ●      | 2             | 9.525 | 3.97 | 0.2 | 4.4 | 1.8 |
| NP-CCGW09T304SF2 | ●      | 2             | 9.525 | 3.97 | 0.4 | 4.4 | 1.9 |
| NP-CCGW09T308SF2 | ●      | 2             | 9.525 | 3.97 | 0.8 | 4.4 | 2.1 |
| NP-CCGW060202SE2 | ●      | 2             | 6.35  | 2.38 | 0.2 | 2.8 | 1.8 |
| NP-CCGW060204SE2 | ●      | 2             | 6.35  | 2.38 | 0.4 | 2.8 | 1.9 |
| NP-CCGW060208SE2 | ●      | 2             | 6.35  | 2.38 | 0.8 | 2.8 | 2.1 |
| NP-CCGW09T302SE2 | ●      | 2             | 9.525 | 3.97 | 0.2 | 4.4 | 1.8 |
| NP-CCGW09T304SE2 | ●      | 2             | 9.525 | 3.97 | 0.4 | 4.4 | 1.9 |
| NP-CCGW09T308SE2 | ●      | 2             | 9.525 | 3.97 | 0.8 | 4.4 | 2.1 |
| NP-CCGW060202FS2 | ●      | 2             | 6.35  | 2.38 | 0.2 | 2.8 | 1.8 |
| NP-CCGW060204FS2 | ●      | 2             | 6.35  | 2.38 | 0.4 | 2.8 | 1.9 |
| NP-CCGW060208FS2 | ●      | 2             | 6.35  | 2.38 | 0.8 | 2.8 | 2.1 |
| NP-CCGW09T302FS2 | ●      | 2             | 9.525 | 3.97 | 0.2 | 4.4 | 1.8 |
| NP-CCGW09T304FS2 | ●      | 2             | 9.525 | 3.97 | 0.4 | 4.4 | 1.9 |
| NP-CCGW09T308FS2 | ●      | 2             | 9.525 | 3.97 | 0.8 | 4.4 | 2.1 |
| NP-CCGW060202GS2 | ●      | 2             | 6.35  | 2.38 | 0.2 | 2.8 | 1.8 |
| NP-CCGW060204GS2 | ●      | 2             | 6.35  | 2.38 | 0.4 | 2.8 | 1.9 |
| NP-CCGW060208GS2 | ●      | 2             | 6.35  | 2.38 | 0.8 | 2.8 | 2.1 |
| NP-CCGW09T302GS2 | ●      | 2             | 9.525 | 3.97 | 0.2 | 4.4 | 1.8 |
| NP-CCGW09T304GS2 | ●      | 2             | 9.525 | 3.97 | 0.4 | 4.4 | 1.9 |
| NP-CCGW09T308GS2 | ●      | 2             | 9.525 | 3.97 | 0.8 | 4.4 | 2.1 |
| NP-CCGW060208TS2 | ●      | 2             | 6.35  | 2.38 | 0.8 | 2.8 | 2.1 |
| NP-CCGW09T308TS2 | ●      | 2             | 9.525 | 3.97 | 0.8 | 4.4 | 2.1 |

● : Inventory maintained in Japan. (1 insert in one case.)



# Positive Inserts (With Hole)

## G Class

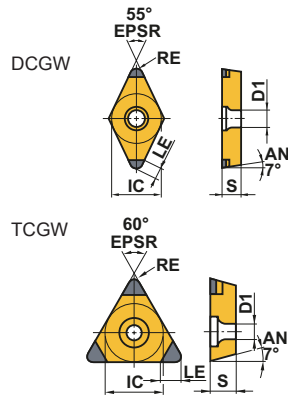

| NEW PETIT CUT |  |  |  |
|---------------|--|--|--|
| NP_002        |  |  |  |
| NEW PETIT CUT |  |  |  |
| NP_003        |  |  |  |


(mm)

| Order Number     | MB4120 | Cutting Edges | IC    | S    | RE  | D1  | LE  |
|------------------|--------|---------------|-------|------|-----|-----|-----|
| NP-DCGW070204SF2 | ●      | 2             | 6.35  | 2.38 | 0.4 | 2.8 | 2.1 |
| NP-DCGW070208SF2 | ●      | 2             | 6.35  | 2.38 | 0.8 | 2.8 | 2.0 |
| NP-DCGW11T302SF2 | ●      | 2             | 9.525 | 3.97 | 0.2 | 4.4 | 1.5 |
| NP-DCGW11T304SF2 | ●      | 2             | 9.525 | 3.97 | 0.4 | 4.4 | 2.1 |
| NP-DCGW11T308SF2 | ●      | 2             | 9.525 | 3.97 | 0.8 | 4.4 | 2.0 |
| NP-DCGW070204SE2 | ●      | 2             | 6.35  | 2.38 | 0.4 | 2.8 | 2.1 |
| NP-DCGW070208SE2 | ●      | 2             | 6.35  | 2.38 | 0.8 | 2.8 | 2.0 |
| NP-DCGW11T302SE2 | ●      | 2             | 9.525 | 3.97 | 0.2 | 4.4 | 1.5 |
| NP-DCGW11T304SE2 | ●      | 2             | 9.525 | 3.97 | 0.4 | 4.4 | 2.1 |
| NP-DCGW11T308SE2 | ●      | 2             | 9.525 | 3.97 | 0.8 | 4.4 | 2.0 |
| NP-DCGW070204FS2 | ●      | 2             | 6.35  | 2.38 | 0.4 | 2.8 | 2.1 |
| NP-DCGW070208FS2 | ●      | 2             | 6.35  | 2.38 | 0.8 | 2.8 | 2.0 |
| NP-DCGW11T302FS2 | ●      | 2             | 9.525 | 3.97 | 0.2 | 4.4 | 1.5 |
| NP-DCGW11T304FS2 | ●      | 2             | 9.525 | 3.97 | 0.4 | 4.4 | 2.1 |
| NP-DCGW11T308FS2 | ●      | 2             | 9.525 | 3.97 | 0.8 | 4.4 | 2.0 |
| NP-DCGW070204GS2 | ●      | 2             | 6.35  | 2.38 | 0.4 | 2.8 | 2.1 |
| NP-DCGW070208GS2 | ●      | 2             | 6.35  | 2.38 | 0.8 | 2.8 | 2.0 |
| NP-DCGW11T302GS2 | ●      | 2             | 9.525 | 3.97 | 0.2 | 4.4 | 1.5 |
| NP-DCGW11T304GS2 | ●      | 2             | 9.525 | 3.97 | 0.4 | 4.4 | 2.1 |
| NP-DCGW11T308GS2 | ●      | 2             | 9.525 | 3.97 | 0.8 | 4.4 | 2.0 |
| NP-TCGW110204SF3 | ●      | 3             | 6.35  | 2.38 | 0.4 | 2.8 | 1.6 |
| NP-TCGW110208SF3 | ●      | 3             | 6.35  | 2.38 | 0.8 | 2.8 | 1.8 |
| NP-TCGW110204SE3 | ●      | 3             | 6.35  | 2.38 | 0.4 | 2.8 | 1.6 |
| NP-TCGW110208SE3 | ●      | 3             | 6.35  | 2.38 | 0.8 | 2.8 | 1.8 |
| NP-TCGW110204FS3 | ●      | 3             | 6.35  | 2.38 | 0.4 | 2.8 | 1.6 |
| NP-TCGW110208FS3 | ●      | 3             | 6.35  | 2.38 | 0.8 | 2.8 | 1.8 |
| NP-TCGW110204GS3 | ●      | 3             | 6.35  | 2.38 | 0.4 | 2.8 | 1.6 |
| NP-TCGW110208GS3 | ●      | 3             | 6.35  | 2.38 | 0.8 | 2.8 | 1.8 |

# CBN Grade for Sintered Alloys and Cast Irons

## Positive Inserts (With Hole)

### G Class

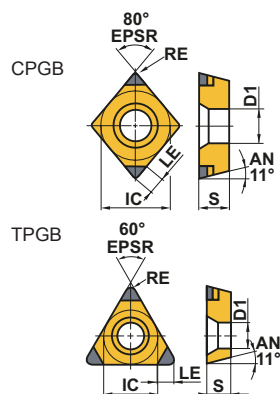







|               |  |  |  |
|---------------|--|--|--|
| NEW PETIT CUT |  |  |  |
| NP_002        |  |  |  |
|               |  |  |  |
| NEW PETIT CUT |  |  |  |
| NP_003        |  |  |  |
|               |  |  |  |







(mm)

| Order Number     | MB4120 | Cutting Edges | IC    | S    | RE  | D1  | LE  |
|------------------|--------|---------------|-------|------|-----|-----|-----|
| NP-CPGB080202SE2 | ●      | 2             | 7.94  | 2.38 | 0.2 | 3.5 | 1.8 |
| NP-CPGB080204SE2 | ●      | 2             | 7.94  | 2.38 | 0.4 | 3.5 | 1.9 |
| NP-CPGB090302SE2 | ●      | 2             | 9.525 | 3.18 | 0.2 | 4.5 | 1.8 |
| NP-CPGB090304SE2 | ●      | 2             | 9.525 | 3.18 | 0.4 | 4.5 | 1.9 |
| NP-CPGB090308SE2 | ●      | 2             | 9.525 | 3.18 | 0.8 | 4.5 | 2.1 |
| NP-CPGB080202FS2 | ●      | 2             | 7.94  | 2.38 | 0.2 | 3.5 | 1.8 |
| NP-CPGB080204FS2 | ●      | 2             | 7.94  | 2.38 | 0.4 | 3.5 | 1.9 |
| NP-CPGB090302FS2 | ●      | 2             | 9.525 | 3.18 | 0.2 | 4.5 | 1.8 |
| NP-CPGB090304FS2 | ●      | 2             | 9.525 | 3.18 | 0.4 | 4.5 | 1.9 |
| NP-CPGB090308FS2 | ●      | 2             | 9.525 | 3.18 | 0.8 | 4.5 | 2.1 |
| NP-TPGB090202SF3 | ●      | 3             | 5.56  | 2.38 | 0.2 | 2.9 | 1.5 |
| NP-TPGB090204SF3 | ●      | 3             | 5.56  | 2.38 | 0.4 | 2.9 | 1.6 |
| NP-TPGB110302SF3 | ●      | 3             | 6.35  | 3.18 | 0.2 | 3.4 | 1.5 |
| NP-TPGB110304SF3 | ●      | 3             | 6.35  | 3.18 | 0.4 | 3.4 | 1.6 |
| NP-TPGB110308SF3 | ●      | 3             | 6.35  | 3.18 | 0.8 | 3.4 | 1.8 |
| NP-TPGB090202SE3 | ●      | 3             | 5.56  | 2.38 | 0.2 | 2.9 | 1.5 |
| NP-TPGB090204SE3 | ●      | 3             | 5.56  | 2.38 | 0.4 | 2.9 | 1.6 |
| NP-TPGB110302SE3 | ●      | 3             | 6.35  | 3.18 | 0.2 | 3.4 | 1.5 |
| NP-TPGB110304SE3 | ●      | 3             | 6.35  | 3.18 | 0.4 | 3.4 | 1.6 |
| NP-TPGB110308SE3 | ●      | 3             | 6.35  | 3.18 | 0.8 | 3.4 | 1.8 |
| NP-TPGB090202FS3 | ●      | 3             | 5.56  | 2.38 | 0.2 | 2.9 | 1.5 |
| NP-TPGB090204FS3 | ●      | 3             | 5.56  | 2.38 | 0.4 | 2.9 | 1.6 |
| NP-TPGB110302FS3 | ●      | 3             | 6.35  | 3.18 | 0.2 | 3.4 | 1.5 |
| NP-TPGB110304FS3 | ●      | 3             | 6.35  | 3.18 | 0.4 | 3.4 | 1.6 |
| NP-TPGB110308FS3 | ●      | 3             | 6.35  | 3.18 | 0.8 | 3.4 | 1.8 |
| NP-TPGB090202GS3 | ●      | 3             | 5.56  | 2.38 | 0.2 | 2.9 | 1.5 |
| NP-TPGB090204GS3 | ●      | 3             | 5.56  | 2.38 | 0.4 | 2.9 | 1.6 |
| NP-TPGB110302GS3 | ●      | 3             | 6.35  | 3.18 | 0.2 | 3.4 | 1.5 |
| NP-TPGB110304GS3 | ●      | 3             | 6.35  | 3.18 | 0.4 | 3.4 | 1.6 |
| NP-TPGB110308GS3 | ●      | 3             | 6.35  | 3.18 | 0.8 | 3.4 | 1.8 |

● : Inventory maintained in Japan. (1 insert in one case.)

## Application Examples

| Insert             |                             | NP-DCGW11T308SF2                                                                                                                           | NP-DCGW11T308SF2                                                                                                                            | NP-DCGW11T308SF2                                                                                                                                                                                                         |
|--------------------|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Workpiece          |                             | General Sintered Alloy                                                                                                                     | General Sintered Alloy                                                                                                                      | Iron-based Sintered Alloy (60HRB)<br>$Ra \leq 1.0 \mu m$                                                                                                                                                                 |
|                    |                             |                                                           |                                                           |                                                                                                                                       |
| Component          |                             | Housing(Interrupted Boring)                                                                                                                | Case(Interrupted Boring)                                                                                                                    | Pinion(Interrupted Facing)                                                                                                                                                                                               |
| Cutting Conditions | Cutting Speed $v_c$ (m/min) | 200                                                                                                                                        | 180                                                                                                                                         | 200                                                                                                                                                                                                                      |
|                    | Feed per Rev. $f$ (mm/rev)  | 0.07                                                                                                                                       | 0.25                                                                                                                                        | 0.04 – 0.05                                                                                                                                                                                                              |
|                    | Depth of Cut $a_p$ (mm)     | 0.2                                                                                                                                        | 0.2 – 0.3                                                                                                                                   | 0.4                                                                                                                                                                                                                      |
| Cutting Mode       |                             | Wet Cutting                                                                                                                                | Wet Cutting                                                                                                                                 | Wet Cutting                                                                                                                                                                                                              |
| Results            |                             |  <p>Double the tool life of the conventional product.</p> |  <p>Double the tool life of the conventional product.</p> |  <p>As compared with the conventional product, good surface finishes were maintained and 2.5 times longer tool life was achieved.</p> |

| Insert             |                             | NP-TNGA160408SF3                                                                                                                                                                                                                                               | NP-TNGA160408SE3                                                                                                                                                                                                          | NP-CNGA120408SF2                                                                                                                                                                |
|--------------------|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Workpiece          |                             | High Strength Sintered Alloy                                                                                                                                                                                                                                   | General Sintered Alloy                                                                                                                                                                                                    | Cast Iron                                                                                                                                                                       |
|                    |                             |                                                                                                                                                                             |                                                                                                                                       |                                                                                            |
| Component          |                             | Sprocket(Continuous Boring)                                                                                                                                                                                                                                    | Sprocket(Interrupted Facing)                                                                                                                                                                                              | Mechanical Parts(Interrupted Facing)                                                                                                                                            |
| Cutting Conditions | Cutting Speed $v_c$ (m/min) | 250                                                                                                                                                                                                                                                            | 240                                                                                                                                                                                                                       | 600                                                                                                                                                                             |
|                    | Feed per Rev. $f$ (mm/rev)  | 0.1                                                                                                                                                                                                                                                            | 0.12                                                                                                                                                                                                                      | 0.175 – 0.25                                                                                                                                                                    |
|                    | Depth of Cut $a_p$ (mm)     | 0.1                                                                                                                                                                                                                                                            | 0.05                                                                                                                                                                                                                      | 0.15 – 0.2                                                                                                                                                                      |
| Cutting Mode       |                             | Wet Cutting                                                                                                                                                                                                                                                    | Wet Cutting                                                                                                                                                                                                               | Dry Cutting                                                                                                                                                                     |
| Results            |                             |  <p>When comparing with the conventional product after machining the same number of workpieces, flank wear was smaller and further tool life extension can be expected.</p> |  <p>As compared with the conventional cermet product, higher surface quality and more than 4 times longer tool life was achieved.</p> |  <p>There is no abnormal damage and more than 1.5 times longer tool life was achieved.</p> |

The above application examples are customer's applications, so it can be different from the recommended conditions.

## Recommended Cutting Conditions

### Sintered Alloys

| Work Material                 | Grade         | Cutting Conditions | vc (m/min) |     |     |     |     | f (mm/rev) | ap   | Cutting Mode |
|-------------------------------|---------------|--------------------|------------|-----|-----|-----|-----|------------|------|--------------|
|                               |               |                    | 100        | 150 | 200 | 250 | 300 |            |      |              |
| General Sintered Alloys       | <b>MB4120</b> | Turning            |            |     |     |     |     | ≤0.2       | ≤0.3 | Dry, Wet     |
| High Strength Sintered Alloys | <b>MB4120</b> | Turning            |            |     |     |     |     | ≤0.2       | ≤0.3 | Dry, Wet     |
| Hardened Sintered Alloys      | <b>MB4120</b> | Turning            |            |     |     |     |     | ≤0.2       | ≤0.3 | Dry, Wet     |

### Cast Irons

| Work Material   | Grade         | Cutting Conditions | vc (m/min) |     |     |     |     | f (mm/rev) | ap   | Cutting Mode |
|-----------------|---------------|--------------------|------------|-----|-----|-----|-----|------------|------|--------------|
|                 |               |                    | 100        | 150 | 200 | 250 | 300 |            |      |              |
| Gray Cast Irons | <b>MB4120</b> | Turning            |            |     |     |     |     | ≤0.2       | ≤0.3 | Dry, Wet     |

#### For Your Safety

●Don't handle inserts and chips without gloves. ●Please machine within the recommended application range and exchange expired tools with new ones in advance of breakage. ●Please use safety covers and wear safety glasses. ●When using compounded cutting oils, please take fire precautions. ●When attaching inserts or spare parts, please use only the correct wrench or driver.



**MMC Hardmetal (Thailand) Co., Ltd.**  
CTI Tower 24th Floor, 191/32 Ratchadapisek Road,  
Klongtoey, Klongtoey, Bangkok, 10110 Thailand  
Tel : +66-2661-8170 Fax : +66-2661-8175

**Thailand Rayong Branch**  
24/1 Moo4 ESIE Plaza 1, 1st Flor., unit G6-B and G6-C,  
Tambon Pluak Daeng, Rayong 21140 Thailand  
Tel : +66-3895-5658 Fax : +66-3895-5659

**Singapore Branch**  
33 Ubi Avenue3, #05-14 Vertex, Singapore  
408868  
Tel : +65-6634-8250 Fax : +65-6634-8257

**Ho Chi Minh Representative Office**  
1205 12th Floor SROC, 2A-4A Ton Duc Thang, Ben  
Nghe, Dist. 1, Ho Chi Minh City, Vietnam  
Tel : +84-28-3829-7700 Fax : +84-28-3824-3344

**Thailand Amata Nakorn Branch**  
Amata Nakorn Industrial Estate Phase 9  
700/843 Moo 5, Tambon Nongkakha, Amphur  
Phanthong, Chonburi, 20160 Thailand  
Tel : +66-3821-0728 Fax : +66-3821-0732

**Thailand Korat Branch**  
1444/2 Moo13, Tambon Choho, Amphur Muang Nakhon  
Ratchasima, Nakhon Ratchasima 30310 Thailand  
Tel : +66-6-1416-7246

**Indonesia Representative Office**  
MM2100 Industrial Town  
Jl. Jawa Blok GG-6 No.2 Jatiwangi, Cikarang,  
Bekasi Indonesia 17520  
Tel : +62-21-2214-3639 Fax : +62-21-2214-3745

**Hanoi Representative Office**  
601B 6th Floor Giang Vo Lake View Building, D10  
Giang Vo, Ba Dinh District, Hanoi, Vietnam  
Tel : +84-24-3772-8362 Fax : +84-24-3772-8299

<http://www.mitsubishicarbide.com/en/>  
(Tools specifications subject to change without notice.)

EXP-18-E002  
2018.5.T(-)